


7 1/2 0.035
~ 130W

LATITUDE 38° 22' 30"
38° 25'

LONGITUDE 82° 40'

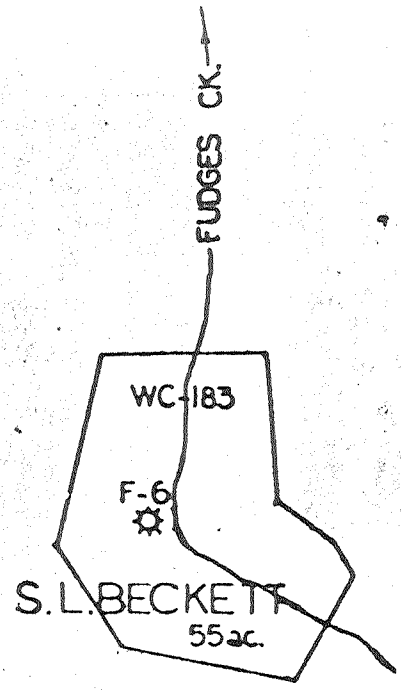

15' calc 2.91 S
1,30W

SOUTHEASTERN GAS COMPANY
AND AFFILIATED COMPANIES
P. O. BOX 2347
CHARLESTON, W. VA. 25328

FILE NO. _____	I THE UNDERSIGNED, HEREBY CERTIFY THAT THIS PLAT IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND SHOWS ALL THE INFORMATION REQUIRED BY LAW AND THE REGULATIONS ISSUED AND PRESCRIBED BY THE DEPARTMENT OF MINES. (SIGNED) _____ R. P. F. _____ L. L. S. _____	PLACE SEAL HERE
DRAWING NO. _____		
SCALE _____		
MINIMUM DEGREE OF ACCURACY _____		
PROVEN SOURCE OF ELEVATION _____		

(+) DENOTES LOCATION OF WELL ON UNITED STATES TOPOGRAPHIC MAPS
FORM IV-B
(8-78)



DATE _____, 19____
OPERATOR'S WELL NO. F-6
API WELL NO. 47-011-622
STATE COUNTY PERMIT

STATE OF WEST VIRGINIA
DEPARTMENT OF MINES
OIL AND GAS DIVISION

WELL TYPE: OIL ___ GAS ___ LIQUID INJECTION ___ WASTE DISPOSAL ___
(IP ° CAS °, PRODUCTION ___ STORAGE ___ DEEP ___ SHALLOW ___)

LOCATION: ELEVATION 610 Top Est WATER BED
DISTRICT GRANT COUNTY CABELL
QUADRANGLE WEST HARRIS / m. Han WC

SURFACE OWNER _____ ACREAGE _____
OIL & GAS ROYALTY OWNER Samuel L. Beckett LEASE ACREAGE _____
LEASE NO. _____

PROPOSED WORK: DRILL ___ CONVERT ___ DRILL DEEPER ___ RE-DRILL ___ FRACTURE OR
STIMULATE ___ PLUG OFF OLD PORTION ___ PERFORATE NEW
FORMATION ___ OTHER PHYSICAL CHANGE IN WELL (SPECIFY) _____

PLUG AND ABANDON ___ CLEAN OUT AND REPLUG ___
TARGET FORMATION _____ ESTIMATED DEPTH _____
WELL OPERATOR _____ DESIGNATED AGENT _____
ADDRESS _____

HAMILTON GAS COMPANY WELL RECORD

S. L. BECKETT FARM,
 ON THE HEAD-WATERS OF FUDGES, CAVILL
 AND BIG TWO MILE, CABELL CO., W. VA.

<u>FORMATION</u>	<u>TOP</u>	<u>BOTTOM</u>	<u>REMARKS</u>
Red Rock	0	14	Water at 742 ft. - Hole full.
Lime	14	64	" " 800 " - enough to drill.
Slate	64	114	
Lime	114	160	Steel Line at 3,635 ft.
Sand	150	192	
Slate	192	232	35/10 in 1" at 3,152 ft.
Lime	232	300	26/10 M. in 3" when shut in Jan.
Sand	300	320	21st = 2,015,085 cu. ft.
Red Rock	320	338	
Lime and Shells	338	392	Shot Jan. 18, 1930, with 3770 lbs.
Slate	392	444	gelatine. Top of shot 3148 ft.
Broken Lime	444	513	Bottom of shot 3628 ft.
Coal	513	520	
Lime and Shells	520	580	
White Slate	580	627	
Broken Lime	627	742	
Sand	742	757	
Lime	757	800	
Black Slate	800	835	
Broken Lime	835	947	
Sand	947	978	
Slate and Broken Lime	978	1150	
Sand	1150	1167	
Slate and Lime	1167	1260	
First Salt Sand	1260	1473	
Soap Stone	1473	1495	
Lime and Shells	1495	1522	
Sand	1522	1562	
Broken-up Lime	1562	1614	
Sand	1614	1624	
Black Slate	1624	1628	
Big Lime	1628	1827	
Keener Sand	1827	1878	
Big Injun	1878	1970	
Black Lime	1970	1985	
Black Slate	1985	2015	
Lime and Shells	2015	2420	
Coffee Shale	2420	2425	
Berea Grit	2425	2437	
Black Shale	2437	2457	
Lime Shells	2457	2762	
Brown Shale	2762	2870	
White Slate	2870	3240	
Lime	3240	3260	
Shale	3260	3270	
Slate	3270	3354	
Shale	3354	3635	
Total Depth		3635	

Casing Record

13" Conductor 12 ft.
 10" Casing 77 "
 8 1/2" " 765 "
 6 5/8" " 1973 "
 (All left in well)

Tubed with 3" Tubing. Amount ran
 3635, - two joints perforated.
 Top of perforation 3575, bottom 361
 Bottom set anchor packer used.

Drillers

Martin Burke - Weston, W. Va
 W. B. Brown - " " "

Tool Dressers

M. F. Tierney - Weston, W. Va
 T. K. White - " " "

Well commenced Nov. 8, 1929.
 Well completed Jan. 21, 1930.

2450 gal. - Packer set

AWB

Cabell 622

1981 prod. data - 29,177 Mcf in 365 days on-line