

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS**

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: S.L. Toothman Operator Well No.: No.2
 Location: Elevation: 1556' Quadrangle: Mannington 7.5'
 District: Mannington County: Marion
 Latitude: _____ Feet South of: _____ Deg. _____ Min. _____ Sec.
 Longitude: _____ Feet West of: _____ Deg. _____ Min. _____ Sec.

Well Type: Oil X Gas _____ WIW _____

Company: East Resources Inc. Coal Operator Consol Energy
P.O. Box 5519 or Owner 1000 Consol Energy Dr.
Vienna, WV 26105 Canonsburg, PA 15317-6506

Agent: Philip S. Ondrusek Coal Operator _____
 or Owner _____

Permit Issued: 1/28/11

RECEIVED
Office of Oil & Gas
SEP 29 2011

AFFIDAVIT

State of West Virginia, County of Wood ss:

Philip Ondrusek and Kenneth Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 7th day of July, 20 11 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED		LEFT
Cement	2430'	2300'	10"	285'	78'
Cement	2100'	1950'	8 1/4"	415'	1300'
Cement	1850'	1700'	6 5/8"	1680'	700'
Cement	1315'	1000'	5 3/16"	2430'	224'
Cement	440'	250'			
Cement	100'	0'			
Perforated 6 5/8" casing, 1 shot/10' from 2380' - 2280', 2100' - 2000', 1300' - 1200', 1 shot/1' from 1237' - 1227', 1 shot/10' from 1150' - 1050' & 1 shot/1' from 1115' - 1105'.					
6% Gel Between Cement Plugs					


Description of monument: 2" x 7' and that the work of plugging and filling said well was completed on the 17th day of August, 20 11

And further deponents saith not.

Philip Ondrusek
Kenneth Dotson

Sworn and subscribed before me this 28th day of September, 20 11
My commission expires: Nov. 12, 2018

Notary Public [Signature]
Affidavit reviewed by the Office of Oil and Gas: [Signature]
Title: Manager

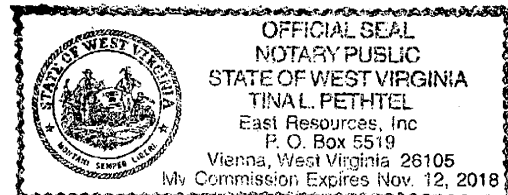

10/07/2011