

STATE OF WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: KRUZA Operator Well No.: 71595

LOCATION: Elevation: 962' Quadrangle: MANNINGTON 7.5'  
District: MANNINGTON County: MARION  
Latitude: 6687' Feet South of 38 Deg. 32 Min. 30 Sec.  
Longitude: 6213' Feet West of 80 Deg. 17 Min. 30 Sec.

Well Type: OIL  GAS

Company UNKNOWN - WVDEP PAID PLUGGING CONTRACT Coal Operator CONSOLIDATION COAL COMPANY, C/O LEATHERWOOD, INC.  
601 57TH STREET or Owner CNX CENTER  
CHARLESTON, WV 25304 1000 CONSOL ENERGY DRIVE  
Coal Operator CANONSBURG, PA 15317  
Agent H. JASON HARMON or Owner \_\_\_\_\_  
Permit Issued Date 03-31-2025

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of LEWIS ss:

JAMES CLAYTON ("CLAY") COCHRAN and KEVIN PAUL QUESENBERRY being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 6TH day of MAY, 2025, and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
TAG TD	1693'			
SHOT OFF PACKER	1650'			(5 SHOTS)
PULL TBG	SURFACE		2" TBG (1650')	43'
BH PLUG CEMENT	1650'	1350'	PUMP CLASS A CEMENT (36 SACKS)	GEL SPACER 1350' TO 1050'
PERF 8 HOLES	995' & 300'	(4 SHOTS AT EACH INTERVAL)		
CEMENT PLUG	1050'	750'	PUMP CLASS A CEMENT (36 SACKS)	GEL SPACER 750' TO 350'
SURFACE PLUG CEMENT	350'	SURFACE	PUMP CLASS A CEMENT (104 SACKS)	

Description of monument: ONE JOINT PIPE: 36" ABOVE; 10' BELOW; TO STATE SPECS and that the work of plugging and filling said well was completed on the 14TH day of MAY, 2025


And further deponents saith not.

*[Signature]*  
Kevin P. Quesenberry

Sworn and subscribe before me this 21ST day of MAY, 2025

My commission expires: OCTOBER 10, 2029

*[Signature]*  
P. Wayne Ammons  
Notary Public

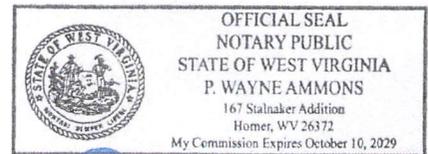

Affidavit reviewed by the Office of Oil and Gas: Geff Bussert Title: Inspector

06/06/2025

