LATITUDE 39 37 30

LONGITUDE 80 07 30

2.51S
1.86W

7'5 OGIS topo location

7.5' loc _____ 15' loc (calc.) _____

Company 9514

Farm SARAH E MOORE

Quad GRANT TOWN

County MARION

District PAW PAW

WELL LOCATION MAP

File No. 30699

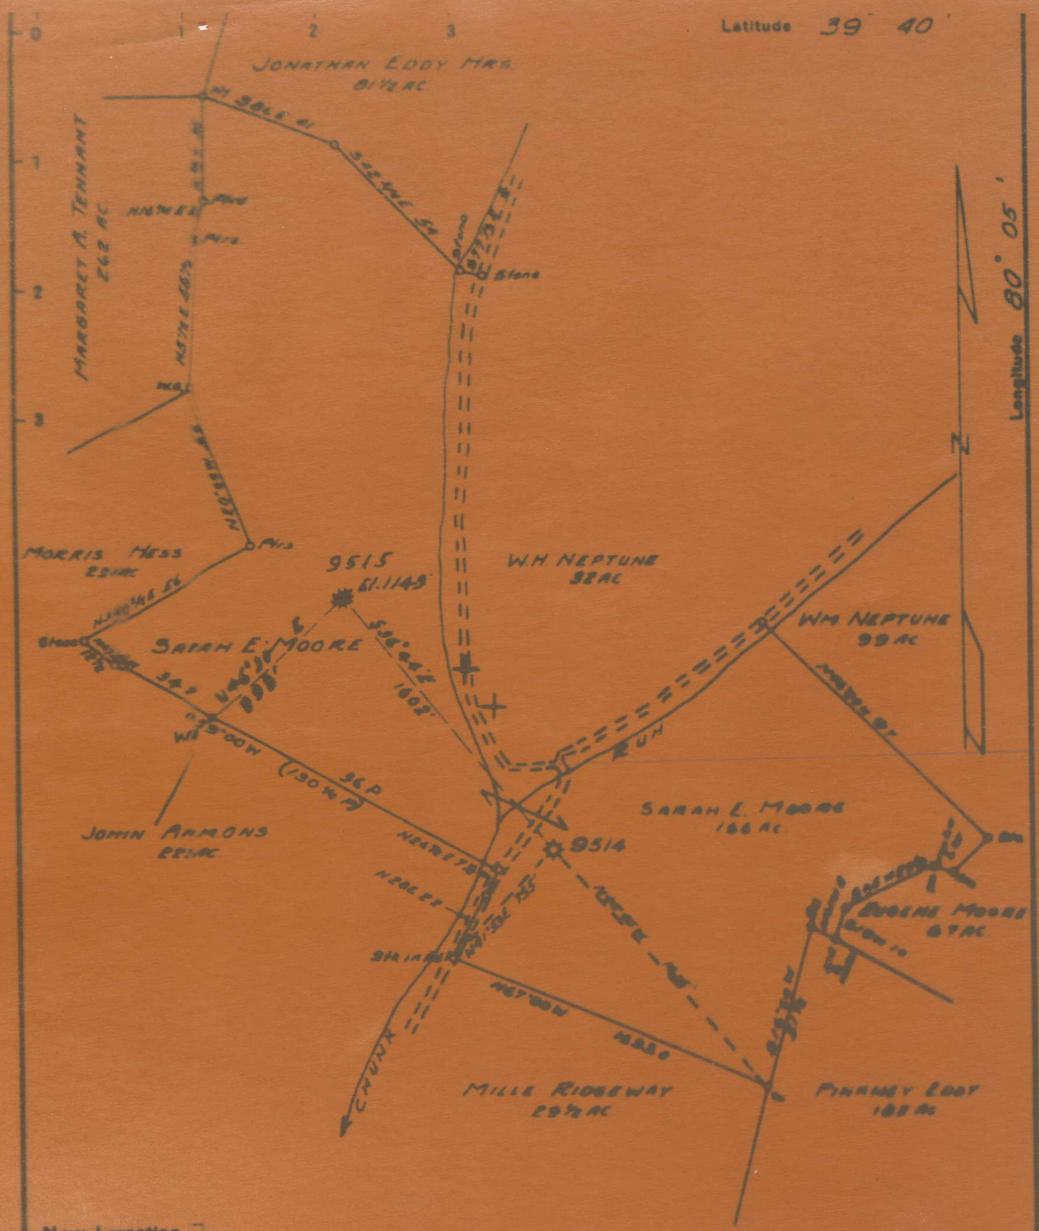

New Location ☐
Drill Deeper ☐
Abandonment ☒ 9514

MAP BUT IN NEED OF PA 306 PRA

Company MOPE NATURAL GAS CO
Address CLARKSBURG W.VA
Farm SARAH E MOORE
Tract _____ Acres 166 Lease No. 61620

STATE OF WEST VIRGINIA
DEPARTMENT OF MINES
OIL AND GAS DIVISION
CHARLESTON

WELL LOCATION MAP

SARAH E. MOORE NO. 9514 WELL.

699A

Pawpaw District, Marion County, W. Va.
By Hope Natural Gas Co., 445 W. Main St., Clarksburg, W. Va.
Abandoned under permit Mar-.....-A?
On 166 acres.
Elevation, 1048' L.
Drilling completed Nov. 21, 1914.
Salt water at 1320'.
10" casing, 487' (pulled); 8¼", 1320' (pulled); 6⅝", 1612';
3" tubing, 1776' (pulled).
Casing not cemented.
Coal was encountered at 270-274 and 457-463'.
Gas well. Record to Dept. of Mines dated March 8, 1951.
Record to ROT from Mrs. Griffith June 24, 1951. Old File No. 779.

	Top.	Bottom.
Mapletown (Sewickley) Coal	270 -	274
Pittsburgh Coal	457 -	463
Little Dunkard Sand	757 -	775
First Salt Sand	1080 -	1130
Second Salt Sand (water, 1320')	1280 -	1390
Little Lime	1592 -	1605
Pencil Cave	1605 -	1612
Big Lime	1612 -	1674
Big Injun Sand (gas, 1680, 1756, 1780')	1668 -	....
Total depth		1803

OG-10

Inactive

179

STATE OF WEST VIRGINIA
DEPARTMENT OF MINES
OIL AND GAS DIVISION

WELL RECORD

Permit No. MAR-699-A

~~Oil~~ or Gas Well (KIND)

Company Hope Natural Gas Company.
Address 445 West Main St. Clarksburg, W.Va.
Farm Sarah E. Moore Acres 166
Location (waters)
Well No. 9515 M.P. 55 Elev. 1048
District Paw Paw County Marion
The surface of tract is owned in fee by
Address
Mineral rights are owned by
Address
Drilling commenced
Drilling completed Comp. Nov. 21, 1914
Date Shot From To
With
Open Flow /10ths Water in Inch
/10ths Merc. in Inch
Volume Cu. Ft.
Rock Pressure lbs. hrs.
Oil bbls., 1st 24 hrs.
Fresh water feet feet
Salt water 1320 feet feet

Casing and Tubing	Used in Drilling	Left in Well	Packers
Size			
16			Kind of Packer
13			
10	487	Pulled	Size of
8¼	1320	Pulled	
6⅝	1612	1612	Depth set
5 3/16			
3	1776	Pulled	Perf. top
2			Perf. bottom
Liners Used			Perf. top
			Perf. bottom

NOT CASING CEMENTED SIZE No. Ft. Date

COAL WAS ENCOUNTERED AT 270 FEET 48 INCHES
457 FEET 72 INCHES FEET INCHES
FEET INCHES FEET INCHES

Formation	Color	Hard or Soft	Top	Bottom	Oil, Gas or Water	Depth Found	Remarks
Mapletown Coal			270	274			
Pittsburgh Coal			457	463			
Little Dunkard			757	775			
First Salt			1080	1130			
Second Salt			1280	1390	water	1320	
Little Lime			1592	1605			
Pencil cave			1605	1612			
Big Lime			1612	1674			
Big Injun			1668		gas 1680 1756 1780		
Total depth				1803			

MAR 1951 WEST VIRGINIA DEPARTMENT OF MINES

(Over)

JUN 24 1951

Formation	Color	Hard or Soft	Top	Bottom	Oil, Gas or Water	Depth Found	Remarks

March 8, 1951

Date ~~Hope Natural Gas Company.~~, 19

APPROVED, Owner

By E. H. Tollefson

(Title) General Superintendent

MATHEWS PRINTING AND LITHOGRAPHING CO
CHARLESTON W VA