

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address
FREDRICK E. LILLEY
Lease or Property Owner
RT.1 BOX 64 MANNINGTON, WV 26582
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26582
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5071
Well No.
LILLEY, FREDRICK E.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *Bill Humber*

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MIKE MITCHELL and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 27th day of September, 2011 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In
	Cleaned 12 1/4" hole from the surface to 102'. Reduce hole to 9 7/8". Cleaned 9 7/8" hole from 102' to the top of the 7" casing at 870'. Reduced hole to 6 1/4". Cleaned 6 1/4" hole from 870' to 1867'. Tagged plug at 1867'. Removed 565' of 7" casing from 870' to 1471'. Left an unknown amount of 7" casing in the hole from 1471' to an unknown depth. Cut remaining 7" casing at the following depths; 1860', 1758', 1660' and 1560'. Cleaned 9 7/8" hole from 870' to the top of the 7" casing at 1471'. Cleaned 9 7/8" hole through the Pittsburgh Coal 1138' - 1145'. Left 13' of 16" conductor pipe in the hole from 13' to surface. Cementd hole from 1867' back to surface as follows: From 1867' to 1471" with 9.6ppg Aquagel. From 1471' to 1345' with 60 sacks of 35/65 Poz Mix Cement From 1345' to 1038' with 150 sacks of Thixotropic Cement w/ dye. From 1038' to surface with 337 sacks of Econofill Cement. A total of 16.43bbl of Aquagel and 547 sacks of cement were used to fill the hole from 1867' to surface. Cement did circulate at the surface.	16" Conductor 7" Casing	0' 565'	13' 396'
Coal Seams		Description of Monument		
<u>PITTSBURGH</u>	<u>1138' to 1145'</u>	77" of 7" casing w/company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

... and that the work of plugging and filling said well was completed on the 15th day of October, 2011

And further deponents saith not.

DEC 22 2011

Mike Mitchell
Mike Mitchell


WV Department of Energy
Environmental Protection

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 5th day of December, 2011

My commission expires:

March 18, 2020

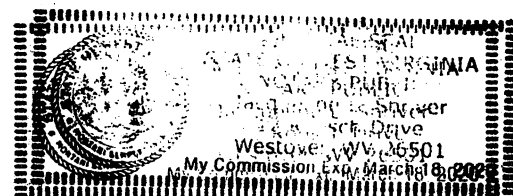

Jacqueline S. Shuman
Notary Public

Permit No. 47-49-02185-P
Well No. 5071