

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

MCELROY COAL COMPANY
Coal Operator or Owner
RD.4 BOX 425 MOUNDSVILLE, WV 26041-9802
Address

MCELROY COAL COMPANY
Coal Operator or Owner
RD.4 BOX 425 MOUNDSVILLE, WV 26041-9802
Address

KATHERINE PAULINE HICKS
Lease or Property Owner
RD 3 BOX 95 CAMERON, WV 26033
Address

MCELROY COAL COMPANY
Name of Well Operator
RD.4 BOX 425 MOUNDSVILLE, WV 26041-9802
Complete Address

CAMERON, WV 7.5'
Well Location

CAMERON
District

MARSHALL
County

M-1519
Well No.

HICKS, KATHERINE PAULINE
Farm

STATE INSPECTOR SUPERVISING PLUGGING _____

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and **KEVIN WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 2nd day of March, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
		16" Conductor	0'	20"
		7" Casing	670'	832'
<p>Cemented hole from 2023' to surface as follows: From 2023' to 1074' with Expandable Cement. From 1074' to 766' with 175 sacks of Thixotropic Cement with green dye. From 766' to surface with Expandable Cement. A total of 570 sacks of Expandable Cement and 175 sacks of Thixotropic cement were used to fill the hole from 2023' to surface. Cement did circulate at the surface.</p>				
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	(866' - 874')	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

... and that the work of plugging and filling said well was completed on the 22nd day of March, 2012


And further deponents saith not.

Mark Wilson
Mark Wilson

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 30th day of March, 2012

My commission expires:
March 18, 2020

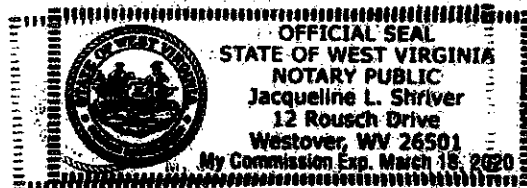

Jacqueline L. Shriver
Notary Public

Permit No. 47-051-01394-P
Well No. M-1519

05/04/2012