

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO. - OHIO VALLEY OPERATIONS
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
CONSOLIDATION COAL CO. - OHIO VALLEY OPERATIONS
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
CHARLES ALBERT WITSBERGER II
Lease or Property Owner
250 DRY RIDGE ROAD, CAMERON, WV 26033
Address

CONSOLIDATION COAL CO. - OHIO VALLEY OPERATIONS
Name of Well Operator
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Complete Address
MAJORSVILLE, WV 7.5
Well Location
WEBSTER
District
MARSHALL
County
SGW-151
Well No.
WITSBERGER, CHARLES ALBERT
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William Hochstetler* 5-29-13

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and **KEVIN WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 4th day of April, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In
Formation				
	Cleaned inside 4 1/2" casing from the surface to 1847'. Tagged solid plug at 1847'. Cut 4 1/2" casing at the following depths: 1634', 1540', 1448', 1355', 1261', 1166', 1043' and 218'. Section Milled a 10' window in the 4 1/2" casing from 1740' to 1750'. Perforated the pipe with six shots at the following depths: 1650', 1530', 1440', 1340', 1220', 1130' and 1030'. Cemented bottom hole from 1847' to 955' with 50 sacks of Expandable Cement with Gas Blocker additive. Jet cut 4 1/2" casing, 7" casing, 8 5/8" casing, and 10 3/4" casing at the following depths: 911', 861', 811', 761', 712', 709.5', 707', 704.5', 702', 649', 646.5', 644' and 555'. Jet cut 4 1/2" casing, 7" casing, 8 5/8" casing and 10 3/4" casing through the Pittsburgh Coal seam from 705' to 711'.	13" Casing 10 3/4" Casing 8 5/8" Casing 7" Casing 4 1/2" Casing	0' 0' 0' 0' 0'	72' 732' 1344' 1735' 1846'
	Cemented hole from the top of the bottom hole plug at 955' back to surface as follows: From 955' to 605' with 35 sacks of Thixotropic Cement with green dye. From 605' to the surface with 55 sacks of Expandable Cement. Cement did circulate at the surface.			
Coal Seams		Description of Monument		
Pittsburgh Coal	705' to 711'	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas
MAY 30 2013
WV Department of
Environmental Protection


... and that the work of plugging and filling said well was completed on the 18th day of April, 2013.

And further deponents saith not.

Mark Wilson
Mark Wilson

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 6th day of May 2013

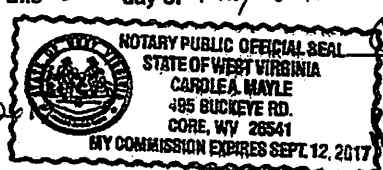

Carol A. Mayle
Notary Public

My commission expires: 9-12-2017

Permit No. 47-051-00379-P
Well No. SGW-151

05/31/2013