

ORIGINAL

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
JERRY K. RIGGS
Lease or Property Owner
RR 3 BOX 80 CAMERON, WV 26033
Address

MCELROY COAL COMPANY
Name of Well Operator
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Complete Address
CAMERON, WV 7.5'
Well Location
LIBERTY
District
MARSHALL
County
M-1516
Well No.
RIGGS, JERRY K.
Farm

STATE INSPECTOR SUPERVISING PLUGGING

Bill Woodruff
9-6-13

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 15th day of July, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Cleaned 11" hole from the surface to 369'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 369' to 518'. Tagged top of 8 5/8" casing at 518'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 518' to 1351'. Tagged solid plug at 1351'. Left 779' of 8 5/8" casing in the hole from 518' to 1297' due to casing being bonded in the hole. Cut 8 5/8" casing at the following depths: 1208', 1106', 997', 835', 711' and 635'. Section Milled 20' window in 8 5/8" casing from 873' to 893'. Section Milled window through Pittsburgh Coal seam from 879' to 887'.	13" Casing 8 5/8" Casing	0' 0'	30' 779'	
Cemented hole from 1353' to surface as follows: From 1353' to 1087' with Expandable Cement. From 1087' to 779' with 90 sacks of Thixotropic Cement with green dye. From 779' to surface with Expandable Cement. A total of 345 sacks of Expandable Cement and 90 sacks of Thixotropic Cement were used to cement the hole from 1353' to surface. Cement did circulate at the surface. Left 30' of 13" conductor casing in the hole from the surface to 30'.				
Coal Seams		Description of Monument		
Pittsburgh	(879' - 887')	77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas

SEP 11 2013

WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 7th day of August, 2013

And further deponents saith not.

Mark Wilson
Mark Wilson


Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 19th day of August 2013

Carole A. Mayle
Notary Public

My commission expires: 9.12.2017

Permit No. 47-51-01559-P
Well No. M-1516

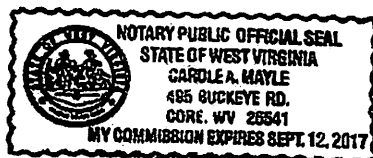

09/27/2013