


STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: TENNANT, MALINDA Operator Well No.: 3

LOCATION: Elevation: 1003' Quadrangle: Blacksville
District: Clay County: Monongalia
Latitude: 3180 Feet South of 39 Deg. 40 Min. 00 Sec.
Longitude: 5600 Feet West of 80 Deg. 10 Min. 00 Sec.



Well Type: OIL _____ GAS x _____

Company NNE Resources LLC Coal Operator CONSOL Mining Co., LLC
707 Virginia St. E., Suite 1200 or Owner Attn: Casey Saunders- BMX Portal
Charleston, WV 25301 332 Enon Church Road, West Finley, PA 15377
Agent Hollie Medley, Regulatory Manager Coal Operator _____
Permit Issued Date 9/5/2025 or Owner _____

AFFIDAVIT


STATE OF WEST VIRGINIA,
County of Monongalia ss:

Dakota Adkins and Sam Barker being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 9 day of December, 2025 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
2 3/8 tubing	0	1785'	1785'	0
5.5" casing	0	2700'	800'	1900'
7" casing	0	Unknown	100'	Unknown
Cement Class A	2600'	2700'		
Gel	1650'	2600'		
Cement Class A	1312'	1650'	CIBP set @ 2,700'	
Gel	800'	1312'		
Cement Class A	0	800'		

Description of monument: 1.5' x 2.5' steel plate painted blue with API and Date and that the work of plugging and filling said well was completed on the 29 day of December, 2025.

And further deponents saith not. Dakota Adkins
SB

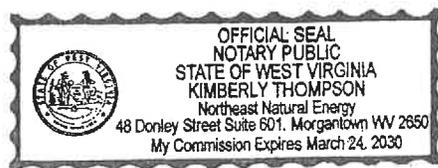

Sworn and subscribe before me this 29th day of January, 2026

My commission expires: March 24, 2030
Notary Public

Affidavit reviewed by the Office of Oil and Gas: Robert J. Hitt 2-3-26 Title: OOG Inspector

02/06/2026



RECEIVED
OFFICE OF GEOL AND GAZ

FEB 03 2026

OFFICE OF
GEOLOGICAL SURVEY

02/06/2026