



west virginia department of environmental protection

Office of Oil and Gas
601 57th Street SE
Charleston, WV 25304
(304) 926-0450
(304) 926-0452 fax

Earl Ray Tomblin, Governor
Randy C. Huffman, Cabinet Secretary
www.dep.wv.gov

August 21, 2014

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-7700616, issued to MOUNTAINEER KEYSTONE, LLC, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin
Chief

Operator's Well No: HAMILTON 212
Farm Name: HAMILTON, TERRY D. & BETTY
API Well Number: 47-7700616
Permit Type: Horizontal 6A Well
Date Issued: 08/21/2014

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACE). Through this permit, you are hereby being advised to consult with USACE regarding this proposed activity.
2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.
9. Operator shall provide the Office of Oil & Gas notification of the date that drilling commenced on this well. Such notice shall be provided by sending an email to DEPOOGNotify@wv.gov within 30 days of commencement of drilling.

WW-6B
(9/13)

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS
WELL WORK PERMIT APPLICATION

77 06 347

1) Well Operator: Mountaineer Keystone, LLC 494501227 Preston Reno Fellowsville 7.5'
Operator ID County District Quadrangle

2) Operator's Well Number: Hamilton 212 Well Pad Name: Hamilton 211-215

3) Farm Name/Surface Owner: Terry D. and Betty Hamilton Public Road Access: Rt. 92

4) Elevation, current ground: 1566.82' Elevation, proposed post-construction: 1562'

5) Well Type (a) Gas Oil Underground Storage
Other

(b) If Gas Shallow Deep
Horizontal

6) Existing Pad: Yes or No No

Handwritten signature
3/25/14

7) Proposed Target Formation(s), Depth(s), Anticipated Thickness and Associated Pressure(s):
Marcellus Shale, 7962' (TVD Heel) - 8045' (TVD Toe), 100 ft., 0.5 psi/ft.

8) Proposed Total Vertical Depth: 8045'

9) Formation at Total Vertical Depth: Marcellus Shale

10) Proposed Total Measured Depth: 13946'

11) Proposed Horizontal Leg Length: 6170'

12) Approximate Fresh Water Strata Depths: surface to 800'

13) Method to Determine Fresh Water Depths: Offsetting wells reported water depths (077-00434, 077-00505, 077-00424, 077-00384, 077-00398)

14) Approximate Saltwater Depths: 1000 - 1800'

15) Approximate Coal Seam Depths: Bakerstown - 190', Brush Creek - 290', Upper Freeport - 350', Lower Freeport - 400', Upper Kittanning - 510', Middle Kittanning - 550', Lower Kittanning - 580'

16) Approximate Depth to Possible Void (coal mine, karst, other): none known

17) Does Proposed well location contain coal seams directly overlying or adjacent to an active mine? Yes No

(a) If Yes, provide Mine Info: Name: _____
Depth: _____
Seam: _____
Owner: _____

RECEIVED
Oil and Gas
APR 10 2014
Department of Environmental Protection

WW-6B
(9/13)

18)

CASING AND TUBING PROGRAM

<u>TYPE</u>	<u>Size</u>	<u>New or Used</u>	<u>Grade</u>	<u>Weight per ft. (lb/ft)</u>	<u>FOOTAGE: For Drilling</u>	<u>INTERVALS: Left in Well</u>	<u>CEMENT: Fill-up (Cu. Ft.)</u>
Conductor	20"	New	H-40	94#	100'	100'	Grout
Fresh Water	13.375"	New	J-55	54.5#	900'	900'	CTS
Coal							
Intermediate	9.625"	New	J-55	36#	1900'	1900'	CTS
Production	5.5"	New	P-110	20#	13,946'	13,946'	TOC@1,700'
Tubing							
Liners							

AS
3/25/14

<u>TYPE</u>	<u>Size</u>	<u>Wellbore Diameter</u>	<u>Wall Thickness</u>	<u>Burst Pressure</u>	<u>Cement Type</u>	<u>Cement Yield (cu. ft./k)</u>
Conductor	20"	30"	0.417"	1530	None	None
Fresh Water	13.375"	17.5"	0.38"	2730	Class A & 1.5% CaCl	1.18
Coal						
Intermediate	9.625"	12.25"	0.352"	3520	Type 1 & 1.5% CaCl	1.2
Production	5.5"	7.875"	0.361"	14360	50/50 - Type 1	1.2
Tubing						
Liners						

PACKERS

Kind:				
Sizes:				RECEIVED Office of Oil and Gas
Depths Set:				APR 10 2014

WV Department of
Environmental Protection

WW-6B
(9/13)

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:

The well will be started with a conductor rig drilling a 30" hole to Conductor programmed depth then running 20" casing and grout cement back to surface. The conductor rig will move out and the drilling rig will move in and rig up. The drilling rig will then spud a 17 1/2" hole and drill to fresh water casing (Surface) to the programmed depth, Run 13- 3/8" casing and cement to surface. The rig will continue drilling a 12- 1/4" intermediate hole to the programmed depth, run 9- 5/8" casing and cement to surface. The rig will then continue to drill a 8- 3/4" hole vertically to a programmed depth, run wireline logs and then plug back the well with the programmed cement to a designed KOP. We will then start drilling the curve and lateral section to the programmed total measured depth, run 5 1/2" casing and cement according to the program.

20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:

The well will be completed using a plug and perforation method and stimulated with a slickwater and sand slurry. The anticipated maximum rate will be 90 bpm and the maximum pressure will be 9,500 psi.

21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 6.91 acres

22) Area to be disturbed for well pad only, less access road (acres): 4.12 acres

23) Describe centralizer placement for each casing string:

20" - No centralizers
13 3/8" - one bow spring centralizer on every other joint
9 5/8" - one bow spring centralizer on every third joint from TD to surface
5 1/2" - one semi-rigid centralizer on every joint from TD of casing to end of curve. Then every other joint to KOP. Every third joint from KOP to 1,700'; there will be no centralizers from 1700' to surface.

24) Describe all cement additives associated with each cement type:

*See attached sheet

25) Proposed borehole conditioning procedures:

*See attached sheet

RECEIVED
Office of Oil and Gas

APR 10 2014

WV Department of
Environmental Protection

Page 3 of 3

08/22/2014

*Note: Attach additional sheets as needed.



Hamilton 212

Cement Additives

- 20" is auger drilled and grouted back to surface.
- The 13-3/8" casing will be cemented to surface with Class A cement and no greater than 3% CaCl (Calcium Chloride).
- The 9-5/8" casing will be cemented to surface with Type 1 cement and no greater than 3% calcium chloride.
- The 5-1/2" production string will be cemented back to 1750' (+/- 200' above the casing shoe for the 9-5/8") with Type 1 or Class A cement retarder (to extend pumpability) cellophane flaked for fluid loss, Bentonite gel as an extender (increased pumpability and fluid loss), a defoaming agent to decrease cement foaming during mixing to insure the cement is of proper weight to placement and possibly a gypsum gas blocking additive to aid in blocking/gas migration (in combination with other additives mentioned here, helps cement achieve a "right-angle" set) during the plastic phase of the cement set-up.

Proposed Borehole Conditioning Procedures:

- Top holes will be drilled on fluid to KOP. At KOP, the wellbore will be loaded with water based mud, barite-weighted mud system with such properties to build a filter-cake on the face to the bore-hole. This will provide lubricity as well as stabilizing the well bore. We will begin rotating the drill string and mud will be circulated upon reaching TD until no further cuttings are observed coming across the shaker screens. Once clean mud is circulated back to surface, we will pull three stands of drill pipe, load the hole, pull three stands and load the hole. The weight indicator on the rig will be monitored for any occurrences of drag and if any are noticed, we will re-run the previous stand of pipe pulled across and circulate 2X bottoms up while watching the shakers for signs of cuttings. Once at the base of the curve, the string will be continuously rotated while pumping 2X bottoms up. We will pull three stands and fill the hole until we reach the vertical section of the well.

RECEIVED
Office of Oil and Gas
APR 10 2014
WV Department of
Environmental Protection

08/22/2014



Mountaineer Keystone
Hamilton #212
Casing Design
Directional Plan #1 (Phoenix)

Other Names:	Hamilton Well
Surface Location:	See Direction Plan
Bottom Hole Location:	See Direction Plan
Total Depth:	13,946' MD / 8,044' TVD

County:	Preston
State:	West Virginia
AFE #:	
RKB:	24
Ground Level:	1,562

Logs	Significant Formations (TVD)	Depth (ft) MD	Depth (ft) TVD	Hole Size	Casing and Cement	Mud	Directional & Surveys Drig /Csg Point
None	Section 1		Grout				
		100	100		20" 94# H-40 STC		Vertical
None	Section 2		Floc		17 1/2" (PDC)	Floc Water	
					Cement: Class A 492 Sacks w/ 30% Excess TOC: Surface (top off if needed)		
Possible CBL after cement job		900	900		13 3/8" 54.5# J-55 BTC		Vertical
None	Section 3		Floc		12 1/4" (PDC)	Floc Water	
					Cement: Type 1 599 Sacks w/ 30% Excess TOC: Surface (top off if needed)		
Possible CBL after cement job		1900'	1900'		9 5/8" 36# J-55 LTC		Vertical
	Section 4		Floc		Mud Data Floc Water From 100 To 1900' Floc Water 1900' 8,350' 12.5-13.0 ppg WBM or SOBA 1900' 13,946'		
Wireline: None Mudloggers: 6,350' - TD KOP @ 6,350' MD					Bit Data 17-1/2" & 12 1/4" PDC From 60' To 1900' 8-3/4" (PDC) 1900' 13,946'		
			SOBM		Directional Data KOP 6350 Build #1 9°/100 ft - angle XX° - Az XX° EOB XXX' / XXXX' Hold 0°/100 ft - angle XX° - Az XX° BOH XXX' / XXXX' EOH XXXX' / XXXX' Build 2 9°/100 ft - angle 90° - Az 335° KOP XXXX' / XXXX' EOB XXX' / 8,196' TD 13,946' MD / 8,044' TVD Lateral XXXX'		
	Wier Sandstone		1,647				
	1st Elk Siltstone		4,602				
	Burkett Shale		7,567				
	Tully (Limestone)		7,587				
	Marcellus		7,872				
		13,946 MD 8044' TVD 89.1 Inclin 335° Azmuth					
					Cement: Type 1 Tail 1.18 ft3/sack +10% Exs in OH = 2709 sacks Tail TOC : 1,700 ft		
					5 1/2" 20# P-110 EG DWC		

Revision 1
Date Last Revised: 19-Dec-13
Ross Schweitzer
Note: Not drawn to scale
Cement Outside Casing Seal Assembly in Annulus

RECEIVED
Office of Oil and Gas
APR 10 2014
WV Department of
Environmental Protection
08/22/2014

WW-9
(9/13)

API Number 47 - _____ - _____
Operator's Well No. Hamilton 212

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Mountaineer Keystone, LLC OP Code 494501227

Watershed (HUC 10) Little Sandy Creek Quadrangle Fellowsville 7.5'

Elevation 1562' County Preston District Reno

Do you anticipate using more than 5,000 bbls of water to complete the proposed well work? Yes No

Will a pit be used? Yes No

If so, please describe anticipated pit waste: _____

Will a synthetic liner be used in the pit? Yes No If so, what ml.? _____

Proposed Disposal Method For Treated Pit Wastes:

- Land Application
- Underground Injection (UIC Permit Number _____)
- Reuse (at API Number _____)
- Off Site Disposal (Supply form WW-9 for disposal location)
- Other (Explain _____)

AS
3/25/14

Will closed loop system be used? If so, describe: Yes. It will contain all of the drilling medium and drill cuttings to be taken to landfill.

Drilling medium anticipated for this well (vertical and horizontal)? Air, freshwater, oil based, etc. Vert. Freshwater, Horiz. water based mud

-If oil based, what type? Synthetic, petroleum, etc.

Additives to be used in drilling medium? Sodium Chloride, Xanthan Gum, PAC R/SL, Caustic Soda, Soda Ash, Barite, Defoamer

Drill cuttings disposal method? Leave in pit, landfill, removed offsite, etc. Landfill

-If left in pit and plan to solidify what medium will be used? (cement, lime, sawdust) If wet cutting, sawdust will be used.

-Landfill or offsite name/permit number? Tucker County Landfill, Davis, WV

I certify that I understand and agree to the terms and conditions of the GENERAL WATER POLLUTION PERMIT issued on August 1, 2005, by the Office of Oil and Gas of the West Virginia Department of Environmental Protection. I understand that the provisions of the permit are enforceable by law. Violations of any term or condition of the general permit and/or other applicable law or regulation can lead to enforcement action.

I certify under penalty of law that I have personally examined and am familiar with the information submitted on this application form and all attachments thereto and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment.

Company Official Signature *Nathan Skeen*

Company Official (Typed Name) Nathan Skeen

Company Official Title Designated Agent

Subscribed and sworn before me this 25th day of March, 20 14

Amy L Miller Notary Public

My commission expires 3-15-2022



RECEIVED

08/22/2014

Form WW-9

Operator's Well No. Hamilton 212

Mountaineer Keystone, LLC

Proposed Revegetation Treatment: Acres Disturbed 4.12 Prevegetation pH 6.5

Lime 2 Tons/acre or to correct to pH 7.0

Fertilizer type 10-20-20

Fertilizer amount 500 lbs/acre

Mulch hay or straw at 2 Tons/acre

Seed Mixtures

Temporary

Permanent

Seed Type lbs/acre

Seed Type lbs/acre

*See attached sheet

Attach:

Drawing(s) of road, location, pit and proposed area for land application (unless engineered plans including this info have been provided)

Photocopied section of involved 7.5' topographic sheet.

Plan Approved by: [Signature]

Comments: Seed & Mulch ASAP

Title: Oil & Gas Inspector

Date: 3/25/14

Field Reviewed? Yes No

RECEIVED
Office of Oil and Gas
APR 10 2014

WV Department of
Environmental Protection
08/22/2014

**Hamilton 212
Seed Mixtures**

Area I

Seed Type	lbs/acre
Annual Ryegrass	40
Spring Oats	96
Rye Grain	140
Annual Ryegrass	26
Spring Oats	64

Area II

Seed Type	lbs/acre
Tall Fescue	40
Ladino Clover	5
Tall Fescue	30
Birdsfoot Trefoil	10
Tall Fescue	30
Crownvetch	10
Orchardgrass	12
Birdsfoot Trefoil	10
Orchardgrass	12
Ladino	3
Kentucky Bluegrass	20
Redtop	5
White Clover	2
Kentucky Bluegrass	20
Redshirt	5
Birdsfoot Trefoil	10

Mountaineer Keystone



Site Specific
Safety and Environmental Plan
For

Hamilton 211-215

Preston County, WV

Date Prepared 3/19/2014

Mounatineer Keystone

John Shockey

WV Oil and Gas Inspector

Title

Oil & Gas Inspector

Title

Date



3/25/14

Date

RECEIVED
Office of Oil and Gas

APR 10 2014

08/22/2014
West Virginia Department of
Environmental Protection

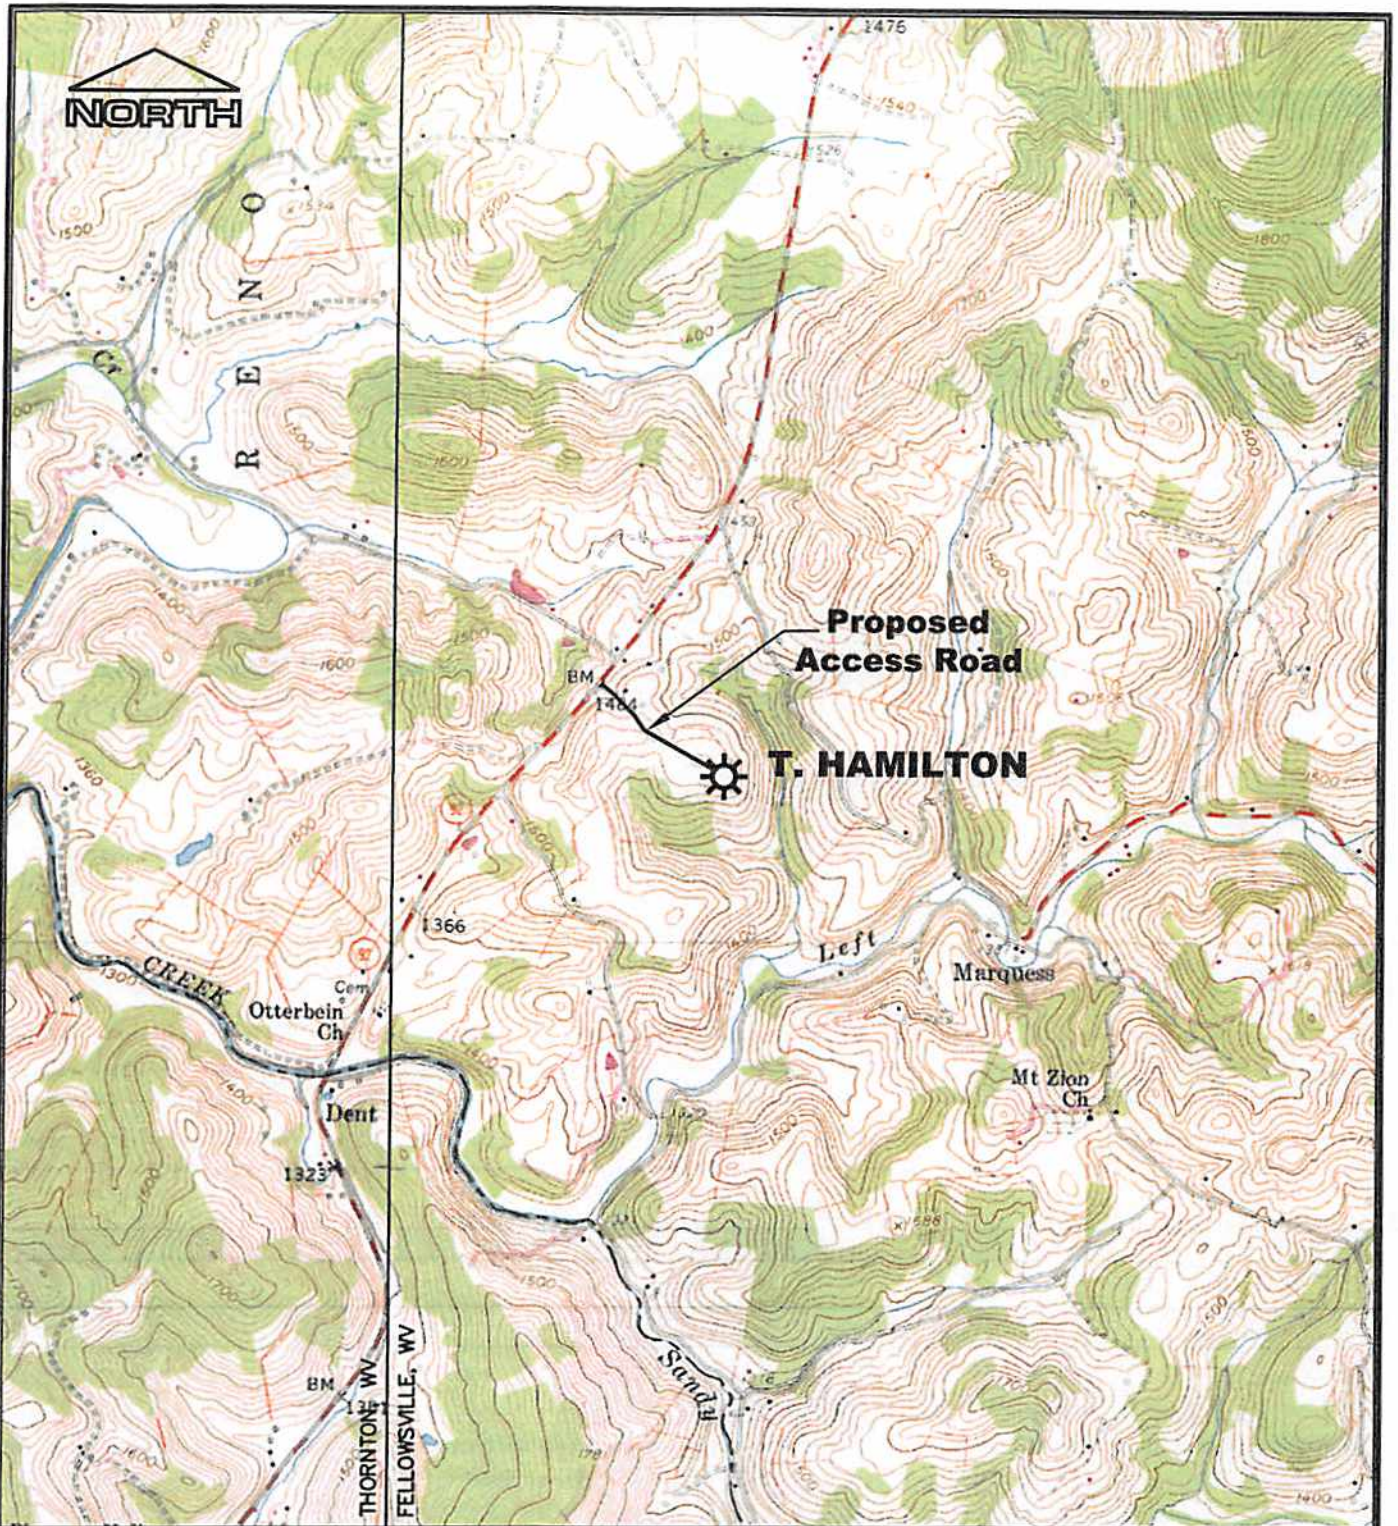

REFERENCE
 U.S.G.S TOPOGRAPHIC MAPS 7.5'
 FELLOWSVILLE, WV. 1958 (P.R. 1976)
 THORNTON, WV. 1958 (P.R. 1976)

MOUNTAINEER KEYSTONE, LLC

PROPOSED T. HAMILTON WELL LOCATION MAP

Drawn by	RLR	2/14
Engineer	DDT	2/14
Checked by	RVS	2/14
		Date


Scale: AS SHOWN

Prepared by *MSES consultants, inc.*

8,371'

LATITUDE 39°20'00"

LONGITUDE 79°50'00"


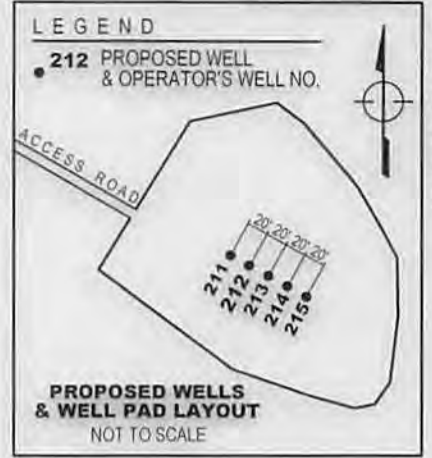


Hexagon	Tax Map / Parcel	Surface Owner
A	23 / 1	T. & B. HAMILTON
B	23 / 1.1	D. HAMILTON
C	22 / 13	HAMILTON FAMILY TRUST
D	15 / 23	HAMILTON FAMILY TRUST
E	15 / 22.1	J. & L. CLARKSON
F	15 / 21	J. & L. CLARKSON
G	15 / 20	J. & L. CLARKSON
H	15 / 12	R. AUSTIN KNOTTS
I	15 / 6	J. & L. CLARKSON

NOTE: No railroads are crossed by the proposed Hamilton 212 lateral.

LEGEND

- LEASE BOUNDARY
- SURFACE PROPERTY LINE
- 500' BUFFER AROUND LATERAL
- ☼ EXISTING WELL

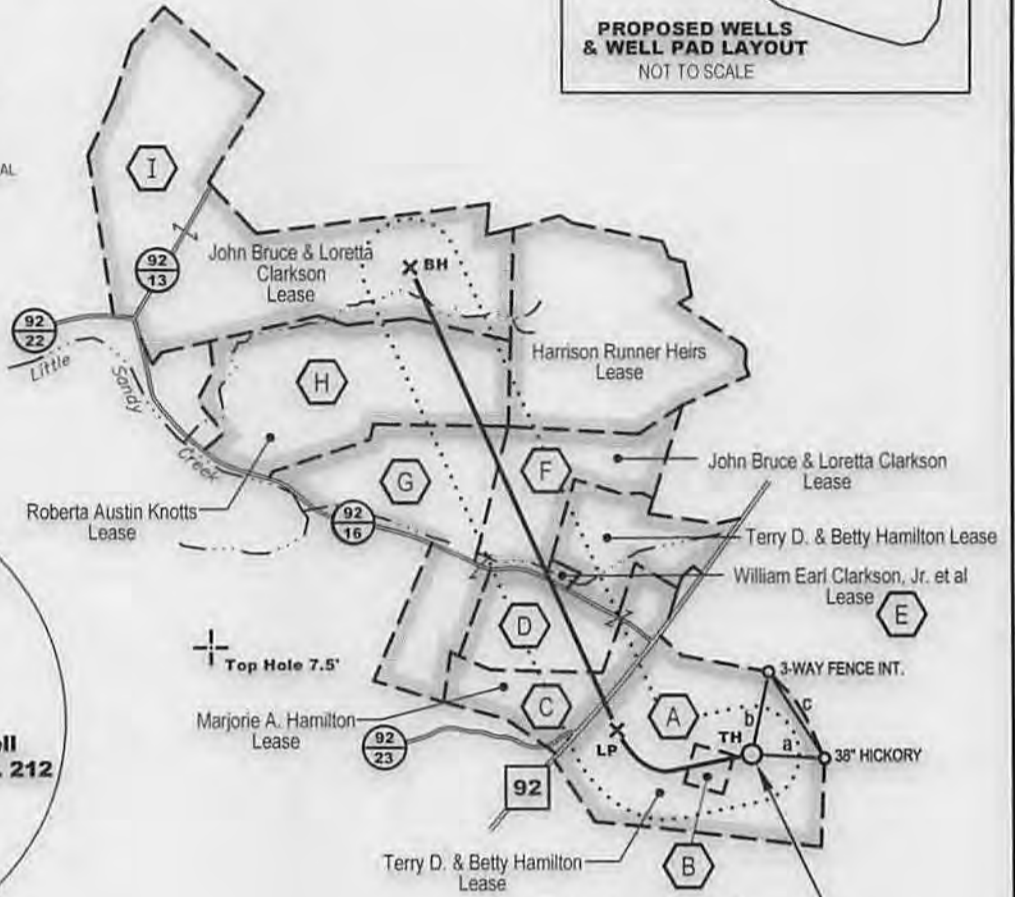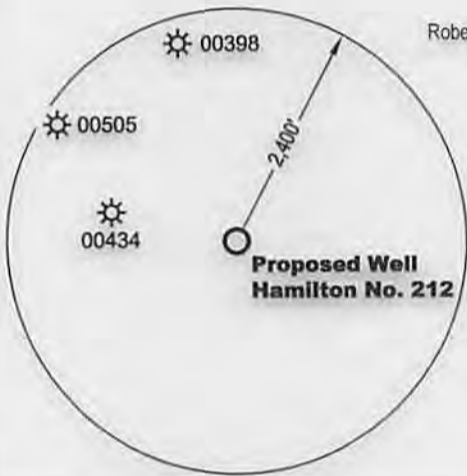

Proposed Well Hamilton No. 212
Elev. 1566.73'

WELL TIE LINES

- a - N86°41'00"W 761.80'
- b - S12°02'00"W 871.49'
- c - S32°51'03"E 1067.03'

Hamilton No. 212	UTM Zone 17 nad83 (meters)	Latitude / Longitude (WGS84)
Top Hole (TH)	N4351088.05 E598067 12	N39°18'13.06" E79°51'45.41"
Landing Point (LP)	N4351158.30 E597637.22	N39°18'15.52" E79°52'03.32"
Bottom Hole (BH)	N4352608.39 E596961.22	N39°19'02.82" E79°52'30.79"



MSES consultants, inc.
P. O. Drawer 190, Clarksburg, WV 26302-0190
(304) 624-9700

FILE NO. 13-284-Hamilton#212 Well Plat
SCALE 1" = 2000' DRAWN BY RLR
MIN. DEGREE OF ACCURACY 1 in 200
PROVEN SOURCE OF ELEVATION:
GPS (SURVEY GRADE)

I, the undersigned, hereby certify that this plat is correct to the best of my knowledge and belief and that it shows all information required by law and the rules issued and prescribed by the department of environmental protection.

(SIGNED) *[Signature]*
R.P.E. _____ P.S. 2029 _____

WVDEP
OFFICE OF OIL & GAS
601 57th STREET
CHARLESTON, WV 25304

DATE MARCH 7 20 14
OPERATOR'S WELL NO. HAMILTON NO. 212
47 077 00 616 H6A
STATE COUNTY PERMIT NO.
API WELL NO.



WELL TYPE : OIL GAS LIQUID INJECTION WASTE DISPOSAL
IF "GAS", PRODUCTION STORAGE DEEP SHALLOW

LOCATION : ELEVATION 1566.73' WATERSHED LITTLE SANDY CREEK
DISTRICT RENO COUNTY PRESTON QUADRANGLE FELLOWSVILLE, W V 7.5'
SURFACE OWNER TERRY D. & BETTY HAMILTON NEAREST TOWN DENT 08/22/2014
OIL & GAS ROYALTY OWNER T.&B. Hamilton, D.K. Hamilton, M.A. Hamilton, J.B.&L. Clarkson, R. Knotts, H.N. Clarkson, W.E. Clarkson Jr, P.M. Clarkson, B.J. Clarkson ACREAGE 95.06
LEASE ACREAGE 99.06

PROPOSED WORK : DRILL CONVERT DRILL DEEPER REDRILL FRACTURE OR STIMULATE
PLUG OFF OLD FORMATION PERFORATE NEW FORMATION CLEAN OUT AND REPLUG
OTHER PHYSICAL CHANGE IN WELL (SPECIFY) _____ PLUG AND ABANDON

TARGET FORMATION MARCELLUS ESTIMATED DEPTH TVD 8,044.5' MD 13,946.4'

WELL OPERATOR MOUNTAINEER KEYSTONE LLC DESIGNATED AGENT NATHAN SKEEN
ADDRESS 1111 VAN VOORHIS ROAD, SUITE G ADDRESS 1111 VAN VOORHIS ROAD, SUITE G
MORGANTOWN, WV 26505 MORGANTOWN, WV 26505

FORM WW-6

COUNTY PERMIT NO.

077