

NOTICE OF PROPOSED LOCATION OF OIL AND GAS WELL

(REQUIRED BY SECTION 2, CHAPTER 86, ACTS 1929)

WEST VIRGINIA DEPARTMENT OF MINES

OIL AND GAS SECTION

To THE DEPARTMENT OF MINES, Charleston, W. Va.

Wetzel Coal & Coke Company, COAL OPERATOR c/o Mr. W. W. Conoway, #211 Adams Street, Fairmont, W. Va. ADDRESS

PITTSBURGH & WEST VIRGINIA GAS COMPANY, NAME OF WELL OPERATOR #435 Sixth Avenue, Pittsburgh, Penna. COMPLETE ADDRESS

H. N. Carpenter Heirs, COAL OPERATOR c/o Mr. Frank Carpenter, #817 Coleman Street, Fairmont, W. Va. ADDRESS

June 9th, 19 30

PROPOSED LOCATION

Church District

Wetzel County

Well No. 5399

Louisa J. Carpenter (see letter) Farm A. H. Carpenter

GENTLEMEN:

The undersigned well operator is entitled to drill upon the above named farm or tract of land for oil and gas, having fee title thereto, (or as the case may be) under grant or lease dated January 16th, 1896, made by Louisa J. Carpenter and Robert Carpenter, to Delmar Oil Company, and recorded on the 13th day of April, 1896, in the office of the County Clerk for said County in

Book 48, page 336

The enclosed plat was prepared by a competent engineer and shows the proposed location of a well to be drilled for oil and gas by the undersigned well operator on the farm and in the Magisterial District and County above named, determined by survey and courses and distances from two permanent points, or land marks.

The undersigned well operator is informed and believes there are no coal operators operating beds of coal beneath said farm or tract of land on which said well is located, or within 500 feet of the boundaries of the same, who have mapped their workings and filed their maps as required by law, excepting the coal operators (if any) above named as addressees.

The above named coal operators (if any) are notified that any objections they may desire to make to such proposed location, or which they are required to make by Section 3 of said Act, if the drilling of a well at said proposed location will cause a dangerous condition in or about their respective coal mines, must be received by, or filed with the Department of Mines within ten* days from the receipt of a copy of this notice and accompanying plat by said Department. Said coal operators are further notified that forms for use in making such objections will be furnished to them by the Department of Mines promptly on request and that all such objections must set forth as definitely as is reasonably possible the ground or grounds on which such objections are based and indicate the direction and distance the proposed location should be moved to overcome same.


(The next paragraph is to be completed only in Department's copy.)

Copies of this notice and the enclosed plat were mailed by registered mail, or delivered to the above

named coal operators at their above shown respective address, or ~~at their above shown respective address~~ on the same day with the mailing or delivery of this copy to the Department of Mines at Charleston, West Virginia.

Very truly yours, PITTSBURGH & WEST VIRGINIA GAS COMPANY,

By [Signature] WELL OPERATOR Geologist.

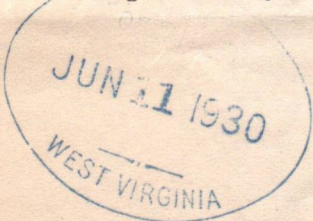

Address of Well Operator }

#435 Sixth Avenue, STREET

Pittsburgh, CITY OR TOWN

Pennsylvania, STATE

09/29/2023

*Section 3 If no such objections be filed, or be found by the department of mines, within said period of ten day from the receipt of said notice and plat by the department of mines, to said proposed location, the department shall forthwith issue to the well operator a drilling permit reciting the filing of such plat, that no objections have been made by the coal operators to the location, or found thereto by the department, and that the same is approved and the well operator authorized to proceed to drill at said location.

net 29

NOTICE OF PROPOSED LOCATION OF OIL AND GAS WELL
WEST VIRGINIA DEPARTMENT OF MINES
OIL AND GAS SECTION

To the Department of Mines
Charleston, W. Va.

FITZGERALD & SONS, VIRGINIA GAS COMPANY
LAND OR WELL OPERATOR

1455 SIXTH AVENUE, PITTSBURGH, PENNS.
ADDRESS

Robert J. Carpenter
COAL OPERATOR

1455 SIXTH AVENUE, PITTSBURGH, PENNS.
ADDRESS

Proposed Location
Twp 31 N, R 10 E, S 23

County
Wayne

State
West Virginia

Proposed Location
Twp 31 N, R 10 E, S 23

County
Wayne

State
West Virginia


Well No. 2323
Operator
Robert J. Carpenter

The undersigned well operator is entitled to drill upon the above named land or tract of land for oil and gas having no title thereto (or as the case may be, under grant or lease dated January 10th, 1938 made by Robert Carpenter and DeLair Oil Company and recorded on the 18th day of April, 1938 in the office of the County Clerk for said County in

The undersigned well operator is entitled to drill upon the above named land or tract of land for oil and gas having no title thereto (or as the case may be, under grant or lease dated January 10th, 1938 made by Robert Carpenter and DeLair Oil Company and recorded on the 18th day of April, 1938 in the office of the County Clerk for said County in

The undersigned well operator is entitled to drill upon the above named land or tract of land for oil and gas having no title thereto (or as the case may be, under grant or lease dated January 10th, 1938 made by Robert Carpenter and DeLair Oil Company and recorded on the 18th day of April, 1938 in the office of the County Clerk for said County in

Very truly yours,
Fitzgerald & Sons, Virginia Gas Company
Well Operator
1455 Sixth Avenue
Pittsburgh
City or Town
State



09/29/2023

Section 3. If no such objections be filed or be found by the department of mines within said period of ten days from the receipt of such notice and plan by the department of mines, the proposed location of the well shall nevertheless be deemed to have been approved by the department of mines and the well operator authorized to proceed to drill at said location.

APPLICATION TO DRILL DEEPER

FORM G-1

NOTICE OF PROPOSED LOCATION OF OIL AND GAS WELL
(REQUIRED BY SECTION 2, CHAPTER 86, ACTS 1929)
WEST VIRGINIA DEPARTMENT OF MINES
OIL AND GAS SECTION

To THE DEPARTMENT OF MINES,
Charleston, W. Va.

Wetzel Coal & Coke Company.

COAL OPERATOR OR COAL OWNER
c/o A. A. Thompson
Uniontown, Penna.,

ADDRESS

COAL OPERATOR OR COAL OWNER

ADDRESS

COAL OPERATOR OR COAL OWNER

ADDRESS

PITTSBURGH & WEST VA GAS COMPANY.

NAME OF WELL OPERATOR

CLARKSBURG, WEST VA.

COMPLETE ADDRESS

October 28th, 1935 193.....

PROPOSED LOCATION

Church.....

District

Wetzel.....

County

5399

Well No.

Louisa J. Carpenter.....

Farm

GENTLEMEN :

The undersigned well operator is entitled to drill upon the above named farm or tract of land for oil and gas, having fee title thereto, (or as the case may be) under grant or lease dated **January 16th 1896**, made by **Louisa J. Carpenter, et al**, to **Delmar Oil Company.**, and recorded on the **13th** day of **April 1896**, in the office of the County Clerk for said County in

Book **48**, page **336**

The enclosed plat was prepared by a competent engineer and shows the proposed location of a well to be drilled for oil and gas by the undersigned well operator on the farm and in the Magisterial District and County above named, determined by survey and courses and distances from two permanent points, or land marks.

The undersigned well operator is informed and believes there are no coal operators operating beds of coal beneath said farm or tract of land on which said well is located, or within 500 feet of the boundaries of the same, who have mapped their workings and filed their maps as required by law, excepting the coal operators or coal owners (if any) above named as addressees.

The above named coal operators or coal owners (if any) are notified that any objections they may desire to make to such proposed location, or which they are required to make by Section 3 of said Act, if the drilling of a well at said proposed location will cause a dangerous condition in or about their respective coal mines, must be received by, or filed with the Department of Mines within ten* days from the receipt of a copy of this notice and accompanying plat by said Department. Said coal operators are further notified that forms for use in making such objections will be furnished to them by the Department of Mines promptly on request and that all such objections must set forth as definitely as is reasonably possible the ground or grounds on which such objections are based and indicate the direction and distance the proposed location should be moved to overcome same.

(The next paragraph is to be completed only in Department's copy.)

Copies of this notice and the enclosed plat were mailed by registered mail, or delivered to the above named coal operators or coal owners at their above shown respective address.....day.... before, or on the same day with the mailing or delivery of this copy to the Department of Mines at Charleston, West Virginia.

Very truly yours,

PITTSBURGH & WEST VA GAS COMPANY.

By, **F. E. Brigden,**

WELL OPERATOR

608 Union Natl. Bank Bldg.

STREET


Clarksburg,

CITY OR TOWN

West Va.

STATE

09/29/2023



Address of Well Operator }

*Section 3 If no such objections be filed, or be found by the department of mines, within said period of ten days from the receipt of said notice and plat by the department of mines, to said proposed location, the department shall forthwith issue to the well operator a drilling permit reciting the filing of such plat, that no objections have been made by the coal operators to the location, or found thereto by the department, and that the same is approved and the well operator authorized to proceed to drill at said location.

NOTICE OF PROPOSED LOCATION OR OIL AND GAS WELL
WEST VIRGINIA DEPARTMENT OF MINES
OIL AND GAS SECTION

To The Department of Mines
Charleston, W. Va.

Wetzel Coal & Coke Company.

PITTSBURGH & WEST VA GAS COMPANY.

C/O A. A. Thompson
Uniontown, Penna.

CLARKSBURG, WEST VA.

October 23rd, 1935

PROPOSED LOCATION

Church

District

Wetzel

County

3399

Well No.

Louise J. Carpenter

Person

The undersigned well operator is entitled to drill upon the above named farm or tract of land for oil and gas having fee title thereto. (or as the case may be) under grant or lease dated January 1934

1935 made by Louise J. Carpenter, et al to

Defeat Oil Company. and recorded on the 1934 day

of April 1935 in the office of the County Clerk for said County in

48 333

The enclosed plat was prepared by a competent engineer and shows the proposed location of a well to be drilled for oil and gas by the undersigned well operator on the farm and in the Mineral District and County above named, delineated by survey and corners and distances from two permanent points on land marks.

The undersigned well operator is informed and believes there are no coal operators operating beds of coal beneath said farm or tract of land on which said well is located, or within 500 feet of the bound-aries of the same, who have mapped their workings and filed their maps as required by law, excepting the coal operators or coal owners (if any) above named as addressees.

The above named coal operators or coal owners (if any) are notified that any objections they may desire to make to such proposed location or which they are required to make by Section 7 of said Act, if the drilling of a well at said proposed location will cause a dangerous condition in or about their respective coal mines must be received by or filed with the Department of Mines within ten days from the receipt of a copy of this notice and accompanying plat by said Department. Said coal operators are further notified that forms for use in making such objections will be furnished to them by the Department of Mines promptly on request and that all such objections must set forth as definitely as is reasonably possible the grounds or grounds on which such objections are based and indicate the location and distance the proposed location should be moved to overcome same.


(The next paragraph is to be completed only in Department's copy.)

Copies of this notice and the enclosed plat were mailed by registered mail, or delivered to the above named coal operators or coal owners at their above shown respective address on the same day with the mailing or delivery of this copy to the Department of Mines at Charleston, West Virginia.

Very Respectfully,
PITTSBURGH & WEST VA GAS COMPANY.

By: F. E. BRIDGES
602 Union Natl. Bank Bldg.
Clarksburg,
West Va.

Well Operator
of
Address

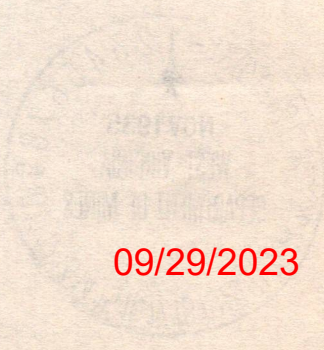

09/29/2023

Section 7. If no such objections be filed or be found by the department of mines within said period of ten days from the receipt of said notice and plat by the department of mines, the proposed location of the well shall forthwith issue to the well operator a drilling permit, and the drilling of such well, but no objections have been made by the coal operators to the location of such well, by the department, and that the same is approved and the well operator authorized to proceed to drill at said location.

A-10

DEPARTMENT OF MINES

ROBT. M. LAMBIE
CHIEF



J. L. HEIZER
CHIEF CLERK

CHARLESTON June 11, 1930

Mr. H. N. Carpenter
c/o Mr. Frank Carpenter
817 Coleman Street
Fairmont, W. Va.

Gentlemen:

A notice of a proposed location of an oil or gas well, No. 5399 A. H. Carpenter Farm, Church District, Wetzel County, has been received by this Department from the Pittsburgh & W. Va. Gas Company, of Pittsburgh, Pa. West Virginia, as of this date. A copy of this notice with an attached map should have been mailed you by the Well Operator.

Whether or not it is your intention of filing objections to this Department regarding the proposed location, it will be necessary for you to submit to the Department of Mines on or before June 21, 1930 a section of your mine map (preferably of 200-500 feet scale) showing this proposed location in relation to your present mine workings or projected developments if the workings or projected developments are within 1000 feet of the proposed locations.

If from the location of the above proposed well, it is apparent that the well will penetrate unworkable coal seams, barren areas, or does not fall within the scope of your present projected developments, advise this Department to that effect in lieu of the above mentioned map.

ok


Yours very truly,

R. M. Lambie

Chief of Department of Mines.

RML:G

There is no mine workings on this lease and none near it, and none projected that I know of.

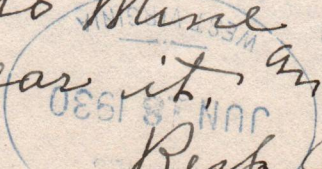

Resp Yours

A. Frank Carpenter

09/29/2023

DEPARTMENT OF MINES

A. L. MEIER
CHIEF CLERK

ROBT. M. LAMBIE
CHIEF



CHARLESTON
JUNE 11, 1930

Mr. W. H. Carpenter
c/o Mr. Frank Carpenter
117 Columbia Street
Fairmont, W. Va.

Sir:

A review of a general location of an oil or gas
well, No. 5200, at Fairmont, West Virginia, was
made by the Department of Mines, West Virginia,
in 1929. The location is shown on the map
attached hereto. It is suggested that you
contact the Department of Mines, West Virginia,
for a copy of this report.

Very truly yours,
Robert M. Lambie
Chief
The Department of Mines
Charleston, West Virginia

cc - Mr. Lambie
cc - Mr. Meier
cc - Mr. [unclear]

[Handwritten signature]

[Large handwritten note at the bottom of the page, partially obscured by a circular stamp]

09/29/2023

A-11.

June 21, 1930

Pittsburgh & West Virginia Gas Co.,
435 Sixth Avenue
Pittsburgh, Pa.

Gentlemen:

Your notice of proposed well location
No. 5399 on the A. H. Carpenter Farm
was received in this office June 11, 1930

No objections have been filed on the ten-
day period subsequent to our receipt of your
notice. Drilling permit is hereby issued and found
enclosed.

Yours very truly,

Chief of Department of Mines.

RML:g
encl:

09/29/2023



Very truly yours,
[Illegible signature]

Respectfully,
[Illegible name]

Your letter of the 14th inst. was received in this office on the 15th inst. and is being forwarded to the proper authorities for their consideration.

No objection has been filed on the part of the Bureau of Land Management in connection with the proposed action.

Very truly yours,
[Illegible signature]

Chief of Department of Mines

[Illegible text]

A-12

Pittsburgh and West Virginia Gas Company

435 Sixth Avenue

Pittsburgh, Pa.

July the Eighth,
1930.

Net 29

Mr. Robt. M. Lambie, Chief,
West Virginia Department of Mines,
Charleston, W. Va.


Dear Sir:-

Under date June 21st, 1930, we received a permit from your Department for the drilling of our Well No. 5399 on the A. H. Carpenter 24 acre tract of land situate in Church District, Wetzel County, W. Va.


We have recently discovered that this tract is better known as the "Louisa J. Carpenter" farm instead of the A. H. Carpenter farm, as reported, and now write you in order that you may make this correction in your record of this well.

Trusting that this will make no material difference in the filing of our application for permit for the drilling of this well, I am,

Very truly yours,



J. H. Newlon
GEOLOGIST.

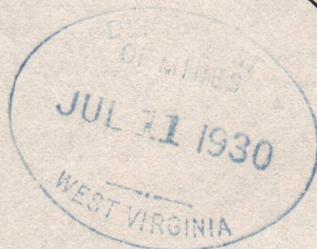

JEC

09/29/2023

Wells and Wells
1900



Dear Sir:-

Under date June 21st, 1900, we received a permit from
your department for the drilling of our well No. 2000 on the A. B.
C. property at some point of land situated in Carbon County, Montana
County, N. M.

We have recently discovered that said land is better
known as the "Lester J. Carpenter" tract located in the A. B. Carpenter
town, as reported, and now wish you to amend said permit and issue the
correction to your record of this well.

Trusting that this will make no material difference in the
issue of our application for permit for the drilling of this well.

Very truly yours,

Lester J. Carpenter
Carpenter

WEST VIRGINIA DEPARTMENT OF MINES
Oil and Gas Section
PRELIMINARY DATA SHEET NO. 1

File No. Well No. 5399

PITTSBURGH & WEST VA GAS CO. Company, of CLARKSBURG,

WEST VIRGINIA on ththe Louisa J. Carpenter Farm

containing 24 acres. Location

Church District, in Wetzel County, West Virginia.

The surface of the above tract is owned in fee by Nancy A. Yost

of Glover Gap, West Va. address, and the mineral rights are owned by

A. F. Carpenter, Atty-in-Fact. of 817 Coleman Ave.,
Fairmont, West Va.

The oil and gas privileges are held under lease by the above named company, and this well is drilled under permit No. issued by the West Virginia Department of Mines, Oil and Gas Section, June 21st, 1930. 19.....

Elevation of surface at top of well, 1427' Spirit ~~Barometric~~

The number of feet of the different sized casings used in the well.

..... 16 feet..... 13" size. Wood conductor.

..... 215 feet..... 10 size, csg. 1600 feet..... 8-1/4" sized csg.

..... 2335 feet..... 6-5/8" size, csg. feet..... sized csg.

..... feet..... size, csg. feet..... sized csg.

..... packer of..... size, set at.....

..... packer of..... size, set at.....

..... in casing perforated at..... feet to..... feet.

..... in casing perforated at..... feet to..... feet.

Coal was encountered at 760-763 feet; thickness..... 36 inches, and at 1000-1005

feet; thickness..... 60 inches; and at 1110-1118 feet; thickness..... 96 inches.

Liners were used as follows: (Give details).....

September 25th, 1930

Date.

Approved PITTSBURGH & WEST VA GAS CO. 09/29/2023, Owner.

By [Signature] (Title) Superintendent.

SEP 26 1930

816
2773

WEST VIRGINIA DEPARTMENT OF MINES

Oil and Gas Section

PRELIMINARY DATA SHEET NO. 1

Well No. 3333

File No.

GLASSBORO

PITTSBURGH & WEST VA GAS CO. Company of

WEST VIRGINIA on this Lewis J. Carpenter Farm

containing 24 acres Location

County West Virginia District in West

The surface of the above tract is owned in fee by Wm. A. Yost

of Glover Gap, West Va. address and the mineral rights are owned by

A. F. Carpenter, Atty-in-Fact. 317 Colman Ave., Fairmont, West Va.

The oil and gas privileges are held under lease by the above named company, and this well is drilled under

permit No. issued by the West Virginia Department of Mines, Oil and Gas Section

June 21st, 1930.

19

Elevation of casing at top of well 1427.

The number of feet of the different sized casings used in the well

18 feet 1 3/4" Wood conductor.

10 feet 2 1/2" six esp. 1000 feet 3-1/4" six esp.

2333 feet 6-5/8" six esp. six esp.

feet six esp. six esp.

packer of size set at

packer of size set at

in casing perforated at feet to

in casing perforated at feet to

Tool was encountered at 780-783 feet; thickness 36 inches and at 1000-1003

feet; thickness 80 inches, and at 1110-1118 feet; thickness 98 inches

Latens were used as follows: (Give details)

September 25th, 1930

Date

Approved by PITTSBURGH & WEST VA GAS CO. Owner

09/29/1930

By

(Title) Superintendent

SEP 29 1930

B-2

PITTSBURGH & WEST VA GAS CO. Company

COMPLETION DATA SHEET

CLARKSBURG, WEST VA. Address

NO. 2

Well No. 5399, Louisa J. Carpenter farm.

FORMATION RECORD

Church Dist., Wetzel Co., W.Va.

Name	Color	Character	Oil, Gas or Water	Top	Bottom	Thickness	Total Depth	Remarks
Soil	Dark	Soft		0	2	2	2	
Clay	Red	"		0	80	78	80	
Sand	Light	Hard		80	110	30	110	
Clay	Dark	Soft		110	200	90	200	
Red Rock	Red	"		200	240	40	240	
Lime	White	Hard		240	270	30	270	
Slate	Dark	Soft		270	390	120	390	
Red Rock	Red	"		390	435	45	435	
Lime	Light	Hard		435	480	45	480	
Slate	Dark	Soft		480	505	25	505	
Sand	Light	Hard		505	550	45	550	
Red Rock	Red	Soft		550	556	6	556	
Lime	White	Hard		556	590	34	590	
Slate	Dark	Soft		590	670	80	670	
Lime	Light	Hard		670	690	20	690	
Slate	Dark	Soft		690	710	20	710	
Lime	White	Hard		710	740	30	740	
Slate	Dark	Soft		740	750	10	750	
Lime	White	Hard		750	760	10	760	
Coal	Black	Soft		760	763	3	763	(Fairview)
Slate	Dark	"		763	775	12	775	
Lime	White	Hard		775	820	45	820	
Slate	Dark	Soft		820	840	20	840	
Lime	Light	Hard		840	1000	160	1000	
Coal	Black	Soft		1000	1005	5	1005	(Mapletown)
Slate	Dark	Soft		1005	1010	5	1010	
Lime	White	Hard		1010	1050	40	1050	
Slate	Dark	Soft		1050	1070	20	1070	
Lime	White	Hard		1070	1100	30	1100	
Slate	Dark	Soft		1100	1110	10	1110	
Coal	Black	"		1110	1118	8	1118	(Pittsburgh)
Lime	Light	Hard		1118	1140	22	1140	
Slate	Dark	Soft		1140	1160	20	1160	
Lime	Light	Hard		1160	1200	40	1200	
Slate	Dark	Soft		1200	1210	10	1210	
Sand	Light	Hard		1210	1230	20	1230	
Slate	Dark	Soft		1230	1240	10	1240	
Sand	Light	Hard		1240	1270	30	1270	
Red Rock	Red	Soft		1270	1285	15	1285	
Sand	White	Hard		1285	1298	13	1298	
Slate-Red Rock	Red	Soft		1298	1315	17	1315	
Sand	White	Hard		1315	1335	20	1335	
Red Rock	Red	Soft		1335	1360	25	1360	
Slate	Dark	Soft		1360	1410	50	1410	
Lime	White	Hard		1410	1440	30	1440	
Slate	Dark	Soft		1440	1490	50	1490	

COMPLETION DATA SHEET

NO. 2

FORMATION RECORD

PITTSBURGH & WEST VA GAS CO Company

CLARKSBURG, WEST VA. Address

Well No. 5299, Louis J. Carpenter Farm

Church Dist., Wetzel Co., W. Va.

Name	Color	Character	Oil Gas or Water	Top	Bottom	Thickness	Total Depth	Remarks
Slate	Dark	Soft		1440	1440	30	1440	
Time	White	Hard		1410	1440	30	1440	
Slate	Dark	Soft		1380	1410	30	1440	
Red Rock	Red	Soft		1350	1380	30	1440	
Sand	White	Hard		1325	1350	25	1440	
Slate-Red Rock	Red	Soft		1315	1325	10	1440	
Sand	White	Hard		1298	1315	17	1440	
Red Rock	Red	Soft		1285	1298	13	1440	
Sand	Light	Hard		1270	1285	15	1440	
Slate	Dark	Soft		1240	1270	30	1440	
Sand	Light	Hard		1230	1240	10	1440	
Slate	Dark	Soft		1210	1230	20	1440	
Time	Light	Hard		1200	1210	10	1440	
Slate	Dark	Soft		1180	1200	20	1440	
Time	Light	Hard		1140	1180	40	1440	
Coal	Black	"		1118	1140	22	1440	
Slate	Dark	Soft		1110	1118	8	1440	
Time	White	Hard		1070	1110	40	1440	
Slate	Dark	Soft		1050	1070	20	1440	
Time	White	Hard		1010	1050	40	1440	
Coal	Black	Soft		1005	1010	5	1440	
Time	Light	Hard		840	1005	160	1440	(Mepletown)
Slate	Dark	Soft		820	840	20	1440	
Time	White	Hard		775	820	45	1440	
Slate	Dark	"		763	775	12	1440	
Coal	Black	Soft		750	763	13	1440	
Time	White	Hard		730	750	20	1440	
Slate	Dark	Soft		710	730	20	1440	
Time	White	Hard		670	710	40	1440	
Slate	Dark	Soft		650	670	20	1440	
Time	White	Hard		558	650	92	1440	
Red Rock	Red	Soft		550	558	8	1440	
Sand	Light	Hard		505	550	45	1440	
Slate	Dark	Soft		480	505	25	1440	
Time	Light	Hard		435	480	45	1440	
Red Rock	Red	"		390	435	45	1440	
Slate	Dark	Soft		370	390	20	1440	
Time	White	Hard		270	370	100	1440	
Slate	Dark	Soft		240	270	30	1440	
Red Rock	Red	"		200	240	40	1440	
Clay	Dark	Soft		110	200	90	1440	
Sand	Light	Hard		80	110	30	1440	
Clay	Red	"		0	80	80	1440	

Cont'd to Sheet 2

09/29/2023

B-3

PITTSBURGH & WEST VA GAS CO. Company

COMPLETION DATA SHEET
NO. 2
FORMATION RECORD

CLARKSBURG, WEST VA. Address

Well No. 5399, Louisa J. Carpenter farm.

Church Dist., Wetzel Co., W.Va.

Name	Color	Character	Oil, Gas or Water	Top	Bottom	Thickness	Total Depth	Remarks
L. Dunkard	Light	Hard	Gas 1602	1490	1545	55	1545	
Slate	Dark	Soft		1545	1590	45	1590	
Big Dunkard	Light	Hard		1590	1651	61	1651	
Slate	Black	Soft		1651	1690	39	1690	
Lime	Light	Hard		1690	1730	40	1730	
Slate	Dark	Soft		1730	1750	20	1750	
Lime	White	Hard		1750	1775	25	1775	
Slate	Dark	Soft		1775	1890	115	1890	
1st. Salt	White	Hard		1890	1918	28	1918	
Slate	Dark	Soft		1918	1930	12	1930	
2nd. Salt	Light	Hard		1930	1970	40	1970	
Slate	Dark	Soft		1970	2070	100	2070	
Sand	White	Hard		2070	2130	60	2130	
Slate	Dark	Soft		2130	2170	40	2170	
Lime	White	Hard		2170	2225	55	2225	
Red Rock	Red	Soft		2225	2235	10	2235	
Lime	White	Hard		2235	2250	15	2250	
Slate	Dark	Soft		2250	2265	15	2265	
Little Lime	White	Hard		2265	2275	10	2275	
Slate	Dark	Soft		2275	2295	20	2295	
Big Lime	White	Hard	2295	2385	90	2385		
Big Injun	Light	Hard	Gas 2455- " 2461	2385				
T O T A L D E P T H							2469	


Well was not shot at ~~shot~~ feet; well was shot at _____ feet.

Salt Fresh water at _____ feet; salt fresh water at _____ feet.

Well was producing ~~xxxx~~ 6-5/8" hole.

PITTSBURGH & WEST VA GAS COMPANY.

September 25th, 1930. Approved _____
Date

 09/29/2023
Owner Superintendent.

NOTE: All bottom formations must be noted as indicated above and all key-rocks and oil and gas sands must be recorded under their proper geological names in the district as well as any local names commonly used in the district for such strata.

COMPLETION DATA SHEET
NO. 2
FORMATION RECORD

PITTSBURGH & WEST VA GAS CO.
Company
CLARKSBURG, WEST VA.
Address
Well No. 5399, Lewis J. Carpenter farm.
Church Dist., Wetzel Co., W. Va.

Name	Color	Character	Oil, Gas or Water	Top	Bottom	Thickness	Total Depth	Remarks
Big Intan	Light	Hard		2385	2385			
Big Intan	White	Hard		2385	2385			
Big Intan	Dark	Soft		2375	2385	10	2385	
Little Limestone	White	Hard		2365	2375	10	2375	
Little Limestone	Dark	Soft		2350	2365	15	2350	
Limestone	White	Hard		2335	2350	15	2335	
Limestone	Red	Soft		2325	2335	10	2325	
Limestone	White	Hard		2310	2325	15	2310	
Sand	Dark	Soft		2170	2310	140	2170	
Sand	White	Hard		2070	2170	100	2070	
Sand	Dark	Soft		1970	2070	100	1970	
Sand	Dark	Soft		1918	1970	52	1918	
Sand	White	Hard		1890	1918	28	1890	
Sand	Dark	Soft		1775	1890	115	1775	
Sand	White	Hard		1750	1775	25	1750	
Sand	Dark	Soft		1730	1750	20	1730	
Sand	Light	Hard		1690	1730	40	1690	
Sand	Black	Soft		1681	1690	9	1681	
Sand	Light	Hard	Gas 1602	1590	1681	91	1590	
Sand	Dark	Soft		1545	1590	45	1545	
Sand	Light	Hard		1490	1545	55	1490	

TOTAL DEPTH

2469

Gas 2455-
" 2461

Well was not shot at _____ feet; well was shut at _____ feet.
Fresh water at _____ feet; fresh water at _____ feet.
Salt _____ feet.

PITTSBURGH & WEST VA GAS COMPANY.

Well was 6-5/8" hole producing

09/29/2023

Owner: Superintendent Approved: _____ Date: September 25th, 1930.

NOTE: All bottom formations must be noted as indicated above and all key rocks and oil and gas sands must be recorded under their proper geological names in the district as well as any local names commonly used in the district for such strata.

WELL DRILLED DEEPER

WEST VIRGINIA DEPARTMENT OF MINES

OIL AND GAS DIVISION

PRELIMINARY DATA SHEET NO. 1

File No. _____

Well No. 5399

PITTSBURGH & WEST VA GAS

CLARKSBURG,

Company of _____

WEST VA.

on the _____

Louisa J. Carpenter

Farm _____

containing 24

acres. Location _____

Map Ref., Mann. S/W. 1-1

Church

District, in _____

Wetzel

County, West Virginia _____

The surface of the above tract is owned in fee by _____

Nancy A. Youst

of _____

R.F.D.#. Glover Gap, W.Va.

address, and the mineral rights are owned by _____

A.F. Carpenter, Atty-In-Fact

817 Coleman Avenue,
Fairmont, West Va.

of _____

The oil and gas privileges are held under lease by the above named company, and this well is drilled under permit

No. _____

"Not Given" Wet-104

issued by the West Virginia Department of Mines, Oil and Gas Division

November 12th, 1935

193_____

Elevation of surface at top of well, 1427'

Spirit ~~Barometer~~

The number of feet of the different sized casings used in the well.

16

feet

13"

size. Wood conductor.

215

feet

10"

size, csg.

1600

feet

8-1/4"

sized csg.

2335

feet

6-5/8"

size, csg.

feet

sized csg.

feet

size, csg.

feet

sized csg.

packer of _____

size, set at _____

packer of _____

size, set at _____

_____, in casing perforated at _____

feet to _____

feet.

_____, in casing perforated at _____

feet to _____

feet.

Coal was encountered at 760-763

feet, thickness _____

36

inches, and at _____

1000-1005

feet; thickness 60

inches; and at _____

1110-1118

feet; thickness _____

96

inches.

Liners were used as follows: (Give details) _____

_____, December 30th, 1935.

Began Drg. Deeper 11-14-1935
Comp. Drg. Deeper 12-24-1935.

Date.

PITTSBURGH & WEST VA GAS 09/29/2023

Approved _____

Owner.

By _____

F. E. Bridgen

(TITLE)



5889

CLARKSBURG,

HITTSBURGH & WEST VA GAS

Louis J. Carpenter

WEST VA.

Map Ref., Main. S/W. 1-1

54

Wetzel

Church

Nancy A. Young

E. B. D. Glover Gap, W. Va.

B. V. Coleman Avenue,
Fairmont, West Va.

A. T. Carpenter, Mt. In-Act

"Not Given"

November 12th, 1935

1937

S-1/A"

1000

50"

215

4-6/8"

355

1000-1005

35

760-765

36

1110-1115

60

December 30th, 1935.

HITTSBURGH & WEST VA GAS

Deepen 11-14-1935
Deepen 13-24-1935

09/29/2023

T. S. Bridges



Wet-104

Gas

OIL OR GAS WELL

PITTSBURGH & WEST VA GAS
CLARKSBURG, WEST VA.

COMPLETION DATA SHEET
No. 2

WELL No. 5399 FARM Louisa J. Carpenter

FORMATION RECORD

Name	Color	Character	Oil, Gas or Water	Top	Bottom	Thickness	Total Depth	Remarks
Soil	Dark	Soft		0	2	2	2	
Clay	Red	"		2	80	78	80	
Sand	Light	Hard		80	110	30	110	
Clay	Dark	Soft		110	200	90	200	
Red Rock	Red	"		200	240	40	240	215" 10"
Lime	White	Hard		240	270	30	270	
Slate	Dark	Soft		270	390	120	390	
Red Rock	Red	"		390	435	45	435	
Lime	Light	Hard		435	480	45	480	
Slate	Dark	Soft		480	505	25	505	
Sand	Light	Hard		505	550	45	550	
Red Rock	Red	Soft		550	556	6	556	
Lime	White	Hard		556	590	34	590	
Slate	Dark	Soft		590	670	80	670	
Lime	Light	Hard		670	690	20	690	
Slate	Dark	Soft		690	710	20	710	
Lime	White	Hard		710	740	30	740	
Slate	Dark	Soft		740	750	10	750	
Lime	White	Hard		750	760	10	760	
Fairview Coal	Black	Soft		760	763	3	763	
Slate	Dark	"		763	775	12	775	
Lime	White	Hard		775	820	45	820	
Slate	Dark	Soft		820	840	20	840	
Lime	Light	Hard		840	1000	160	1000	
M.T. Coal	Black	Soft		1000	1005	5	1005	
Slate	Dark	"		1005	1010	5	1010	
Lime	White	Hard		1010	1050	40	1050	
Slate	Dark	Soft		1050	1070	20	1070	
Lime	White	Hard		1070	1100	30	1100	
Slate	Dark	Soft		1100	1110	10	1110	
Pgh. Coal	Black	"		1110	1118	8	1118	
Lime	Light	Hard		1118	1140	22	1140	
Slate	Dark	Soft		1140	1160	20	1160	
Lime	Light	Hard		1160	1200	40	1200	
Slate	Dark	Soft		1200	1210	10	1210	
Sand	Light	Hard		1210	1230	20	1230	
Slate	Dark	Soft		1230	1240	10	1240	
Sand	Light	Hard		1240	1270	30	1270	
Red Rock	Red	Soft		1270	1285	15	1285	
Sand	White	Hard		1285	1298	13	1298	
Slate-Red Rock	Red	Soft		1298	1315	17	1315	
Sand	White	Hard		1315	1335	20	1335	
Red Rock	Red	Soft		1335	1360	25	1360	
Slate	Dark	"		1360	1410	50	1410	

Cont'd to sheet #2

shot
Well was not shot atfeet; well was shot atfeet.

Salt
Fresh water atfeet; fresh water atfeet.

producing
Well was 6-5/8" hole.


PITTSBURGH & WEST VA GAS COMPANY.

December 31st, 1935.
Date

Approved..... By, F. E. Bridgen
Owner

09/29/2023

NOTE: All bottom formations must be noted as indicated above and all key-rocks and oil and gas sands must be recorded under their proper geological names in the district as well as any local names commonly used in the district for such strata.



Interval	Thickness	Bottom	Top	Oil or Gas	Water	Character	Color	Remarks
1380	10	1390	1380			Soft	Red	Red Rock
1380	25	1355	1380			Hard	White	Sand
1380	20	1400	1380			Soft	Red	Red Rock
1385	13	1398	1385			Soft	Red	Red Rock
1385	13	1372	1385			Hard	White	Sand
1385	13	1360	1385			Soft	Red	Red Rock
1370	15	1385	1370			Hard	Light	Sand
1370	15	1355	1370			Hard	Light	Sand
1370	50	1320	1370			Soft	Dark	Slate
1370	50	1270	1370			Soft	Dark	Slate
1370	10	1280	1370			Hard	Light	Sand
1370	40	1240	1370			Soft	Dark	Slate
1370	30	1210	1370			Hard	Light	Sand
1370	30	1180	1370			Hard	Light	Sand
1370	30	1150	1370			Soft	Dark	Slate
1370	30	1120	1370			Soft	Dark	Slate
1370	30	1090	1370			Hard	White	Sand
1370	30	1060	1370			Soft	Dark	Slate
1370	30	1030	1370			Soft	Dark	Slate
1370	30	1000	1370			Hard	Light	Sand
1370	30	970	1370			Soft	Dark	Slate
1370	30	940	1370			Hard	Light	Sand
1370	30	910	1370			Soft	Dark	Slate
1370	30	880	1370			Soft	Dark	Slate
1370	30	850	1370			Soft	Dark	Slate
1370	30	820	1370			Soft	Dark	Slate
1370	30	790	1370			Soft	Dark	Slate
1370	30	760	1370			Soft	Dark	Slate
1370	30	730	1370			Soft	Dark	Slate
1370	30	700	1370			Hard	Light	Sand
1370	30	670	1370			Soft	Dark	Slate
1370	30	640	1370			Soft	Dark	Slate
1370	30	610	1370			Soft	Dark	Slate
1370	30	580	1370			Soft	Dark	Slate
1370	30	550	1370			Soft	Dark	Slate
1370	30	520	1370			Soft	Dark	Slate
1370	30	490	1370			Soft	Dark	Slate
1370	30	460	1370			Soft	Dark	Slate
1370	30	430	1370			Soft	Dark	Slate
1370	30	400	1370			Soft	Dark	Slate
1370	30	370	1370			Soft	Dark	Slate
1370	30	340	1370			Soft	Dark	Slate
1370	30	310	1370			Soft	Dark	Slate
1370	30	280	1370			Soft	Dark	Slate
1370	30	250	1370			Soft	Dark	Slate
1370	30	220	1370			Soft	Dark	Slate
1370	30	190	1370			Soft	Dark	Slate
1370	30	160	1370			Soft	Dark	Slate
1370	30	130	1370			Soft	Dark	Slate
1370	30	100	1370			Soft	Dark	Slate
1370	30	70	1370			Soft	Dark	Slate
1370	30	40	1370			Soft	Dark	Slate
1370	30	10	1370			Soft	Dark	Slate

Completed to sheet 12

PITTSBURGH & WEST VA GAS COMPANY

Well No. 6-5/8" 1222

December 21st, 1935

By, E. N. ...

09/29/2023

NOTE: All data on this report are based on information furnished by the well owner and the operator and are not to be used for any other purpose without the express written consent of the operator.

PITTSBURGH & WEST VA GAS

Company

COMPLETION DATA SHEET

CLARKSBURG, WEST VA.

Address

No. 2

WELL No. 5399

FARM Louisa J. Carpenter

FORMATION RECORD

Name	Color	Character	Oil, Gas or Water	Top	Bottom	Thickness	Total Depth	Remarks
Lime	White	Hard		1410	1440	30	1440	
Slate	Dark	Soft		1440	1490	50	1490	
L. Dunkard	Light	Hard		1490	1545	55	1545	
Slate	Dark	Soft		1545	1590	45	1590	
Big Dunkard	Light	Hard	G-1602'	1590	1651	61	1651	1600'-8 1/4"
Slate	Black	Soft		1651	1690	39	1690	
Lime	Light	Hard		1690	1730	40	1730	
Slate	Dark	Soft		1730	1750	20	1750	
Lime	White	Hard		1750	1775	25	1775	
Slate	Dark	Soft		1775	1890	115	1890	
1st. Salt Sand	White	Hard		1890	1918	28	1918	
Slate	Dark	Soft		1918	1930	12	1930	
2nd. Salt Sand	Light	Hard		1930	1970	40	1970	
Slate	Dark	Soft		1970	2070	100	2070	
Sand	White	Hard		2070	2130	60	2130	
Slate	Dark	Soft		2130	2170	40	2170	
Lime	White	Hard		2170	2225	55	2225	
Red Rock	Red	Soft		2225	2235	10	2235	
Lime	White	Hard		2235	2250	15	2250	
Slate	Dark	Soft		2250	2265	15	2265	
Little Lime	White	Hard		2265	2275	10	2275	
Slate	Dark	Soft		2275	2295	20	2295	
Big Lime	White	Hard		2295	2385	90	2385	2335'-6 5/8"
Big Injun	Light	"	G-2455-61	2385	2580	195	2580	
Slate&Shells	Dark	Open		2580	2690	110	2690	
Sand	White	Soft		2690	2710	20	2710	
Slate&Shells	Dark	"		2710	3070	360	3070	
Fifty Foot	White	Hard		3070	3090	20	3090	
Slate&Shells	Dark	"		3090	3125	35	3125	
Thirty Foot	White	Broken		3125	3145	20	3145	
Slate&Shells	Red	Soft		3145	3152	7	3152	
Gordon Stray	Dark	Hard		3152	3170	18	3170	
Slate & Shells	"	Soft		3170	3195	25	3195	
Gordon Sand	Light	Hard		3195	3250	55	3250	
Slate	Dark	Soft		3250	3277	27	3277	
4th. Sand	White	Hard	G-3293-95'	3277	3305	28	3305	
Slate	Dark	Soft		3305	3327	22	3327	
5th. Sand	White	Hard	G-3332-3335	3327	3340	13	3340	
Slate&Shell	Dark	Soft		3340	3480	140	3480	
Bayard Sand	White	Hard		3480	3485	5	3485	
Slate	Dark	Soft		3485	3521	36	3521	
Total Depth							3521'	

shot Not shot. Well was not shot at _____ feet; well was shot at _____ feet.

Salt _____ salt _____ Fresh water at _____ feet; fresh water at _____ feet.

producing Well was 6-5/8" hole. ~~3 1/2~~

PITTSBURGH & WEST VA GAS COMPANY.

December 31st, 1935.

By, F. E. Briden, *[Signature]*


Date

Approved _____

Owner

09/29/2023

NOTE: All bottom formations must be noted as indicated above and all key-rocks and oil and gas sands must be recorded under their proper geological names in the district as well as any local names commonly used in the district for such strata.



COMPLETION DATA SHEET

PITTSBURGH & WEST VA GAS

FORMATION RECORD

Louisa S. Carpenter

5399

Depth	Color	Texture	Gas	Pressure	Total Depth
1440	White	Hard		30	1440
1430	Dark	Soft		30	1430
1425	Light	Hard		35	1425
1420	Dark	Soft		45	1420
1415	Light	Hard		41	1415
1410	Black	Soft		53	1410
1405	Light	Hard		40	1405
1400	Dark	Soft		30	1400
1395	White	Hard		35	1395
1390	Dark	Soft		115	1390
1385	White	Hard		38	1385
1380	Light Sand	Soft		12	1380
1375	Dark	Soft		30	1375
1370	Light Sand	Hard		100	1370
1365	Dark	Soft		30	1365
1360	White	Hard		40	1360
1355	Dark	Soft		35	1355
1350	White	Hard		10	1350
1345	Red Rock	Soft		15	1345
1340	White	Hard		15	1340
1335	Dark	Soft		15	1335
1330	White	Hard		10	1330
1325	Little Lime	Hard		30	1325
1320	Dark	Soft		30	1320
1315	White	Hard		90	1315
1310	Big Lime	Hard		195	1310
1305	Big Intan	"		110	1305
1300	Stalactites	Open		30	1300
1295	White	Soft		30	1295
1290	Stalactites	"		30	1290
1285	White	Hard		30	1285
1280	Waxy Foot	Hard		35	1280
1275	Stalactites	"		35	1275
1270	Dark	"		30	1270
1265	White	Broken		30	1265
1260	Stalactites	Soft		7	1260
1255	Stalactites	Hard		18	1255
1250	Gordon Gray	Hard		35	1250
1245	Stalactites	Soft		35	1245
1240	Gordon Sand	Hard		35	1240
1235	Dark	Soft		27	1235
1230	White	Hard		38	1230
1225	Stalactites	Hard		38	1225
1220	Dark	Soft		32	1220
1215	White	Hard		12	1215
1210	Stalactites	Soft		140	1210
1205	White	Hard		5	1205
1200	Dark	Soft		38	1200


Total Depth 3321

Not shot.

By: F. E. Bickler

December 1st, 1935

2020/9/90



OIL OR GAS WELL Gas

PITTSBURGH & WEST VA GAS Company

COMPLETION DATA SHEET

CLARKSBURG, WEST VA. Address

No. 2

WELL No. 5399

FARM Louisa J. Carpenter

FORMATION RECORD

Name	Color	Character	Oil, Gas or Water	Top	Bottom	Thickness	Total Depth	Remarks
Began Drg. Deeper at		2469' B.I.Sand.						
Big Injun Sand	Dark	Open Hard	G-2455-61	2385	2580	195	2580	
Slate&Shell	Dark	Open		2580	2690	110	2690	
Sand	White	Soft		2690	2710	20	2710	
Slate&Shell	Dark	"		2710	3070	360	3070	
Fifty Foot	White	Hard		3070	3090	20	3090	
Slate&Shell	Dark	"		3090	3125	35	3125	
Thirty Foot	White	Broken		3125	3145	20	3145	
Slate&Shell	Red	Soft		3145	3152	7	3152	
Gordon Stray	Dark	Hard		3152	3170	18	3170	
Slate&Shells	"	Soft		3170	3195	25	3195	
Gordon Sand	Light	Hard		3195	3250	55	3250	
Slate	Dark	Soft		3250	3277	27	3277	
Fourth Sand	White	Hard	G-3293-95'	3277	3305	28	3305	
Slate	Dark	Soft		3305	3327	22	3327	
Fifth Sand	White	Hard	G-3332-35'	3327	3340	13	3340	
Slate&Shell	Dark	Soft		3340	3480	140	3480	
Bayard Sand	White	Hard		3480	3485	5	3485	
Slate	Dark	Soft		3485	3521	36	3521	
						Total Depth	3521	

shot Not shot. Well was not shot atfeet; well was shot atfeet.

Salt salt Fresh water atfeet; fresh water atfeet.

Well was ~~producing~~ 6-5/8" hole. dry

PITTSBURGH & WEST VA GAS COMPANY.

December 30th, 1935.

By, F. E. Bridgen


Date

Approved

Owner

09/29/2023

NOTE: All bottom formations must be noted as indicated above and all key-rocks and oil and gas sands must be recorded under their proper geological names in the district as well as any local names commonly used in the district for such strata.



Remarks	Test Length	Thickness	Bottom	Log	Oil Gas or Water	Formation	Color	Notes
	3380	195	3330	3383		Hard B.I. Sand.	Dark	See Dr. Deeper at 3483
	3380	170	3330	3380		Hard C-3433-01	Dark	Big Injun Sand
	3370	30	3370	3390		Open	Dark	Slatashell
	3370	30	3370	3370		Soft	White	Sand
	3370	30	3370	3370		"	Dark	Slatashell
	3360	30	3360	3070		Hard	White	Fifty Foot
	3355	35	3355	3090		"	Dark	Slatashell
	3345	30	3345	3135			White	Thirty Foot
	3345	7	3353	3133		Broken	White	Thirty Foot
	3340	13	3170	3133		Soft	Red	Slatashell
	3340	18	3170	3133		Hard	Dark	Gordon Gray
	3330	38	3133	3170		Soft	"	Slatashell
	3330	38	3330	3133		Hard	Light	Gordon Sand
	3327	37	3327	3330		Soft	Dark	Slate
	3325	38	3303	3327	C-3333-33	Hard	White	Fourth Sand
	3325	33	3327	3303		Soft	Dark	Slate
	3340	13	3340	3337	C-3333-33	Hard	White	Fifth Sand
	3430	140	3430	3340		Soft	Dark	Slatashell
	3435	5	3435	3430		Hard	White	Beyond Sand
	3431	38	3431	3435		Soft	Dark	Slate
	3321		Total Depth	3321				

Not shot.

XXXXXXXX

Well No. C-3433-01

PITTSBURGH & WEST VA GAS COMPANY.

Dr. E. E. Pittsboro

December 30th, 1933

09/29/2023

NOTE: All formation logs should be checked and approved by the engineer in charge and all logs should be returned to the office in the proper form for filing. A copy of the log should be filed in the office for each well.

29-8

NOTICE OF INTENTION TO PLUG AND ABANDON WELL

(REQUIRED BY SECTION 9, ARTICLE 4, CHAPTER 22 OF THE CODE)

WEST VIRGINIA DEPARTMENT OF MINES

OIL AND GAS DIVISION

To THE DEPARTMENT OF MINES,
Charleston, W. Va.

PITTSBURGH & WEST VA GAS COMPANY.

Wetzel Coal & Coke Company.

NAME OF WELL OPERATOR

~~XXXXXXXXXX~~ COAL OWNER
C/o Mr. A. A. Thompson.

CLARKSBURG, WEST VA.

Uniontown, Penna.,

COMPLETE ADDRESS

ADDRESS

A. F. Carpenter-Atty-In-Fact.

January 6th, 19 36

~~XXXXXXXXXX~~ COAL OPERATOR OR COAL OWNER
#817 Coleman Avenue.
Fairmont, West Va.

WELL TO BE ABANDONED

CHURCH

District

ADDRESS

Nancy Youst

WETZEL

County

LEASE OR PROPERTY OWNER

Well No. 5399

R.F.D. Glover Gap, West Va.

ADDRESS

Louisa J. Carpenter

Farm

Gentlemen:—

The undersigned well operator is about to abandon the above described well and will commence the

work of plugging and abandoning said well on the 13th day of January, 19 36,
(which date shall not be less than five days after the day on which this notice so mailed is received, or in
due course should be received by the Department of Mines).

This notice is given you in order that your respective representatives may be present at the plugging
and filling of said well. You are further notified that whether you are represented or not represented the
undersigned will proceed on that date, or shortly thereafter, to plug and fill said well in the manner
required by Section 10, Article 4, Chapter 22 of the Code and given in detail on the reverse side of this
notice, in "Work Order."

This notice is being mailed by registered mail to each of you at the above addresses on the above date.

Very truly yours,
PITTSBURGH & WEST VA GAS COMPANY.

By, F. E. Bridgen
Well Operator.

NOTE: Upon the abandonment of all wells drilled prior to June 1, 1929, a plat prepared by a competent
engineer, showing the district and county in which the tract of land is located, the name and acreage of same, the
names of the owners of adjacent tracts, and the location of the about to be abandoned well, determined by
and the courses and distances of such well from two permanent points or landmarks on said tract, shall be submitted
with this notice.



(Over)

09/29/2023

PROPOSED MANNER OF PLUGGING AND FILLING WELL

(REQUIRED BY RULES AND REGULATIONS)

WEST VIRGINIA DEPARTMENT OF MINES

OIL AND GAS DIVISION

WORK ORDER

Well to be plugged and filled as follows: Total Depth 3521 feet.

Clay or other non-porous material 3521 to 3050' (20' Above 50 Ft.Sand)
Cement 3050 to 3040'

Bridge hole at 2610' (30' Below B.I.Sand.)
Clay or other non-porous material 2610 to 2365' (20' Above Bot.Big Lime)
Wood Plug 2365 to 2362'
Lead Plug 2362 to 2361'
Cement 2361 to 2351'
Pull 6-5/8" Casing.

Bridge hole at 2000' (20' Below 2nd.Salt Sand)
Clay or other non-porous material 2000 to 1870' (20' Above 1st.Salt.)
Cement 1870 to 1860'

Bridge hole at 1681' (30' Below Big Dunkard Sand)
Clay 1681 to 1570' (20' Above Big Dunkard)
Pull 8-1/4" Casing.
Cement 1570 to 1560'

Bridge hole at 1365' (30' Below Sand)
Clay 1365 to 1148' (30' Below Pgh. Coal)
Cement 1148 to 1090' (20' Above Pgh. Coal)
Clay 1090 to 1035' (30' Below M.T.Coal)
Cement 1035 to 980' (20' Above M.T.Coal)
Clay or other non-porous material 980 to 793' (30' Below Fairview Coal)
Cement 793 to 740' (20' Above Fairview Coal)
Clay or other non-porous material 740 to 250'
Cement 250 to 240' (25' Below 10" Casing)
Clay or other non-porous material 240' to surface. (Pulling 10" Casing)

Erect marker such as is described in Rule 18, 1931, Regulations.
All to be done in a workman like manner.

NOTE: Pull casing as hole is being filled and plugged.

To the Department of Mines,
Coal Owner or Operator,
Lease or Property Owner.

Gentlemen:

This "work order" is submitted for your approval and concurrence and unless notified of your dis-approval or non-concurrence, the undersigned will proceed with the plugging and filling of said well in the above described manner on the date stated in the notice of intention to plug and abandon the said well on opposite side of this sheet.

Very truly yours,
PITTSBURGH & WEST VA GAS COMPANY.

By, F. E. Bridgen,
Well Operator.

No objections have been filed by the coal owner or coal operator, or any available adjacent lease or property owners or interposed by the Department of Mines to the manner herein described for the plugging and filling of the well above mentioned. Therefore, the same is hereby approved this 8th day of January, 1936

DEPARTMENT OF MINES
Oil and Gas Division

09/29/2023

By:

NOTE: This "work order" must be filed in duplicate, one copy for the files of the Department of Mines and the other to be approved or corrected and returned to the well operator as his authority for plugging said well.

Wet - 29 - P

AFFIDAVIT IN TRIPPLICATE TO TIME AND MANNER OF PLUGGING AND FILLING WELL

(REQUIRED BY SECTION 9, ARTICLE 4, CHAPTER 22 OF THE CODE)

WEST VIRGINIA DEPARTMENT OF MINES OIL AND GAS DIVISION

Wetzel Coal & Coke Company. COAL OPERATOR OWNER
C/O MR A.A. Thompson, Uniontown, Pa. ADDRESS
A.F. Carpenter, Atty-In-Fact., COAL OPERATOR OWNER
817 Coleman Avenue, Fairmont, W. Va. ADDRESS
Nancy Youst LEASE OR PROPERTY OWNER
RF.D. Glover Gap, West Va. ADDRESS

PITTSBURGH & WEST VIRGINIA GAS COMPANY. NAME OF WELL OPERATOR
CLARKSBURG? WEST VA. COMPLETE ADDRESS
February 28th, 19 36. WELL AND LOCATION
CHURCH District
WETZEL County
Well No. 5399
Louisa J. Carpenter Farm

AFFIDAVIT TO BE MADE IN TRIPPLICATE, ONE COPY TO BE MAILED BY REGISTERED MAIL TO THE DEPARTMENT, ONE COPY TO BE RETAINED BY THE WELL OPERATOR AND THE THIRD COPY (AND EXTRA COPIES IF REQUIRED) TO BE MAILED TO EACH COAL OPERATOR ABOVE NAMED AT THEIR RESPECTIVE ADDRESSES.

AFFIDAVIT

STATE OF WEST VIRGINIA, }
COUNTY OF Wetzel } SS:

Martin Horner and John L. Ashcraft
being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Pittsburgh & West Va. Gas Co., well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 13th day of January, 19 36., and that the well was plugged and filled in the following manner:

Manner in which sand was plugged: Total Depth 3521 feet.
Clay 3521 to 3050 feet, (20 feet above 50 Ft. Sand.) Cement 3050 to 3040 feet.
Hole bridged at 2610 feet, (30 feet Below B.I.Sand.) Clay 2610 to 2365 feet.
(20 feet Above Bottom Big Lime.) Wood Plug 2365 to 2362 feet,
Lead Plug 2362 to 2361 feet, Cement 2361 to 2351 feet.
Hole bridged at 2000 feet, (20 feet below 2nd, Salt Sand.) Clay 2000 to 1870 feet,
(20 feet above 1st, Salt Sand.) Cement 1870 to 1860 feet.
Hole bridged at 1681 feet, Clay 1681 to 1603 feet, Wood plug 1603 to 1600 feet.
Clay 1600 to 1570 feet, Wood Plug 1570 to 1567 feet.
Manner in which coal was plugged: Hole bridged at 1365 feet, (30 feet below sand.)
Clay 1365 to 1148 feet. (30 feet Below Pgh. Coal.) Cement 1148 to 1090 feet.
(20 feet Above Pgh. Coal.) Clay 1090 to 1035 feet. (30 feet below M.T. Coal.)
Cement 1035 to 980 feet. (20 feet above M.T. Coal.)
Clay 980 to 793 feet. (30 feet Below Fairview Coal.) Cement 793 to 740 feet.
(20 feet Above Fairview Coal.) Clay 740 to 250 feet.
Cement 250 to 240 feet, (25 feet below 10" Casing.)
Clay 240 feet to surface.

Description of monument: Cement & Iron Pipe Post, Pittsburgh & West Virginia Gas Company #5399.

(THE ABOVE DESCRIPTIONS MUST BE IN DETAIL AND IN ACCORDANCE WITH THE PROVISIONS OF SECTION 10, ARTICLE 4, CHAPTER 22 OF THE CODE)


and that the work of plugging and filling said well was completed on the 27th day of February, 19 36.

And further deponents saith not.

Sworn to and subscribed before me this 29 day of Feb, 1936

Martin Horner
John L. Ashcraft
Shuman a Notary
Notary Public

My Commission expires: 14, 1940.

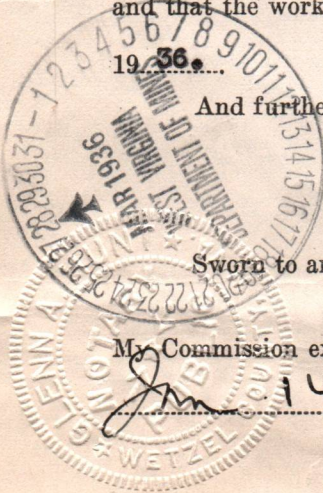

PITTSBURGH & WEST VIRGINIA GAS COMPANY.

Weston Coal & Coke Company.

CLARKSBURG, WEST VA.

C/O MR. A.A. Thompson, Uniontown, Pa.

February 28th, 1933.

A.A. Carpenter, Atty-in-Fact.

CHURCH

317 Colman Avenue, Baltimore, W. Va.

WITNESSES

Nancy Young

1933

H. D. Glover, West Va.

Louis J. Carpenter

AFFIDAVIT

Weston

John L. Schorff

Martin Horner

Pittsburgh & West Va. Gas Co.

1933, January

Total depth 3321 feet.

Clay 3321 to 3050 feet, (30 feet above 30 ft. sand.) Cement 3050 to 3040 feet.

Hole bridged at 3310 feet, (30 feet below R.I. sand.) Clay 3310 to 3325 feet.

(30 feet above Bottom Big Limestone.) Wood ring 3325 to 3322 feet.

Lead ring 3322 to 3321 feet. Cement 3321 to 3321 feet.

Hole bridged at 3000 feet, (30 feet below sand.) Clay 3000 to 1870 feet.

(30 feet above fat, salt sand.) Cement 1870 to 1800 feet.

Hole bridged at 1821 feet, Clay 1821 to 1803 feet, Wood ring 1803 to 1809 feet.

Clay 1800 to 1870 feet, Wood ring 1870 to 1827 feet.

Hole bridged at 1825 feet, (30 feet below sand.)

Clay 1825 to 1148 feet, (30 feet below Fat Coal.) Cement 1148 to 1090 feet.

(30 feet above Fat Coal.) Clay 1090 to 1035 feet, (30 feet below M.I. Coal.)

Cement 1035 to 950 feet, (30 feet above Fat Coal.)

Clay 950 to 793 feet, (30 feet below Fat Coal.) Cement 793 to 740 feet.

(30 feet above Fat Coal.) Clay 740 to 530 feet.


Cement 530 to 340 feet, (30 feet below Fat Coal.)

Clay 340 feet to surface.

Cement & Iron Pipe Test, Pittsburgh & West Virginia Gas

February 27th, 1933

09/29/2023



E4

Pittsburgh and West Virginia Gas Company

435 Sixth Avenue

Pittsburgh, Pa.

Clarksburg, W. Va.,

October 6th, 1930.

Mr. L. W. Brown,

Department of Mines, Oil & Gas Division,

Charleston, W. Va.

Dear Sir:

I find a correction necessary on our location No. 5399, A. H. Carpenter, Church District, Wetzel County, West Virginia. The distance on call S. 4 Deg. 30 Min. E. from stone corner of A. Furbee, J. D. Horner and A. H. Carpenter was printed 480 feet instead of 380 feet.

Very truly yours,

F. E. BRIGDEN.
Pittsburgh & W. Va. Gas Co.
Clarksburg, W. Va.

FEB/NGC.

Copy to J. H. Newlon
Wetzel Coal & Coke Co.
H. N. Carpenter Heirs.

OK
L. J. B
File with papers on
Well no. 5399
West,



E-5

PITTSBURGH AND WEST VIRGINIA GAS COMPANY

~~136 SIXTH AVENUE~~
~~PITTSBURGH, PENNSYLVANIA~~



Clarksburg, West Va.,
October 30th, 1935.

Subject: Well No. 5399, Louisa J. Carpenter farm,
Well to be drilled deeper

West Virginia Department of Mines
Oil and Gas Division.
Charleston, West Va.

Gentlemen:


In accordance with Chapter 22, Article No. 4, Section 2, Oil and Gas Wells., Official Code of West Va. We enclose Form G-1, Notice of Proposed Location of Oil and Gas Well, Form G-10, Preliminary Data Sheet No. 1, Form G-11, Completion Data Sheet No. 2, Formation Record, and plat showing location of our Well No. 5399, Louisa J. Carpenter farm, Church District, Wetzel County, West Va.

Yours truly,

PITTSBURGH & WEST VA GAS COMPANY.

F. E. Brigden, *F. E. Brigden*

FEB/M



09/29/2023

PITTSBURGH AND WEST VIRGINIA GAS COMPANY



PITTSBURGH AND WEST VIRGINIA GAS COMPANY

Charlestown, West Va.,
October 30th, 1933.

Subject: Well No. 2322, Lewis J. Carpenter farm,
Well to be drilled deeper

West Virginia Department of Mines
Oil and Gas Division.
Charlestown, West Va.

Gentlemen:

In accordance with Chapter 22, Article No. 4, Section 2, Oil and Gas Wells, Official Code of West Va. We enclose Form G-1, Notice of Proposed Location of Oil and Gas Well, Form G-10, Preliminary Data Sheet No. 1, Form G-11, Completion Data Sheet No. 2, Formation Record, and plat showing location of our Well No. 2322, Lewis J. Carpenter farm, Church District, Wetzel County, West Va.

Yours truly,

PITTSBURGH AND WEST VIRGINIA GAS COMPANY.

F. E. Bridger



FEB 19

9-6
November 1, 1935

Wetzel Coal & Coke Company
c/o Mr. A. A. Thompson
Uniontown, Pennsylvania

Gentlemen:

A notice of a proposed location of oil or gas Well No. 5399 on the Louisa J. Carpenter farm, Church District, Wetzel County, has been received from the Pittsburgh and West Virginia Gas Company. A copy of this notice with an attached map should have been mailed you by the well operator.

If you have any objections to make to the proposed location that come under our jurisdiction, please file same not later than November 11, 1935.

Very truly yours,

NPR/AS

Chief of Department of Mines

09/29/2023

E-7

November 12, 1936

Pittsburgh and West Virginia Gas Company
Clarksburg, West Virginia

Gentlemen:

Permit to drill deeper Well No. 5399
on the Louisa J. Carpenter, et al Farm,
Church District, Wetzel County, is enclosed.

Just as soon as the well is completed,
please fill out the enclosed blanks and return
to this office.

Very truly yours,

NPR/AS

Chief of Department of Mines

By

09/29/2023

E-8

PITTSBURGH AND WEST VIRGINIA GAS COMPANY

~~XXXXXXXXXXXX~~

~~PITTSBURGH AND WEST VIRGINIA GAS COMPANY~~



Clarksburg, West Va.,
December 30th, 1935.

Subject: Well No. 5399, L. J. Carpenter farm,
Well drilled deeper.

West Virginia Department of Mines
Oil and Gas Division.
Charleston, West Va.

Gentlemen:


Enclose you herewith Form G-10, Preliminary
Data Sheet No. 1, Form G-11, Completion Data Sheet No. 2,
Formation Record on drilling deeper Well No. 5399, L. J.
Carpenter farm, Church District, Wetzel County, W. Va.

Yours truly,

PITTSBURGH & WEST VA GAS COMPANY.

F. E. Brigden
F. E. Brigden,

FEB/M



PITTSBURGH AND WEST VIRGINIA GAS COMPANY

XXXXXXXXXX

XXXXXXXXXXXXXXXXXXXX



Blacksburg, West Va.
December 30th, 1935.

Subject: Well No. 3399, E. V. Carpenter farm,
Well drilled deeper.

West Virginia Department of Mines
Oil and Gas Division
Charleston, West Va.

Gentlemen:

Enclose you herewith Form G-10, Preliminary
Data Sheet No. 1, Form G-11, Completion Data Sheet No. 2,
Formation Record on drilling deeper Well No. 3399, E. V.
Carpenter farm, Kanawha District, West Virginia.

Yours truly,

PITTSBURGH & WEST VA GAS COMPANY

J. A. Higgins

REBVM



E-9

PITTSBURGH AND WEST VIRGINIA GAS COMPANY

~~435 SIXTH AVENUE~~

~~PITTSBURGH KENTUCKY KENTON~~



Clarksburg, West Va.,
January 6th, 1936.

Subject: Well No. 5399, L.J. Carpenter farm.
Well to be plugged.

West Virginia Department of Mines
Oil and Gas Division.
Charleston, West Va.

Gentlemen:


In accordance with Chapter 22, Article No. 4, Section 9, Oil and Gas Well. Official Code of West Virginia. We enclose Form G-9, Notice of Intention to plug and abandon well. Form G-10, Preliminary Data Sheet No. 1, Form G-11, Completion Data Sheet No. 2, Formation Record, and plat showing location of our Well No. 5399, L. J. Carpenter farm, Church District, Wetzel County, West Va.,

Yours truly,

PITTSBURGH & WEST VA GAS COMPANY.

F. E. Brigden, *F. E. Brigden*

FEB/M



09/29/2023

PITTSBURGH AND WEST VIRGINIA GAS COMPANY

XXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXX



Charleston, West Va.,
January 8th, 1936.

Subject: Well No. 2309, E. J. Carpenter farm.
Well to be plugged.

West Virginia Department of Mines
Oil and Gas Division
Charleston, West Va.

Gentlemen:

In accordance with Chapter 23, Article No. 4, Section 2, Oil and Gas Well. Official Code of West Virginia, we enclose Form G-9, Notice of Intention to plug and abandon well. Form G-10, Preliminary Data Sheet No. 1, Form G-11, Completion Data Sheet No. 2, Formation Record, and plat showing location of our Well No. 2309, E. J. Carpenter farm, Church District, Wetzel County, West Va.

Yours truly,

PITTSBURGH & WEST VA GAS COMPANY

E. E. Bridgen



TRM

E-10

PITTSBURGH AND WEST VIRGINIA GAS COMPANY

~~XXXX SIXTH AVENUE XXX~~
~~PITTSBURGH, PENNSYLVANIA XXX~~

Clarksburg, West Va.,
March 27th, 1936.

Subject: Well No. 5399, L. J. Carpenter farm.
Well plugged.

West Virginia Department of Mines
Oil and Gas Division.
Charleston, West Va.

Gentlemen:


In accordance with Chapter 22, Article No. 4,
Section 9, Oil and Gas Wells. Official Code of West Va.,
We enclose Form G-8, Affidavit to time and manner of
plugging and filling Well No. 5399, L. J. Carpenter farm,
Church District, Wetzel County, W. Va.

Yours truly,

PITTSBURGH & WEST VA GAS COMPANY.

F. E. Bridger
F. E. Bridger

FEB/M



09/29/2023

PITTSBURGH AND WEST VIRGINIA GAS COMPANY

XXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXX

Charleston, West Va.,
March 27th, 1938.

Subject: Well No. 5399, I. J. Carpenter farm,
West Virginia.

West Virginia Department of Mines
Oil and Gas Division
Charleston, West Va.

Gentlemen:

In accordance with Chapter 28, Article No. 4,
Section 2, Oil and Gas Wells, Official Code of West Va.,
we enclose Form O-3, Affidavit to title and manner of
planning and filling Well No. 5399, I. J. Carpenter farm,
Greenbrier District, West Virginia.

Yours truly,

PITTSBURGH AND WEST VIRGINIA GAS COMPANY

[Handwritten signature]
F. H. Frigo



KEB/M



LOCATION OF WELL NO. 5399 TO BE ABANDONED

PITTSBURGH & W.VA. GAS COMPANY OF PITTSBURGH PA.

LEASE NO. 3465 LESSOR LOUISA J. CARPENTER ACRES 24
 DISTRICT CHURCH COUNTY WETZEL STATE W.VA.
 QTR. QUADRANGLE MANN. S.W. 1-1 DATE MAY 27-1930 NO. ON LEASE 1
 LEASE EXPIRES -- F. RESERVATION ELEVATION 1427-L.

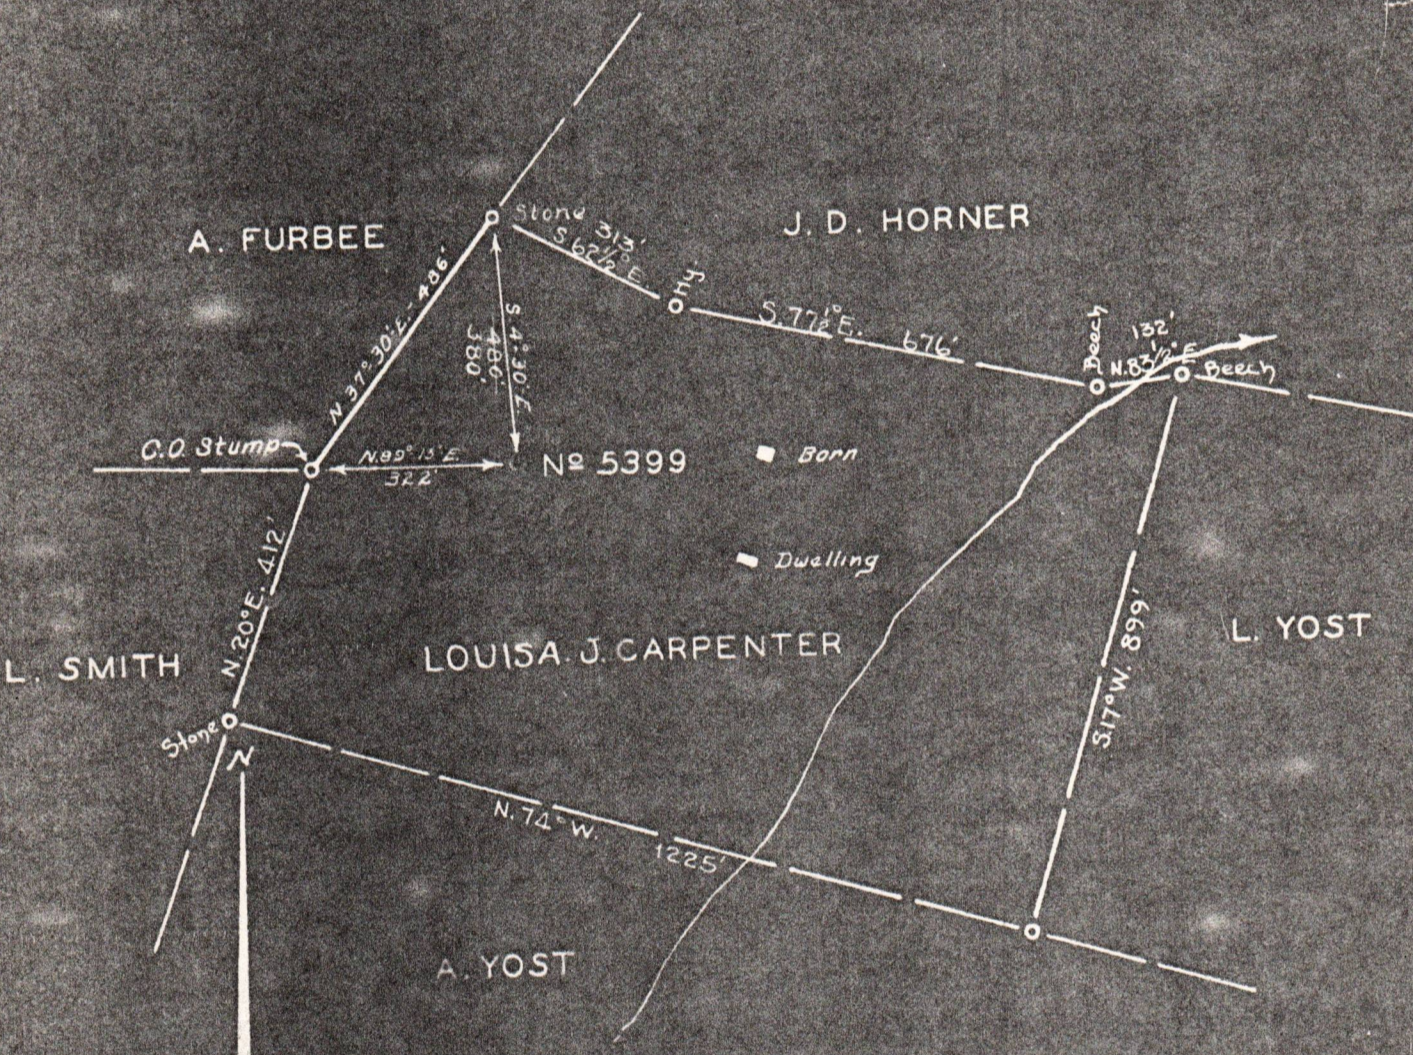

SCALE: 1" = 300'

ENGINEER'S CERTIFICATE

I, THE UNDERSIGNED, HEREBY CERTIFY THAT THIS MAP IS CORRECT AND SHOWS ALL THE INFORMATION TO THE BEST OF MY KNOWLEDGE AND BELIEF, REQUIRED BY THE OIL AND GAS SECTION OF THE MINING LAWS OF WEST VIRGINIA.

W.B. McMaster
 ENGINEER

ACKNOWLEDGED BEFORE ME A Notary Public
 DAY OF June 30

THIS 3rd

W.B. McMaster