

STATE OF WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: Emch, H.L. & Pyles, Amanda Operator Well No.: Emch/Pyles # 1

LOCATION: Elevation: 1,345' Quadrangle: New Martinsville  
District: Proctor County: Wetzel  
Latitude: 0 Feet South of 39 Deg. 40 Min. 40.76 Sec.  
Longitude: 0 Feet West of 80 Deg. 49 Min. 24.12 Sec.

Well Type: OIL \_\_\_\_\_ GAS

Company Stone Energy Corporation Coal Operator No Coal Operator  
6000 Hampton Center, Suite B or Owner \_\_\_\_\_  
Morgantown, WV 26505 \_\_\_\_\_  
Agent Timothy P. McGregor Coal Operator None Declared  
Permit Issued Date April 24, 2012 or Owner \_\_\_\_\_

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of Monongalia ss:

Jerry Holcomb and Steve Simmons being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 16th day of April, 2012 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Brine Water	6,990 TD	6,600'	5.5" - 5,806'	11.75" Surface to 333'
Cement	6,600'	6,000'		8.625" Surface to 2,383'
Cement	5,806'	4,783'		5.5" from 5,806' to 6,990'
Cement	3,124'	1,907'		
Cement	1,127'	920'		
Cement	433'	Surface		
6% Gel	Between All Of The	Cement Plugs		


Description of monument: 5.5" Steel Pipe with API number welded to monument and that the work of plugging and filling said well was completed on the 4th day of May, 2012.

And further deponents saith not.

Sworn and subscribe before me this 23<sup>rd</sup> day of May, 2012

My commission expires: May 18, 2021

Danielle S. Snoderly  
Notary Public

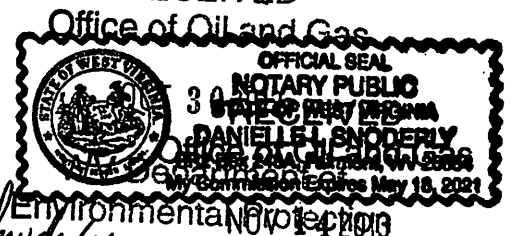

Affidavit reviewed by the Office of Oil and Gas: \_\_\_\_\_

Title: Department of Environmental Protection  
WV Department of Environmental Protection  
4/22/2013