

Received
Office of Oil & Gas
NOV 25 2015

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: Mary B. Long Operator Well No.: 1
 Location: Elevation: 722' Quadrangle: Pine Grove 7.5'
 District: Grant County: Wetzel
 Latitude: _____ Feet South of: _____ Deg. _____ Min. _____ Sec.
 Longitude: _____ Feet West of: _____ Deg. _____ Min. _____ Sec.

Well Type: Oil x Gas _____ WIW _____

Company: HG Energy, LLC Coal Operator Murray Coal
5260 Dupont Road or Owner 43226 National Road
Parkersburg, WV 26101 St. Clairsville, OH 43950
 Agent: Diane White Coal Operator NA
 or Owner _____

Permit Issued: 12-12-14

AFFIDAVIT

State of West Virginia, County of Wood ss:

Jared Stemple and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 24th day of March, 20 15 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Cement	2585	2390		
Cement	1800	1670	5-3/16" 1720'	140'
Cement	1050	905	6-5/8" 990'	777'
Cement	780	650	8-1/4" 220'	787'
Cement	545	438		
Cement	275	140		
Cement	130	surface		
Perforated casing 2450' - 2550' (1 shot / 10') 675' - 775' (1 shot / 10') 450' - 550' (1 shot / 10')				
490' - 500' (1 shot / 1')				
6% gel between cement plugs				

Received

NOV 25 2015

Office of Oil and Gas
WV Dept. of Environmental Protection

Description of monument: 7" x 30" and that the work of plugging and filling said well was completed on the 22nd day of April, 20 15


And further deponents saith not.

Sworn and subscribed before me this 23rd day of November, 20 15
My commission expires: April 2020

Notary Public [Signature]

Affidavit reviewed by the Office of Oil and Gas: [Signature]

Title: Oil & Gas Inspector

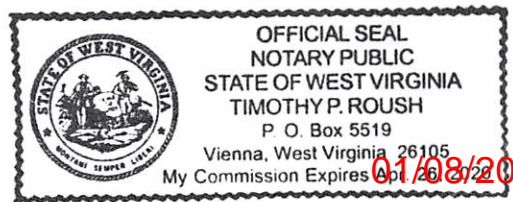

01/08/2016