

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor
Randy C. Huffman, Cabinet Secretary
www.dep.wv.gov

PERMIT MODIFICATION APPROVAL

October 18, 2013

ANTERO RESOURCES APPALACHIAN CORPORATION 1625 17TH STREET, SUITE 300 DENVER, CO 80202

Re: Permit Modification Approval for API Number 1706174 , Well #: RIGHT HAND UNIT 2H Changed bottom hole

Oil and Gas Operator:

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

Please call James Martin at 304-926-0499, extension 1654 if you have any questions.

Sincerely.

Gene Smith

Regulatory/Compliance Manager

Office of Oil and Gas



September 10, 2013

Antero Resources 1625 17th Street Denver, Colorado 80202 Office 303.357.7310 Fax 303.357.7315

West Virginia Department of Environmental Protection Office of Oil and Gas Attn: Ms. Laura Cooper 601 57th Street Charleston, WV 25304

Ms. Laura Cooper:

Antero Resources Corporation (Antero) would like to submit the following permit modification for one approved well on the Richard Garry Pad. We are requesting to move the horizontal lateral which will change the bottom hole location of the Right Hand Unit 2H (API# 47-017-06174). Please note that no new leases will be drilled through, so a revised Form WW-6A1 is not included.

Attached you will find the following documents:

- REVISED Form WW-6B, which shows the revised MD and Production Casing/Cement program
- > REVISED Mylar Plat, which shows the new bottom hole location

If you have any questions please feel free to contact me at (303) 357-7323.

Thank you in advance for your consideration.

Sincerely,

Ashlie Mihalcin

Permit Representative

Antero Resources Corporation

Enclosures

Received

SEP 2 0 2013

Office of Oil and Gas
WV Dept. of Environmental Protection

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operator:	Antero R	esources C	Corporation	494488557	017- Doddridge	New Milton	New Milton 7.5'		
•				Operator ID	County	District	Quadrangle		
2) Operator's Well	Number:	Right Hand U	Init 2H	W	ell Pad Nam	e: Existing Richard	Garry Pad		
3 Elevation, current ground: 1156' Elevation, proposed post-construction: 1156'									
4) Well Type: (a) Gas Oil Underground Storage							_		
	Other _								
(b) I:		Shallow		Deep					
		Horizontal							
5) Existing Pad? Ye	5) Existing Pad? Yes or No: No								
6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s): Marcellus Shale: 7,100' TVD, Anticipated Thickness- 60' feet, Associated Pressure- 3,250#									
7) Proposed Total V	ertical De	pth: 7,	100' TVD						
8) Formation at Total	al Vertical	Depth:	Marcellus Shale						
9) Proposed Total M	Aeasured D	Depth:	13,500' MD						
10) Approximate Fr	esh Water	Strata Dep	ths: <u>54</u>	, 306'					
11) Method to Determine Fresh Water Depth: Offset well records. Depths have been adjusted according to surface elevations.									
12) Approximate Saltwater Depths: 1372', 1780'									
13) Approximate Co	oal Seam D	Depths:	879', 1210'						
14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated									
15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine:									
16) Describe proposed well work: Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale									
-									
17) Describe freetur	in a/stimul	ating mathe	ode in detail:						
17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent									
water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well."									
					0.50	2.0.0010			
SEP 2 0 2013 18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 25.30 acres (existing)									
19) Area to be disturbed for well pad only, less access road (acres): 6.04 @diffesc(existing) and Gas WV Dept. of Environmental Protection Page 1 of 3									
			er en recipio especial (Constitution Territor Territor)	· · · · · · · · · · · · · · · · · · ·	WV Dept. of Er	nvironmental Pro	Page 1 of 3		

WW - 6B (3/13)

20)

CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	361'	361'	CTS, 502 Cu. Ft.
Coal	9-5/8"	New	J-55	36#	2470'	2470'	CTS, 1006 Cu Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	13500'	13500'	3319 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7200'	
Liners							

ТҮРЕ	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

PACKERS

Kind:	N/A		
Sizes:	N/A	Das	
Depths Set:	N/A	Het	eived

SEP 2 0 2013

21) Describe centralizer placement for each casing string.

Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th joint spaced up the hole to surface.

Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th collar to surface.

Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casing.

22) Describe all cement additives associated with each cement type.

Conductor: no additives, Class A cement.

Surface: Class A cement with 2% calcium and 1/4 lb flake, 5 gallons of clay treat

Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of clay treat

Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51

Production: Tall cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20

23) Proposed borehole conditioning procedures.


Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.

Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate 40 bbls brine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to base of curve, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

*Note: Attach additional sheets as needed.



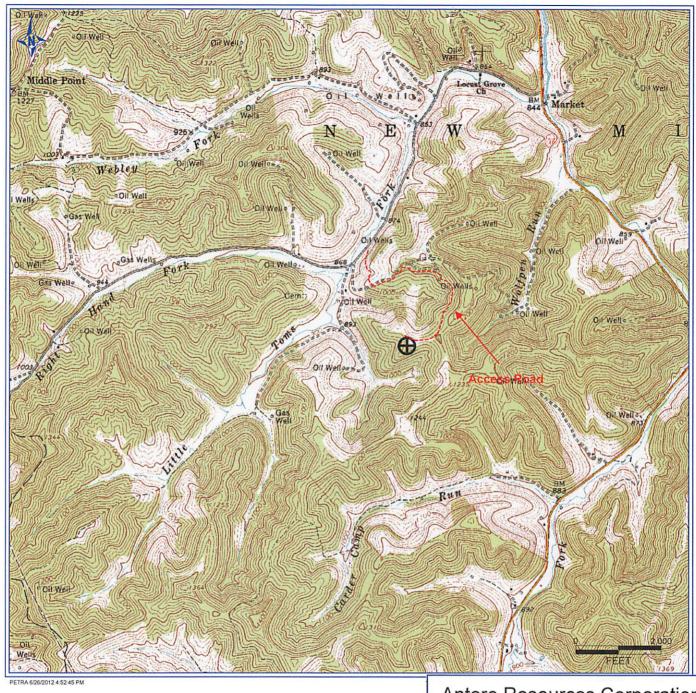

Antero Resources Corporation

APPALACHIAN BASIN

Right Hand Unit 2H

Doddridge County

PEET

REMARKS

QUADRANGLE: NEW MILTON

WATERSHED:TRIB. OF LITTLE TOMS FORK
DISTRICT: NEW MILTON

Date: 11/6/2012

