

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

November 20, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-1706329, issued to EQT PRODUCTION COMPANY, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: WV 513140

Farm Name: HEASTER, CHARLES P., ET AL

API Well Number: 47-1706329

Permit Type: Horizontal 6A Well

Date Issued: 11/20/2013

API Number: 1706329

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW - 6B (3/13) ^t

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS W.VA. CODE §22-6A - WELL WORK PERMIT APPLICATION

1) Well Operator: EQT F	Production Company			017	8	526
			Operator ID	County	District	Quadrangle
2) Operator's Well Number	r:	513140		_Well Pad Name	0	XF156
3 Elevation, current ground	: 1,244'	Eleva	tion, proposed p	ost-construction:	1,203'	
4) Well Type: (a) Gas	Oil	Un	derground Stora	age		
Other						
(b) If Gas:	Shallow	•	Deep			DCN 2013
5) Existing Pad? Yes or No.	Horizontal : no	•			4	7-16-2010
		oinated Thirt	(nanan amal 4)	interd C	•	
6) Proposed Target Format Target formation is M						
Talget formation is iv	farcellus at a depth of 661	o will the antic	pared inickness to	be 54 feet and anticipa	ited target pressu	re of 4449 PSI
7) Proposed Total Vertical [Depth:			6,613'		
8) Formation at Total Vertic				Marcellus	·	
9) Proposed Total Measure				15, 535'		
10) Approximate Fresh Wat		***************************************	164, 21	1, 315, 381, 457,	595 & 1079	
11) Method to Determine Fr				By offset wells		
12) Approximate Saltwater I			1:	383 & 1451	,	
13) Approximate Coal Seam	Depths:			1267 & 1307	·	
14) Approximate Depth to P	ossible Void (coal min	ne, karst, oth	er):		None report	ed
15)Does proposed well lo					THORIC TEPOT	eu
adjacent to an active m					None Report	ad
16) Describe proposed well	work: Drill and	complete a nev	v horizontal well in the	ne marcellus formation	The vertical drift	I to go down to
an approximate depth of 4,950	B'. Then kick off the horizon	ntal leg into the	marcellus usino a s	lick water frac	. The vertical diff	to go down to
			condo conig a c	mor water nac.		
						
17) Describe fracturing/stimu						
Hydraulic fracturing is completed in	accordance with state reg	julations using v	water recycled from	previously fractured w	ells and obtained	from
reshwater sources. This water is n	nixed with sand and a sma	ill percentage (k	ess than 0.3%) of cl	nemicals (including 15	% Hydrochloric ac	eid,
gelling agent, gel breaker, friction r	educer, biocide, and scale	inhibitor). Stag	e lengths vary from	150 to 450 feet. Aver	age approximately	1
100,000 gallons of water per stage.	Sand sizes vary from 100	mesh to 20/40	mesh. Average ap	proximately 400,000 p	ounds of sand pe	r stage.
8) Total area to be disturbed				· · · · · · · · · · · · · · · · · · ·	± 37.43	
9) Area to be disturbed for v	vell pad only, less acc	cess road (ad	cres):		± 26.22	

Office of Oil & Gas

SEP 0 3 2013

Page 1 of 3

WV Department of Environmental Protection

CASING AND TUBING PROGRAM

20)

TYPE	<u>Size</u>	New	Grade	Weight per	FOOTAGE:	INTERVALS:	CEMENT:
		<u>or</u> <u>Used</u>		<u>ft.</u>	for Drilling	Left in Well	Fill- up (Cu.Ft.)
Conductor	20	New	Varies	81	40	40	38
Fresh Water	13 3/8	New	MC-50	54	1,179	1,179	1,018
Coal	-	-	-	•	-	-	-
Intermediate	9 5/8	New	MC-50	40	2,963	2,963	1,151
Production	5 1/2	New	P-110	20	15,535'	15,535'	See Note 1
Tubing	2 3/8		J - 55	4.6			May not be run, if run will be set
Liners							

TYPE	Size	Wellbore Diameter	<u>Wall</u> <u>Thickness</u>	<u>Burst</u> <u>Pressure</u>	<u>Cement</u> <u>Type</u>	Cement Yield
Conductor	20	24	0.635	-	Construction	1.18
Fresh Water	13 3/8	17 1/2	0.38	2,480	1	1.21
Coal	-	-	•	-	-	-
Intermediate	9 5/8	12 3/8	0.395	3,590	1	1.21
Production	5 1/2	8 1/2	0.361	12,640	-	1.27/1.86
Tubing						
Liners						

<u>Packers</u>

DCN 8-16-2013

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	

Note 1: EQT plans to bring the TOC on the production casing cement job 1,000' above kick off point, which is at least 500' above the shallowest production zone, to avoid communication.

Page 2 of 3

Office Of 0 3 2013

WV Department of Environmental Protection

21) Describe centralizer placement for each casing string.
Surface: Bow spring centralizers – One at the shoe and one spaced every 500'.
Intermediate: Bow spring centralizers— One cent at the shoe and one spaced every 500'.
Production: One spaced every 1000' from KOP to Int csg shoe
22) Describe all cement additives associated with each cement type. Surface (Type 1 Cement): 0-3% Calcium Chloride
Used to speed the setting of cement slurries.
0.4% flake. Loss Circulation Material (LCM) is used to combat the loss of the cement slurry to a thief zone.
Intermediate (Type 1 Cement): 0-3% Calcium Chloride. Salt is used in shallow, low temperature formations to speed the setting of cement
slurries. 0.4% flake. Loss Circulation Material (LCM) is used to combat the loss of whole drilling fluid or cement slurry (not filtrate)
to a thief zone.
Production:
Lead (Type 1 Cement): 0.2-0.7% Lignosulfonate (Retarder). Lengthens thickening time.
0.3% CFR (dispersant). Makes cement easier to mix.
Tail (Type H Cement): 0.25-0.40% Lignosulfonate (Retarder). Lengthens thickening time.
0.2-0.3% CFR (dispersant). This is to make the cement easier to mix.
60 % Calcuim Carbonate. Acid solubility.
0.4-0.6% Halad (fluid loss). Reduces amount of water lost to formation.
23) Proposed borehole conditioning procedures. <u>Surface</u> : Circulate hole clean (Approximately 30-45 minutes) rotating & reciprocating
one full joint until cuttings diminish at surface. When cuttings returning to surface diminish, continue to circulate an additional 5
minutes. To ensure that there is no fill, short trip two stands with no circulation. If there is fill, bring compressors back on

minutes. To ensure that there is no fill, short trip two stands with no circulation. If there is fill, bring compressors back on and circulate hole clean. A constant rate of higher than expected cuttings volume likely indicates washouts that will not clean up.

Intermediate: Circulate hole clean (Approximately 30-45 minutes) rotating & reciprocating one full joint until cuttings diminish at surface. When cuttings returning to surface diminish, continue to circulate an additional 5 minutes. If foam drilling, to enhance hole cleaning use a soap sweep or increase injection rate & foam concentration.

Production: Pump marker sweep with nut plug to determine actual hole washout. Calculate a gauge holes bottoms up volume.

Perform a cleanup cycle by pumping 3-5 bottoms up or until the shakers are clean. Check volume of cuttings coming across

the shakers every 15 minutes.


*Note: Attach additional sheets as needed.

Page 3 of 3



EQT Production

Oxford Azimuth 335
Doddridge West Virgina Vertical Section 8148

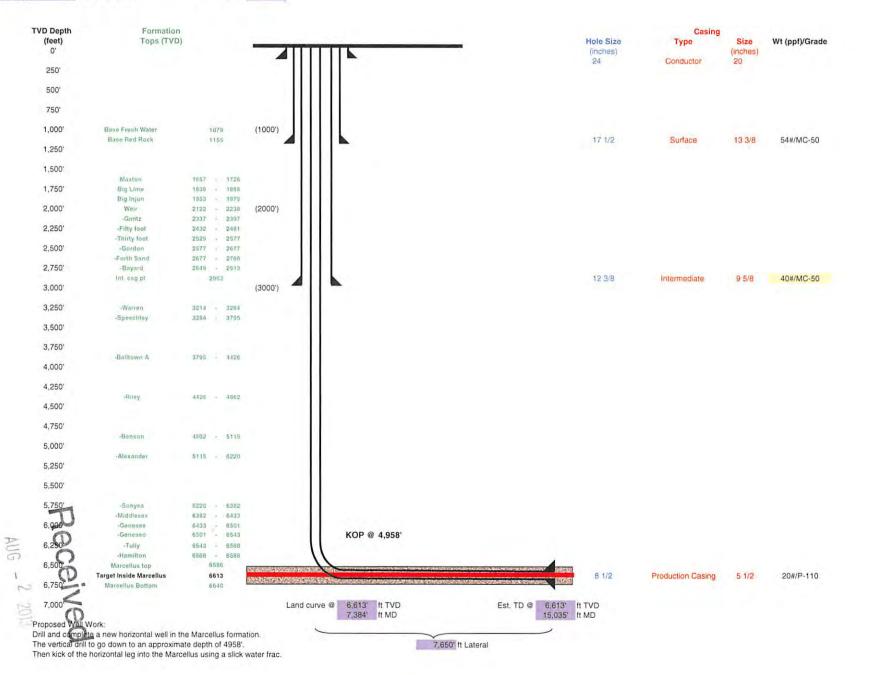

Office of Oil and Gas
WV Dept. of Environmental Protection

17-06329

Well Schematic EQT Production

7,000' —

513140 (OXF156H3) Doddridge West Virgina Elevation KB: Well Name Target
Prospect
Azimuth
Vertical Section 0' -- 0' 7 Hole Size 24" - 20" Conductor at 40' Bit Size 17.5" 500' -- 500' 1,000' — 1,079' Fresh Water Base 1,155' Base Red Rock - 1,000' TOC @ Surface 13 3/8", MC-50, 54.5# @ 1,179' ft MD Bit Size 12.375* 1,500' -**—** 1,500° 1,657' Maxton 1,838' Big Lime 2,000' — 1,953' Big Injun - 2,000 2.122' Weir 2,122' Werr 2,337' -Gantz 2,432' -Fifty foot 2,529' -Thirty foot 2,577' -Gordon 2,677' -Forth Sand - 2.500 2,849' -Bayard 3,000' — 2,963' Int. csg pt TOC @ Surface 9 5/8*, MC-50, 40# @ 2,963' ft MD -3,000'Bit Size 8.5" 3,214' -Warren 3,284' -Speechley 3,500' — **—** 3,500° 3,795' -Balltown A 4,000' — **-** 4,000° 4,426' -Riley 4,500' -**-** 4,500° 4,862' -Benson 5,000' -- 5,000 5,115' -Alexander 5,500' — - 5,500 6,000' — 6,220' -Sonyea - 6.000 6,382 -Middlesex KOP = 4,958' ft MD 6,433' -Genesee 6,501' -Geneseo 10 Deg DLS 7,384' ft MD 6,543 -Tully 6,568' -Hamilton 6,613' ft TVD 6,500' -— 6.500° 6,586 -Marcellus 5 1/2", P-110, 20# 15,035' ft MD 6,640' Onondaga 6,613' ft TVD

— 7,000'



AUG - 2 2000

WW-9 (5/13)

	Page	1	of	2
API No. 47				0
Operator's V	Vell No.	•		513140

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS

Fluids/Cuttings Disposal & Reclamation Plan

Operator Name	EQT Production	n Co.	OP Code	
Watershed (HUC10)_	Left Fork Arnolds Cr	Be k	Quadrangle	Oxford 7.5'
Elevation	1,203' County	yDoddrid		
Do you anticipate using	more than 5,000 bbls of	water to complet	e the proposed wel	
	rill cuttings: Yes:			
	scribe anticipated pit waste:			
Will a synthetic	liner be used in the pit?	Yes	No X If	so, what ml.? 60
Proposed Disp	oosal Method For Treated	Pit Wastes:		
·	Land Application			
	Underground Injecti Reuse (at API Nun		rmit Number	0014, 8462, 4037
	Off Site Disposal		/W-9 for disposal lo	ocation)
	Other (Explain			
Will closed loop system	be used ? YFS			
Drilling medium anticin	pated for this well? Air, free	shwater oil base	od etc.	and water by
If oil based,	what type? Synthetic, petro	pieum, etc	o, etc. Air a	and water based mud
Additives to be used in o	1 ****		ntrol Lime Chloride Sata Rate	Filtration Control,
	Dettoo	culant, Lubricant, Deterne	nt. Defosming Water Shall V.	Cido COLTENT
Drill cuttings disposal n	nethod? Leave in pit, landf	ill, removed offsi	te, etc.	Landfill
If left in pit and	l plan to solidify what medium wi	il be used? (Cemeni	, Line, sawdust)	n/a
Landfill or offs	ite name/permit number?		See Attached	
Certify that Lunderston	and apply agree to the terms and			
on August 1, 2005, by the Office	d and agree to the terms and co ce of Oil and Gas of the West Vi	nditions of the GEN	ERAL WATER POLLUT	ION PERMIT issued
rovisions of the permit are en	forceable by law. Violations of a	ny term or condition	crivironmental Protecti of the general permit an	on. I understand that the
regulation can lead to entor	cement action.			
I certify under penalty of	f law that I have personally exam	ined and am familia	r with the information su	bmitted on this
e information, I believe that the	ments thereto and that, based or he information is true, accurate,	my inquiry of those	individuals immediately	responsible for obtaining
ubmitting false information, in	cluding the possibility of fine or in	and complete. I am : mprisonment.	aware that there are sign	nificant penalties for
			11	
Company Official Signatu Company Official (Typed		wo	11/	
Company Official Title	Name)		poria J. Roark	
, , , , , , , , , , , , , , , , , , , ,		Penniun	g Supervisor	
			g Ouporvisor	
ubscribed and sworn be	fore me this	day of	JULY	, 20 , 3
	1			
y commission expires	Jan 6	laslance	2	Notary Public
		13/1/2/18	3000	OFFICIAL SEAL
				Notary Public, State Of West Virgini NICHOLAS L. BUMGARDNER Rt. 1 Box 4 Liberty, WV 25124 Ly Commission Expires June 27, 20

Office of Oil & 2013

SEP 03 2013

WV Department of Environmental Protection

, MM-8

			Operator	's Well No.		513140
Proposed Revegetat	ion Treatment: Acres Disturb	ed37.40	3	Prevegetation	n pH	6.6
Lime	3 Tons/acre	or to correct to pH		6.5	•	
Fertilizer (10	0-20-20 or equivalent)	1/3ib:	s/acre (500	lbs minimum)		
Mulch	2	Tons/	acre/			
		Seed Mixtures	S			
	Area i			Aron II		
Seed Type	lbs/acre	Se	ed Type	Area II	lbs/acre	
KY-31	40		d Grass		15	
Alsike Clover	5	Alsike	Clover		5	
Annual Rye	15	_				
	f involved 7.5' topographic sh					
Comments: Pr	Douglas Neu coed + Mulc.	h Insta	// E	75 to	wi)
itle: Oil + ba	s insperta	_ Date: 7	8 -16 ·	2013		
ield Reviewed?				\		

Office of Oil & Gas22/2013

Office of Oil & Gas22/2013

SEP 0 3 2013

W Department of Protection Environment of Environment of

EQT Production Water plan Offsite disposals for Marcellus wells

CWS TRUCKING INC.

P.O. Box 391 Williamstown, WV 26187 740-516-3586 Noble County/Noble Township Permit # 3390

LAD LIQUID ASSETS DISPOSAL INC.

226 Rankin Road Washington, PA 15301 724-350-2760 724-222-6080 724-229-7034 fax Ohio County/Wheeling Permit # USEPA WV 0014

TRI COUNTY WASTE WATER MANAGEMENT, INC.

1487 Toms Run Road Holbrook, PA 15341 724-627-7178 Plant 724-499-5647 Office Greene County/Waynesburg Permit # TC-1009

Waste Management - Meadowfill Landfill

Rt. 2, Box 68 Dawson Drive Bridgeport, WV 26330 304-326-6027 Permit #SWF-1032-98 Approval #100785WV

Waste Management - Northwestern Landfill

512 E. Dry Road Parkersburg, WV 26104 304-428-0602 Permit #SWF-1025 WV-0109400 Approval #100833WV

BROAD STREET ENERGY LLC

37 West Broad Street Suite 1100 Columbus, Ohio 43215 740-516-5381 Washington County/Belpre Twp. Permit # 8462

TRIAD ENERGY

P.O. Box 430 Reno, OH 45773 740-516-6021 Well 740-374-2940 Reno Office Jennifer Nobel County/Jackson Township Permit # 4037

KING EXCAVATING CO.

Advanced Waste Services 101 River Park Drive New Castle, Pa. 16101 Facility Permit# PAR000029132

11/22/2013

Received

AUC - 2 200



Site Specific Safety and Environmental Plan For

EQT OXF 156 Pad

Doddridge County, WV

	For Wells: 513140	
Vid JL	Date Prepared:	July 31, 2013 Douglas Newlan
Docm Hing Sporisor fille 7-31-13 Date		WV Oil and Gas Inspector Bill Das insplictor Title 11-6-2013 Date

11/22/2013

RECEIVED
Office of Oil and Gas

NOV 1 2 2013

WV Department of

west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01493

API/ID Number:

047-017-06329

Operator:

EQT Production Company

513140 (OXF156H3)

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- · Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED NOV 0 1 2013

WMP-01493

API Number:

047-017-06329

Operator:

EQT Production Company

513140 (OXF156H3)

Stream/River

Ohio River @ Westbrook Trucking Site Source

Pleasants

Owner:

Stephen R. and Janet Sue

Westbrook

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

9/15/2013

9/15/2014

12,500,000

39.384455

-81.25645

☐ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

1,260

Min. Gauge Reading (cfs):

6.468.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Ohio River @ Select Energy

Pleasants

Owner:

Select Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.346473

-81.338727

9/15/2013

9/15/2014

12,500,000

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

✓ Regulated Stream?

1,500

Ohio River Min. Flow

Min. Gauge Reading (cfs):

Ref. Gauge ID:

7,216.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Middle Island Creek @ Travis Truck Pad

Doddridge

Owner:

Michael J. Travis

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

39.308545

Intake Latitude: Intake Longitude: -80.781102

9/15/2013

☐ Regulated Stream?

Max. Pump rate (gpm):

9/15/2014

12,500,000

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

4,200

Min. Gauge Reading (cfs):

Ref. Gauge ID:

72.16

Min. Passby (cfs)

28.33

Middle Island Creek @ Rock Run Doddridge Owner: Source Max. daily purchase (gal) **End Date** Total Volume (gal) Intake Latitude: Intake Longitude: Start Date 9/15/2013 9/15/2014 12,500,000 39.298763 -80.760682 ☐ Regulated Stream? Ref. Gauge ID: MIDDLE ISLAND CREEK AT LITTLE, WV 3114500 Max. Pump rate (gpm): Min. Gauge Reading (cfs): 62.89 Min. Passby (cfs) 26.43 1,680 **DEP Comments:** Ellen L. Barnes Middle Island Creek @ Barnes Withdrawal Site Doddridge Owner: Source **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date -80.75694 9/15/2013 9/15/2014 12,500,000 39.29958 ☐ Regulated Stream? Ref. Gauge ID: 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV 26.39 Min. Gauge Reading (cfs): 59.06 Min. Passby (cfs) Max. Pump rate (gpm): 1,260 **DEP Comments:** Meathouse Fork @ Spiker Withdrawal Site Doddridge Owner: John & Sue Spiker Source Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date **End Date** Total Volume (gal) -80.72489 9/15/2013 9/15/2014 12,500,000 39.2591 ☐ Regulated Stream? MIDDLE ISLAND CREEK AT LITTLE, WV Ref. Gauge ID: 3114500 9.26 Max. Pump rate (gpm): 1,260 Min. Gauge Reading (cfs): 74.77 Min. Passby (cfs)

Source South Fork of Hughes River @ Upper Wizard Run Doddridge Owner: I.L. Morris Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date **End Date** 9/15/2013 12,500,000 39.189998 -80.79511 9/15/2014 ☐ Regulated Stream? **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ Ref. Gauge ID: 3155220 Max. Pump rate (gpm): Min. Gauge Reading (cfs): 33.12 Min. Passby (cfs) 0.64 1.260 **DEP Comments:** South Fork of Hughes River @ Harmony Road Doddridge Source Owner: I.L. Morris Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date **End Date** 9/15/2013 9/15/2014 12,500,000 39.1962 -80.81442 Regulated Stream? Ref. Gauge ID: **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ 3155220 Max. Pump rate (gpm): Min. Gauge Reading (cfs): 33.12 Min. Passby (cfs) 0.98 1,260 **DEP Comments:** Straight Fork @ Maxson Withdrawal Site Ritchie Owner: **Douglas L. Maxson** Source Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: -80.848587 9/15/2013 9/15/2014 12,500,000 39.144317 Regulated Stream? Ref. Gauge ID: 3155220 **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ 2.45 Min. Gauge Reading (cfs): 36.74 Min. Passby (cfs) Max. Pump rate (gpm): 1.680

Source

Middle Fork @ Janscheck Withdrawal Site

Doddridge

Owner:

Mary Jo Janscheck

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

intake Latitude.

Intake Latitude: Intake Longitude:

9/15/2013

9/15/2014

12,500,000

39.151388

-80.812222

☐ Regulated Stream?

Ref. Gauge ID:

3155220

SOUTH FORK HUGHES RIVER BELOW MACFARLAN, W\

Max. Pump rate (gpm):

840

Min. Gauge Reading (cfs):

35.81


Min. Passby (cfs)

0.86

Source Detail

WMP-01493	API/ID Number: 047-017 513140 (OXF156H3		duction Company
Source ID: 26231 Source Name	Ohio River @ Westbrook Trucking Site Stephen R. and Janet Sue Westbrook	Source Latitude: Source Longitude:	
☐ Trout Stream? ☐ Tie	25000 County: Pleasants ussel Stream? er 3? River Min. Flow		9/15/2014 12,500,000
Reference Gaug 99999 Drainage Area (sq. mi.)	Ohio River Station: Willow Islan 25,000.00	nd Lock & Dam Gauge Threshold (cf	fs): 6468

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00	2	
2	49,200.00	+	G.
3	65,700.00	-	
4	56,100.00	-	
5	38,700.00	2.1	
6	24,300.00	XI.	
7	16,000.00	-/	
8	13,400.00	-	*
9	12,800.00		1.
10	15,500.00	-	1.12
11	26,300.00	4.1	4
12	41,300.00	-1	1.4

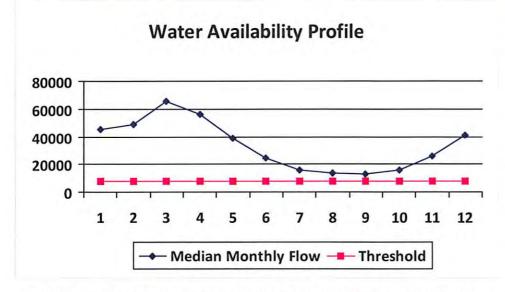


Water	Availability	Assessment	of	Location

0.00
0.00
2.81
0.00
1,617.00

WMP-01493 API/ID Number: 047-017-06329 **EQT Production Company** Operator: 513140 (OXF156H3) Source Latitude: 39.346473 26232 Ohio River @ Select Energy Source ID: Source Name Select Energy Source Longitude: -81.338727 5030201 HUC-8 Code: 9/15/2013 Anticipated withdrawal start date: 25000 **Pleasants** Drainage Area (sq. mi.): County: 9/15/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 12,500,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,500 Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 9999998 Reference Gaug Ohio River Station: Racine Dam 25,000.00 7216 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	50,956.00		
2	54,858.00		-
3	73,256.00	-	1.5
4	62,552.00		
5	43,151.00	-	1.2
6	27,095.00		11.27
7	17,840.00	-	12
8	14,941.00	1,8	1.5
9	14,272.00		1.0
10	17,283.00		(4)
11	29,325.00	1.00	
12	46,050.00	9	

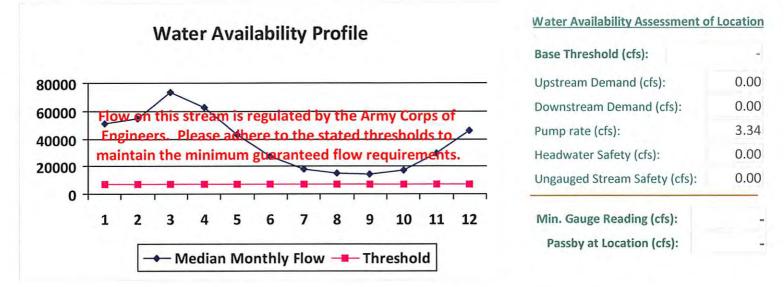



WMP-01493 API/ID Number: 047-017-06329 Operator: **EQT Production Company** 513140 (OXF156H3) Middle Island Creek @ Travis Truck Pad Source Latitude: 39.308545 26233 Source Name Source ID: Michael J. Travis Source Longitude: -80.781102 5030201 HUC-8 Code: Anticipated withdrawal start date: 9/15/2013 Doddridge Drainage Area (sq. mi.): 122.83 County: Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? 12,500,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 4,200 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: 10 Proximate PSD? West Union Municipal Water Max. Truck pump rate (gpm) 420 Gauged Stream? MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug 3114500 45 458.00 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	131.72	30.99	101.10
2	165.69	30.99	135.07
3	185.40	30.99	154.78
4	137.68	30.99	107.05
5	72.63	30.99	42.00
6	25.36	30.99	-5.26
7	14.35	30.99	-16.27
8	11.82	30.99	-18.81
9	6.05	30.99	-24.57
10	7.60	30.99	-23.02
11	37.14	30.99	6.51
12	90.73	30.99	60.11

Water Availability Profile 200 150 100 50 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Water	Availability	Assessment	of L	ocation

Min. Gauge Reading (cfs): Passby at Location (cfs):	72.16 28.33
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	3.02
Pump rate (cfs):	9.36
Downstream Demand (cfs):	13.24
Upstream Demand (cfs):	6.55
Base Threshold (cfs):	12.07



45


WMP-01493 API/ID Number: 047-017-06329 Operator: **EQT Production Company** 513140 (OXF156H3) Middle Island Creek @ Rock Run Source ID: 26234 Source Latitude: 39.298763 Source Name William Whitehill Source Longitude: -80.760682 5030201 HUC-8 Code: Anticipated withdrawal start date: 9/15/2013 107.35 Doddridge Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 12,500,000 Trout Stream? ☐ Tier 3? 1,680 Max. Pump rate (gpm): Regulated Stream? West Union Municipal Water Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) 420 Gauged Stream? 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	115.12	19.74	95.58
2	144.81	19.74	125.27
3	162.04	19.74	142.50
4	120.33	19.74	100.79
5	63.47	19.74	43.93
6	22.17	19.74	2.63
7	12.54	19.74	-7.00
8	10.33	19.74	-9.21
9	5.29	19.74	-14.25
10	6.65	19.74	-12.89
11	32.46	19.74	12.91
12	79.30	19.74	59.76

Water Availability Profile

458.00

Drainage Area (sq. mi.)

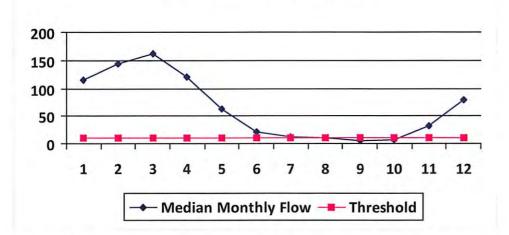

Water Availability Assessment of Location

Gauge Threshold (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):	62.80 26.42
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	2.64
Pump rate (cfs):	3.74
Downstream Demand (cfs):	13.24
Upstream Demand (cfs):	2.81
Base Threshold (cfs):	10.55

WMP-01493 API/ID Number: 047-017-06329 **EQT Production Company** Operator: 513140 (OXF156H3) Middle Island Creek @ Barnes Withdrawal Site Source ID: 26235 Source Name Source Latitude: 39.29958 Ellen L. Barnes Source Longitude: -80.75694 5030201 HUC-8 Code: Anticipated withdrawal start date: 9/15/2013 107.08 Doddridge Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? 12,500,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? West Union Max. Truck pump rate (gpm) Gauged Stream? 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug 458.00 45 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	114.83	18.59	96.42
2	144.45	18.59	126.03
3	161.63	18.59	143,21
4	120.02	18.59	101.61
5	63.31	18.59	44.90
6	22.11	18.59	3.69
7	12.51	18.59	-5.91
8	10.30	18.59	-8.12
9	5.28	18.59	-13.14
10	6.63	18.59	-11.79
11	32.37	18.59	13.96
12	79.10	18.59	60.68

Water Availability Profile 200 150 100 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Base Threshold (cfs):	10.52	
Upstream Demand (cfs):	0.00	
Downstream Demand (cfs):	13.24	
Pump rate (cfs):	2.81	
Headwater Safety (cfs):	2.63	
Ungauged Stream Safety (cfs):	2.63	

Min. Gauge Reading (cfs):

Passby at Location (cfs):

Water Availability Assessment of Location

70.31


29.02

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01493 API/ID Number: 047-017-06329 Operator: **EQT Production Company** 513140 (OXF156H3) Source ID: 26236 Meathouse Fork @ Spiker Withdrawal Site Source Latitude: 39.2591 Source Name John & Sue Spiker Source Longitude: -80.72489 5030201 HUC-8 Code: 9/15/2013 Anticipated withdrawal start date: Doddridge Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? 12,500,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) 0 Gauged Stream? 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug 458.00 Gauge Threshold (cfs): 45 Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	67.29	16.52	51.09
2	84.65	16.52	68.45
3	94.72	16.52	78.52
4	70.34	16.52	54.14
5	37.10	16.52	20.90
6	12.96	16.52	-3.24
7	7.33	16.52	-8.87
8	6.04	16.52	-10.16
9	3.09	16.52	-13.11
10	3.88	16.52	-12.32
11	18.97	16.52	2.77
12	46.35	16.52	30.15

Water Availability Profile

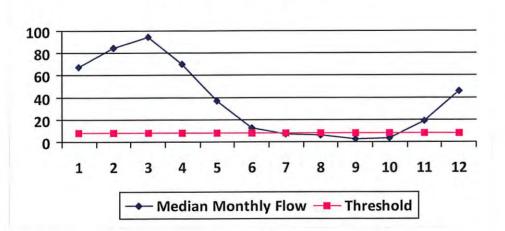

Water Availability Assessment of Location

Base Threshold (cfs):	6.17
Upstream Demand (cfs):	4.46
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.81
Headwater Safety (cfs):	1.54
Ungauged Stream Safety (cfs):	1.54
Min. Gauge Reading (cfs):	74.77
Passby at Location (cfs):	9.25

WMP-01493 API/ID Number: 047-017-06329 Operator: EQT Production Company

513140 (OXF156H3)


South Fork of Hughes River @ Upper Wizard Run 26237 Source Latitude: 39.189998 Source ID: Source Name I.L. Morris Source Longitude: -80.79511 HUC-8 Code: 5030203 9/15/2013 Anticipated withdrawal start date: Drainage Area (sq. mi.): 5.33 Doddridge County: Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 12,500,000 Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Max. Truck pump rate (gpm) Gauged Stream?

Reference Gaug 3155220 SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV

Drainage Area (sq. mi.) 229.00 Gauge Threshold (cfs): 22

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	14.97	6.26	8.79
2	19.52	6.26	13.33
3	21.37	6.26	15.19
4	12.08	6.26	5.90
5	8.48	6.26	2.29
6	4.56	6.26	-1.63
7	2.26	6.26	-3.93
8	1.31	6.26	-4.88
9	1.57	6.26	-4.62
10	1.70	6.26	-4.48
11	5.09	6.26	-1.09
12	10.51	6.26	4.32

Water Availability Profile

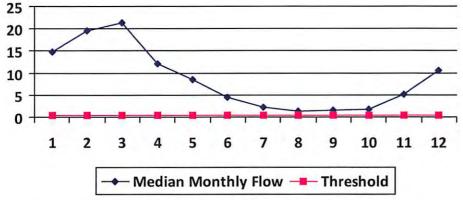


Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	33.12 0.64
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.13
Pump rate (cfs):	2.81
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	2.81
Base Threshold (cfs):	0.51

047-017-06329 WMP-01493 API/ID Number: Operator: **EQT Production Company** 513140 (OXF156H3) South Fork of Hughes River @ Harmony Road 26238 Source Latitude: 39.1962 Source ID: Source Name I.L. Morris Source Longitude: -80.81442 5030203 HUC-8 Code: 9/15/2013 Anticipated withdrawal start date: Doddridge Drainage Area (sq. mi.): County: 9/15/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 12,500,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 3155220 SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV Reference Gaug 229.00 22 Drainage Area (sq. mi.) Gauge Threshold (cfs):

<u>Month</u>	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	22.75	6.59	16.28
2	29.66	6.59	23.19
3	32.48	6.59	26.01
4	18.36	6.59	11.89
5	12.88	6.59	6.41
6	6.92	6.59	0.45
7	3.43	6.59	-3.04
8	1.98	6.59	-4.49
9	2.38	6.59	-4.09
10	2.59	6.59	-3.88
11	7.74	6.59	1.27
12	15.97	6.59	9.50

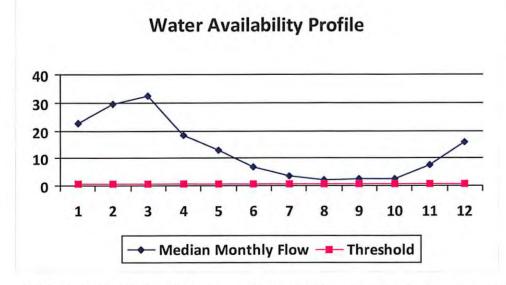

Min. Gauge Reading (cfs):	33.12
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.19
Pump rate (cfs):	2.81
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	2.81
Base Threshold (cfs):	0.78

Passby at Location (cfs):

Water Availability Assessment of Location

0.97

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



WMP-01493 API/ID Number: 047-017-06329 Operator: **EQT Production Company** 513140 (OXF156H3) Straight Fork @ Maxson Withdrawal Site Source ID: 26239 Source Name Source Latitude: 39.144317 Douglas L. Maxson Source Longitude: -80.848587 5030203 HUC-8 Code: Anticipated withdrawal start date: 9/15/2013 Ritchie Drainage Area (sq. mi.): 16.99 County: 9/15/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 12,500,000 Trout Stream? ☐ Tier 3? 1,680 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? 420 Max. Truck pump rate (gpm) Gauged Stream? 3155220 SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV Reference Gaug 229.00 22 Drainage Area (sq. mi.) Gauge Threshold (cfs):

<u>Month</u>	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	47.72	6.19	41.62
2	62.22	6.19	56.12
3	68.13	6.19	62.04
4	38.52	6.19	32.42
5	27.03	6.19	20.93
6	14.52	6.19	8.42
7	7.20	6.19	1.10
8	4.16	6.19	-1.94
9	5.00	6.19	-1.10
10	5.43	6.19	-0.67
11	16.23	6.19	10.13
12	33.50	6.19	27.40

Water Availability Profile 80 60 40 20 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Min. Gauge Reading (cfs): Passby at Location (cfs):	36.74
Ungauged Stream Safety (cfs):	0.41
Headwater Safety (cfs):	0.41
Pump rate (cfs):	3.74
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	1.63


[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

22

Gauge Threshold (cfs):

WMP-01493 API/ID Number: 047-017-06329 Operator: **EQT Production Company** 513140 (OXF156H3) 26240 Middle Fork @ Janscheck Withdrawal Site Source Latitude: 39.151388 Source ID: Source Name Mary Jo Janscheck Source Longitude: -80.812222 5030203 HUC-8 Code: Anticipated withdrawal start date: 9/15/2013 5.92 Doddridge Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? 12,500,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 840 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? Reference Gaug 3155220 SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	16.63	2.72	14.03	
2	21.68	2.72	19.08	
3	23.74	2.72	21.14	
4	13.42	2.72	10.83	
5	9.42	2.72	6.82	
6	5.06	2.72	2.46	
7	2.51	2.72	-0.09	
8	1.45	2.72	-1.15	
9	1.74	2.72	-0.85	
10	1.89	2.72	-0.70	
11	5.66	2.72	3.06	
12	11.67	2.72	9.08	

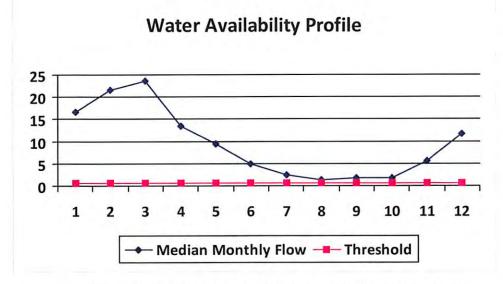

229.00

Drainage Area (sq. mi.)

Min. Gauge Reading (cfs): Passby at Location (cfs):	34.87 0.85
Bain Cours Booding (sty)	24.07
Ungauged Stream Safety (cfs):	0.14
Headwater Safety (cfs):	0.14
Pump rate (cfs):	1.87
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	0.57

west virginia department of environmental protection



Water Management Plan: **Secondary Water Sources**



WMP-01493

API/ID Number

047-017-06329

Operator:

EQT Production Company

513140 (OXF156H3)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Ground Water

Source ID: 26241 Source Name

Groundwater Well TW#1

Source start date:

9/15/2013

Source end date:

9/15/2014

Source Lat:

39.56059

Source Long:

-80.56027

County

Wetzel

Max. Daily Purchase (gal)

Total Volume from Source (gal):

12,500,000

WMP-01493

API/ID Number

047-017-06329

Operator:

EQT Production Company

513140 (OXF156H3)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 26242 Source Name Pennsboro Lake

Source start date:

9/15/2013 9/15/2014

Source end date:

Source Lat: 39.281689 Source Long: -80.925526 County Ritchie

Max. Daily Purchase (gal) Total Volume from Source (gal): 12,500,000

WMP-01493

API/ID Number:

047-017-06329

Operator:

513140 (OXF156H3)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable). DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Multi-site impoundment

Source ID: 26243 Source Name

Davies Centralized Freshwater Impoundment

Source start date:

9/15/2013

Source end date:

9/15/2014

Source Lat:

39.269635

Source Long:

-80.77711

County

Doddridge

Max. Daily Purchase (gal)

Total Volume from Source (gal):

12.500.000

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Source ID: 27401 Source Name

OXF149 Tank Pad A

Source start date:

9/15/2013

Source end date:

9/15/2014

Source Lat:

39.221932

Source Long:

-80.799873

County

Doddridge

Reference: WMP-1083

Max. Daily Purchase (gal)

Total Volume from Source (gal):

12,500,000

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-1532

WMP-01493

API/ID Number

047-017-06329

Operator:

EQT Production Company

513140 (OXF156H3)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 27402 Source Name

OXF149 Tank Pad B

Source start date:

9/15/2003

Source end date:

9/15/2014

Source Lat:

39.221733

Source Long:

-80.798991 County **Doddridge**

Max. Daily Purchase (gal)

Total Volume from Source (gal):

12,500,000

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-1533

Recycled Frac Water

Source ID: 26244 Source Name

Various

Source start date:

9/15/2013

Source end date:

9/15/2014

Source Lat:

Source Long:

County

Max. Daily Purchase (gal)

Total Volume from Source (gal):

12,500,000

