

## west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

January 31, 2014

## WELL WORK PERMIT

### Horizontal 6A Well

This permit, API Well Number: 47-1706385, issued to EQT PRODUCTION COMPANY, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: 514663

Farm Name: JANE HARDIN TRUSTEE/ MARY

API Well Number: 47-1706385

Permit Type: Horizontal 6A Well

Date Issued: 01/31/2014

Promoting a healthy environment.

## **PERMIT CONDITIONS**

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

### **CONDITIONS**

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

4701706385

Page 1 of 3

9/23

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS W.VA. CODE §22-6A - WELL WORK PERMIT APPLICATION

) Well Operator:	EQT Pro	duction Company			017	8	671
				Operator ID	County	District	Quadrangle
2) Operator's Well	Number: _		514663		_Well Pad Name		WEU51
Elevation, curren	t ground: _	1,223.0	_ Eleva	ition, proposed p	ost-construction:	1,208	3.0
.) Well Type: (a) G	ias	• Oil	Ur	nderground Stora	ige		
C	ther						
(b)	) If Gas:	Shallow	-	Deep			DCN 2013
) Existing Pad? Yo	es or No:	No				•	, ,
, .		n(s), Depth(s), Ant cellus at a depth of 66					ssure of 4500 PSI
\ Dana and Tatal \	Martinal Da				6.017		
) Proposed Total					6,817		
•		Depth:			Onondaga 12,319		
<ul><li>) Proposed Total I</li><li>0) Approximate Fr</li></ul>					171, 176, 207, &	334	
1) Method to Dete					By offset well		
2) Approximate S				No	one Reported		
3) Approximate C					177 & 294		
		ssible Void (coal m	ine karst of	ther):		None rep	orted
, ,,	•	ation contain coal					
,		ne? If so, indicate				None Rep	orted
6) Describe propo		•		-	rcellus formation. Th		
-,		the Onondaga not mo	·				
leg into the marce							
log into the marco	ildo dolling a c						
7) Describe fractu	rina/stimul	ating methods in d	letail:				
•	-	accordance with state r		water recycled from	previously fractured	wells and obtain	ned from
		xed with sand and a sr					
		ducer, biocide, and sca					
		Sand sizes vary from 1					
		, including roads,				± 5	
,		ell pad only, less a				± 11.5	

<u>?</u> 0)							
TYPE	<u>Size</u>	<u>New</u>	Grade	Weight per	FOOTAGE:	INTERVALS:	CEMENT:
		<u>or</u>	!	<u>ft.</u>	for Drilling	Left in Well	Fill- up (Cu.Ft.)
		<u>Used</u>					
Conductor	24	New	MC-50	81	40	40	38 - CTS
resh Water	17 1/2	New	MC-50	50	434	434	396 - CTS
Coal	-	-	-	<u>-</u>	-	<u>-</u>	-
ntermediate	9 5/8	New	MC-50	40	5,322	5,322	2110 - CTS
roduction	5 1/2	New	P-110	20	12,319	12,319	See Note 1
ubing	2 3/8		J-55	4.6			May not be run, if run will be set 100' less than TD
inore							

**CASING AND TUBING PROGRAM** 

YPE	<u>Size</u>	<u>Wellbore</u> <u>Diameter</u>	<u>Wall</u> <u>Thickness</u>	<u>Burst</u> <u>Pressure</u>	<u>Cement</u> <u>Type</u>	Cement Yield
onductor	24	30	0.635	-	Construction	1.18
resh Water	17 1/2	13 3/8	0.38	2,480	1	1.21
oal	-	-	-	-	-	-
ntermediate	9 5/8	12 3/8	0.395	3,590	1	1.21
roduction	5 1/2	8 1/2	0.361	12,640	•	1.27/1.86
ubing						
iners						

<u>Packers</u>

DCN 10-23-2013

ind:	N/A		
izes:	N/A		
epths Set:	N/A		

ote 1: EQT plans to bring the TOC on the production casing cement job 1,000' above kick off point, which is at ast 500' above the shallowest production zone, to avoid communication.

Page 2 of 3

RECEIVED
Office of Oil and Gas
RECEIVED
Office Office)

WV Depath อัดเรียง Environmental Protection WV Department of Environmental Protection

21) Describe centralizer placement for each casing string.
• Surface: Bow spring centralizers - One at the shoe and one spaced every 500'.
• Intermediate: Bow spring centralizers- One cent at the shoe and one spaced every 500'.
Production: One spaced every 1000' from KOP to Int csg shoe
22) Describe all cement additives associated with each cement type.  Surface (Type 1 Cement): 0-3% Calcium Chloride
Used to speed the setting of cement slurries.
0.4% flake. Loss Circulation Material (LCM) is used to combat the loss of the cement slurry to a thief zone.
Intermediate (Type 1 Cement): 0-3% Calcium Chloride. Salt is used in shallow, low temperature formations to speed the setting of cement
slurries. 0.4% flake. Loss Circulation Material (LCM) is used to combat the loss of whole drilling fluid or cement slurry (not filtrate)
to a thief zone.
Production:
Lead (Type 1 Cement): 0.2-0.7% Lignosulfonate (Retarder). Lengthens thickening time.
0.3% CFR (dispersant). Makes cement easier to mix.
Tail (Type H Cement): 0.25-0.40% Lignosulfonate (Retarder). Lengthens thickening time.
0.2-0.3% CFR (dispersant). This is to make the cement easier to mix.
60 % Calcuim Carbonate. Acid solubility.
0.4-0.6% Halad (fluid loss). Reduces amount of water lost to formation.
23) Proposed borehole conditioning procedures. <u>Surface</u> : Circulate hole clean (Approximately 30-45 minutes) rotating & reciprocating
one full joint until cuttings diminish at surface. When cuttings returning to surface diminish, continue to circulate an additional 5
minutes. To ensure that there is no fill, short trip two stands with no circulation. If there is fill, bring compressors back on
and circulate hole clean. A constant rate of higher than expected cuttings volume likely indicates washouts that will not clean up.
Intermediate: Circulate hole clean (Approximately 30-45 minutes) rotating & reciprocating one full joint until cuttings diminish at
surface. When cuttings returning to surface diminish, continue to circulate an additional 5 minutes. If foam drilling, to enhance

<u>Production:</u> Pump marker sweep with nut plug to determine actual hole washout. Calculate a gauge holes bottoms up volume.

hole cleaning use a soap sweep or increase injection rate & foam concentration.

Perform a cleanup cycle by pumping 3-5 bottoms up or until the shakers are clean. Check volume of cuttings coming across

the shakers every 15 minutes.

\*Note: Attach additional sheets as needed.

Page 3 of 3




7,000' —

514663 (WEU51H3) Doddridge West Virgina Elevation KB: Well Name Target
Prospect
Azimuth
Vertical Section County State 0' -7 Hole Size 24" - 20" Conductor at 40' Δ Bit Size 17.5" TOC @ Surface 13 3/8", MC-50, 54.5# @ 434" ft MD 334' Fresh Water Base - 500' 500' -Bit Size 12.375" - 1,000 1,000' -1,164' Base Red Rock 1,500' — **—** 1,500' 2,000' — 1,912' Big Lime - 2,000 2,209' Weir 2,500' — 2,422' -Gantz 2,502' -Fifty foot - 2.500 2,616' -Thirty foot 2,659' -Gordon 2,761' -Forth Sand 3,000' - 2,936' -Bayard - 3,000 3,278' -Warren 3,349' -Speechley 3,500' -- 3,500 3,867' -Balltown A 4,000' — - 4,000' 4,500' — 4,486' -Riley **-** 4,500° 5,000' - 4,920' -Benson - 5,000 5,172' -Alexander TOC @ Surface 9 5/8", MC-50, 40# @ 5,322' ft MD 5,322' Int. csg pt Bit Size 8.5" 5,500' — - 5,500 6,000' — 6,297' -Sonyea - 6,000 KOP = 5,678' ft MD 6,453' -Middlesex 6,507' -Genesee 10 Deg DLS -Genesee 6,578' -Geneseo 6,500' — 6,619' -Tully 6,642' -Hamilton 6,693' ft TVD **—** 6,500° 5 1/2", P-110, 20# 11,819' ft MD 6,693' ft TVD 6,661' -Marcellus 6,717' Onondaga

**—** 7,000°



017

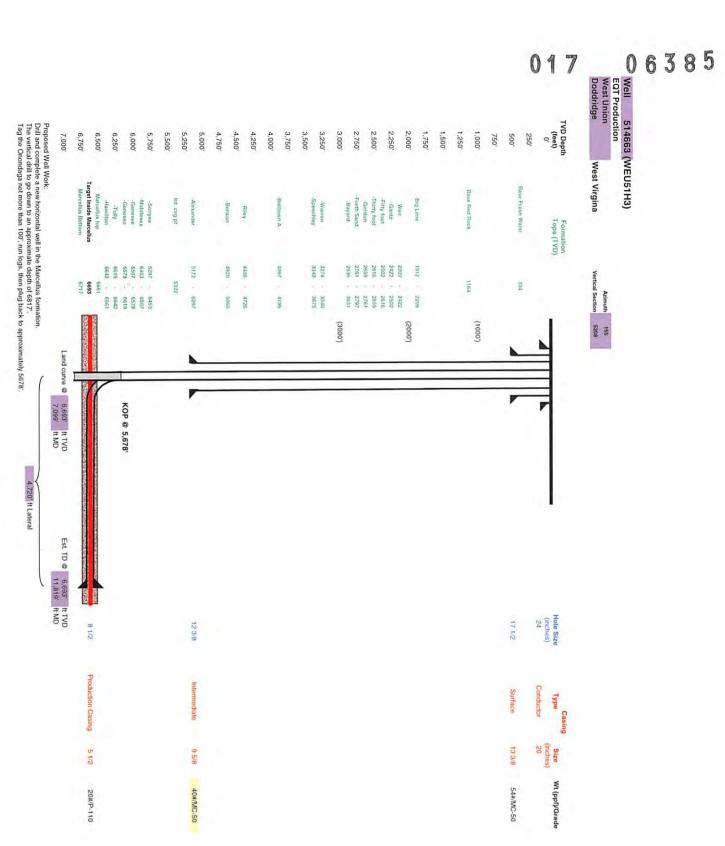

Received

2 =

WW-9 (5/13)

Page	of
API No. 47 017	0
Operator's Well No.	514663

## STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS

Fluids/Cuttings Disposal & Reclamation Plan

Operator Name	WEL	J51		OP Code		
Watershed (HUC10)_	Bluestone C	Creek	Quadra	ingle	West Union 7.5	
Elevation	1208.0 Co	ounty	Doddridge	_ District _	West Unio	<u>n</u>
Do you anticipate using	g more than 5,000 bbl	s of water to	complete the pro	posed well v	vork? Yes <u>x</u>	_No
Will a pit be used for d	rill cuttings: Yes:	No:	X			No 70-23-2017
If so please de	scribe anticipated pit wa	ste:				<del></del>
Will a synthetic	c liner be used in the pit?	? Yes	No	XIf s	so, what ml.?	60
Proposed Dis		on njection I Number sal (Supp		r disposal lo		<u> </u>
Will closed loop system	m be used? YES					
Drilling medium antic	cipated for this well? A	ir, freshwate	r, oil based, etc.	Air a	nd water based m	iud
If oil based	, what type? Synthetic	, petroleum,	etc			
Additives to be used in	* *				Filtration Control,	
		Deflocculant, Lu	bricant, Detergent, Defoamin	ng, Walnut Shell, X-	Cide, SOLTEX Terra	
	I method? Leave in pit				Landfill	
If left in pit a	and plan to solidify what me	dium will be use	ed? (Cement, Line, sa	awdust)	n/a	
Landfill or o	offsite name/permit numb	er?		See Attached	I List	
on August 1, 2005, by the 0 provisions of the permit are or regulation can lead to en	enforceable by law. Violation forcement action. By of law that I have personal achments thereto and that, I at the information is true, as including the possibility of the possibility	West Virginia Dons of any termally examined and based on my incourate, and co	epartment of Enviror or condition of the go and am familiar with the quiry of those individumplete. I am aware the	mental Protect eneral permit and e information suals immediatel nat there are signal.	ion. I understand that ind/or other applicable ubmitted on this y responsible for obtai	law
Subscribed and sworr	n before me this		lay of SEPTEMBE	K	, 20 <u>/ 3</u>	<u> </u>
4					Notary Public	r
My commission expire	es 6/3	7/2018				_

RECEIVED
Office of Oil and Gas

OCT 3 0 2013

WV Department of Environmental Protection

4701706385

vv vv -9		Operat	or's Well No.	514663
Proposed Revegetation	Freatment: Acres Disturbed	± 51.8	Prevegetation pH	6.0
Lime	3 Tons/acre or to co	orrect to pH	6.5	
Fertilizer (10-20	-20 or equivalent)1/3	Blbs/acre (5	00 lbs minimum)	
Mulch	2	Tons/acre		
	S	eed Mixtures		
Are		Seed Type	Area II	/acre
Seed Type (Y-31	lbs/acre 40	Orchard Grass		
Alsike Clover	5	Alsike Clover	5	
Annual Rye	15			
Photocopied section of in	nvolved 7.5' topographic sheet.			
Plan Approved by:	Janglos Newton			
Comments: <u>Pies</u>	regulations	- Install	+ Maintain	EDS
TO WU Dep	regulations			
Title: Oil + Da	s inspector	Date: 10 - 2	23-2013	
Field Poviowed?	Yes	(	) No	

RECEIVED
Office of Oil and Gas

OCT 3 9 2013

WV Department of Environmental Protection

# EQT Production Water plan Offsite disposals for Marcellus wells

## **CWS TRUCKING INC.**

P.O. Box 391 Williamstown, WV 26187 740-516-3586 Noble County/Noble Township Permit # 3390

### LAD LIQUID ASSETS DISPOSAL INC.

226 Rankin Road Washington, PA 15301 724-350-2760 724-222-6080 724-229-7034 fax Ohio County/Wheeling Permit # USEPA WV 0014

## TRI COUNTY WASTE WATER MANAGEMENT, INC.

1487 Toms Run Road Holbrook, PA 15341 724-627-7178 Plant 724-499-5647 Office Greene County/Waynesburg Permit # TC-1009

## Waste Management - Meadowfill Landfill

Rt. 2, Box 68 Dawson Drive Bridgeport, WV 26330 304-326-6027 Permit #SWF-1032-98 Approval #100785WV

## Waste Management - Northwestern Landfill

512 E. Dry Road Parkersburg, WV 26104 304-428-0602 Permit #SWF-1025 WV-0109400 Approval #100833WV

### **BROAD STREET ENERGY LLC**

37 West Broad Street Suite 1100 Columbus, Ohio 43215 740-516-5381 Washington County/Belpre Twp. Permit # 8462

### **TRIAD ENERGY**

P.O. Box 430 Reno, OH 45773 740-516-6021 Well 740-374-2940 Reno Office Jennifer Nobel County/Jackson Township Permit # 4037

## KING EXCAVATING CO.

Advanced Waste Services 101 River Park Drive New Castle, Pa. 16101 Facility Permit# PAR000029132



Office of Oil and Gas
WV Dept. of Environmental Protection



## Site Specific Safety and Environmental Plan For

# EQT WEU 51 Pad

# West Union Doddridge County, WV

_514661	_514662	514663	For Wells: 514664	514665	
-					
	1 11	Date Pre	epared:	July 31, 2013	
EQT Production	1/			WV Oil and Gas In	Temfor—
Teremiter Title 9-20-	/ '	115000		Title 10 -23 - 2	013
Date				Date	

RECEIVED
Office of Oil and Gas

OCT 3 0 2013

WV Department of Environmental Protection

# west virginia department of environmental protection



## Water Management Plan: Primary Water Sources



WMP-01664

API/ID Number:

047-017-06385

Operator:

**EQT Production Company** 

514663 (WEU51H3)

### Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- · Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED DEC 0 6 2013 -

WMP-01664

API Number:

047-017-06385

Operator:

**EQT Production Company** 

514663 (WEU51H3)

Stream/River

Ohio River @ Westbrook Trucking Site Source

**Pleasants** 

Owner:

Stephen R. and Janet Sue

Westbrook

Start Date

**End Date** 

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/1/2013

11/1/2014

7,700,000

39.384455

-81.25645

☐ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID:

9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

1,260

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

**DEP Comments:** 

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Ohio River @ Select Energy

**Pleasants** 

Owner:

**Select Energy** 

Start Date

**End Date** 

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.346473

-81.338727

11/1/2013

11/1/2014

7,700,000

999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

Regulated Stream?

1,500

Ohio River Min. Flow

Min. Gauge Reading (cfs):

Ref. Gauge ID:

7,216.00

Min. Passby (cfs)

**DEP Comments:** 

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Middle Island Creek @ Travis Truck Pad

Doddridge

Owner:

Michael J. Travis

Start Date

**End Date** 

Total Volume (gal)

Max. daily purchase (gal)

39.308545

Intake Latitude: Intake Longitude: -80.781102

11/1/2013

11/1/2014

7,700,000

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

Max. Pump rate (gpm):

Regulated Stream?

4,200

Min. Gauge Reading (cfs):

Ref. Gauge ID:


72.16

Min. Passby (cfs)


28.33

**DEP Comments:** 

Source	Middle Island C	reek @ Ro	ock Run		Doddridge	<b>0 1 7</b> Owner:	06385 William Whitehill
Start Date 11/1/2013	End Date <b>11/1/2014</b>		Total Volume (gal) <b>7,700,000</b>	Max. daily p	ourchase (gal)	Intake Latitude: <b>39.298763</b>	Intake Longitude: -80.760682
☐ Regulated	Stream?		Ref. Gauge II	D: <b>31145</b> 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump i	rate (gpm):	1,680	Min. Gauge Read	ling (cfs):	62.89	Min. Passby (c	fs) <b>26.43</b>
	DEP Commen	ts:					
Source	Meathouse For	k @ Spikeı	r Withdrawal Site		Doddridge	Owner:	John & Sue Spiker
Start Date 11/1/2013	End Date <b>11/1/2014</b>		Total Volume (gal) <b>7,700,000</b>	Max. daily p	ourchase (gal)	Intake Latitude: <b>39.2591</b>	Intake Longitude: -80.72489
☐ Regulated	Stream?		Ref. Gauge II	D: <b>31145</b> 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump ı	rate (gpm):	1,260	Min. Gauge Read	ling (cfs):	74.77	Min. Passby (c	fs) <b>9.26</b>
	DEP Commen	ts:					
Source	Middle Fork @	Maxson W	/ithdrawal Site		Ritchie	Owner: `	Douglas L. Maxson
Start Date 11/1/2013	End Date <b>11/1/2014</b>		Total Volume (gal) <b>7,700,000</b>	Max. daily p	ourchase (gal)	Intake Latitude: <b>39.144183</b>	Intake Longitude: -80.84664
☐ Regulated	Stream?		Ref. Gauge II	D: <b>31552</b>	20 OUTH	FORK HUGHES RIVER BELO	W MACFARLAN, W\
Max. Pump	rate (gpm):	1,680	Min. Gauge Read	ling (cfs):	36.74	Min. Passby (c	fs) <b>2.45</b>
	DEP Commen	ts:					

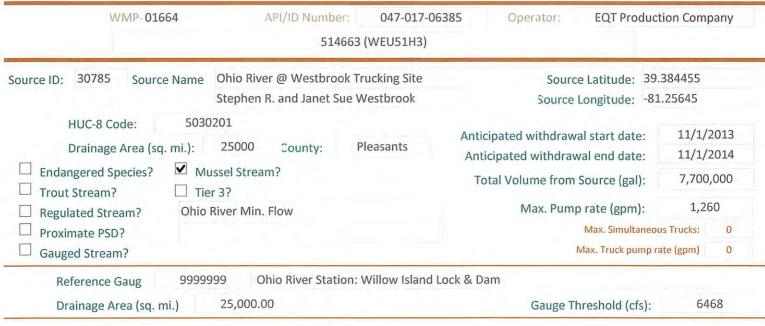

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00	-	-
2	49,200.00	-	4
3	65,700.00	-	14
4	56,100.00		-
5	38,700.00	8	1.0
6	24,300.00	8.1	
7	16,000.00	-	1.4
8	13,400.00	-	1.2
9	12,800.00		
10	15,500.00	-	1,0
11	26,300.00		1
12	41,300.00	4	A.

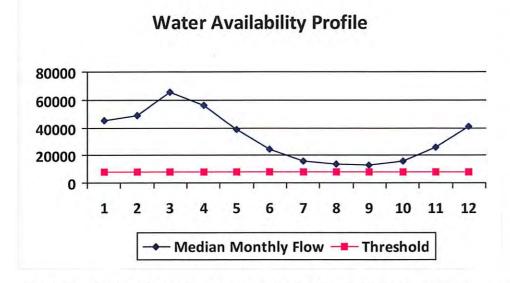

## Water Availability Assessment of Location

Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.81
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	1,617.00
Min. Gauge Reading (cfs):	4.0
Passby at Location (cfs):	

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	50,956.00		1 1
2	54,858.00	-	1.2
3	73,256.00	-	-
4	62,552.00	ωl .	Tu.
5	43,151.00	ė	2.
6	27,095.00		3
7	17,840.00	4.	+
8	14,941.00	-	.2
9	14,272.00	~	
10	17,283.00	+ 1	- 4
11	29,325.00		1-4
12	46,050.00	-	

# Flow on this stream is regulated by the Army Corps of Engineers. Please achere to the stated thresholds to maintain the minimum guaranteed flow requirements.

6

5

**Water Availability Profile** 

# ← Median Monthly Flow ← Threshold

7

8

9

10

11

12

## Water Availability Assessment of Location

Base Threshold (cfs):	O+
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	3.34
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

0

1

2

3

047-017-06385

Operator:

**EQT Production Company** 

514663 (WEU51H3)

Doddridge

30787 Middle Island Creek @ Travis Truck Pad Source ID: Source Name

Source Latitude: 39.308545

Michael J. Travis

Source Longitude: -80.781102

HUC-8 Code:

5030201

Drainage Area (sq. mi.):

WMP-01664

122.83 County:

API/ID Number:

Anticipated withdrawal start date:

11/1/2013

**Endangered Species?** 

Anticipated withdrawal end date:

11/1/2014

✓ Mussel Stream?

7,700,000 Total Volume from Source (gal):

Trout Stream?

☐ Tier 3?

4,200 Max. Pump rate (gpm):

Regulated Stream? Proximate PSD?

West Union Municipal Water

Max. Simultaneous Trucks:

Gauged Stream?

10 Max. Truck pump rate (gpm) 420

Reference Gaug

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

Drainage Area (sq. mi.)


458.00

Gauge Threshold (cfs):

45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	131.72	30.99	101.10
2	165.69	30.99	135.07
3	185.40	30.99	154.78
4	137.68	30.99	107.05
5	72.63	30.99	42.00
6	25.36	30.99	-5.26
7	14.35	30.99	-16.27
8	11.82	30.99	-18.81
9	6.05	30.99	-24.57
10	7.60	30.99	-23.02
11	37.14	30.99	6.51
12	90.73	30.99	60.11

## **Water Availability Profile**

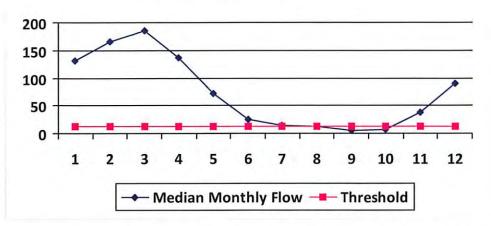

#### Water Availability Assessment of Location

Base Threshold (cfs):	12.07
Upstream Demand (cfs):	6.55
Downstream Demand (cfs):	13.24
Pump rate (cfs):	9.36
Headwater Safety (cfs):	3.02
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	72.16
Passby at Location (cfs):	28.33

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Source De

API/ID Number:

Operator:

**EQT Production Company** 

514663 (WEU51H3)

047-017-06385

Source ID: 30788 Source Name Middle Island Creek @ Rock Run

Source Latitude: 39.298763

William Whitehill

Source Longitude: -80.760682

HUC-8 Code: 5030201

WMP-01664

Anticipated withdrawal start date:

11/1/2013

Drainage Area (sq. mi.):

107.35 County: Doddridge

Anticipated withdrawal end date:

11/1/2014

✓ Endangered Species?

✓ Mussel Stream?

Total Volume from Source (gal):

7,700,000

☐ Trout Stream?

Gauged Stream?

✓ Mussel Stream:

Max. Pump rate (gpm): 1,680

☐ Regulated Stream?

Miles Company

1,000

✓ Proximate PSD?

West Union Municipal Water

Max. Simultaneous Trucks:

Max. Truck pump rate (gpm) 420

Reference Gaug

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

Drainage Area (sq. mi.)


458.00

Gauge Threshold (cfs):

45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	115.12	19.74	95.58
2	144.81	19.74	125.27
3	162.04	19.74	142.50
4	120.33	19.74	100.79
5	63.47	19.74	43.93
6	22.17	19.74	2.63
7	12.54	19.74	-7.00
8	10.33	19.74	-9.21
9	5.29	19.74	-14.25
10	6.65	19.74	-12.89
11	32.46	19.74	12.91
12	79.30	19.74	59.76

## **Water Availability Profile**

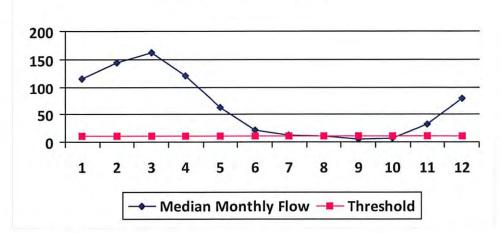

### Water Availability Assessment of Location

10.55 2.81 13.24
13 24
13.27
3.74
2.64
0.00

Passby at Location (cfs): 26.42

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

## Source Detail


WMP-01664 API/ID Number: 047-017-06385 Operator: **EQT Production Company** 514663 (WEU51H3) Meathouse Fork @ Spiker Withdrawal Site Source Latitude: 39.2591 Source ID: 30789 Source Name John & Sue Spiker Source Longitude: -80.72489 5030201 HUC-8 Code: Anticipated withdrawal start date: 11/1/2013 62.75 Doddridge Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 11/1/2014 **Endangered Species?** ✓ Mussel Stream? 7,700,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: 0 Proximate PSD? Max. Truck pump rate (gpm) 0 Gauged Stream? MIDDLE ISLAND CREEK AT LITTLE, WV 3114500

Drainage Area (sq. mi.)	458.00	Gauge Threshold (cfs):	45

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	67.29	16.52	51.09
2	84.65	16.52	68.45
3	94.72	16.52	78.52
4	70.34	16.52	54.14
5	37.10	16.52	20.90
6	12.96	16.52	-3.24
7	7.33	16.52	-8.87
8	6.04	16.52	-10.16
9	3.09	16.52	-13.11
10	3.88	16.52	-12.32
11	18.97	16.52	2.77
12	46.35	16.52	30.15

Reference Gaug

## **Water Availability Profile**

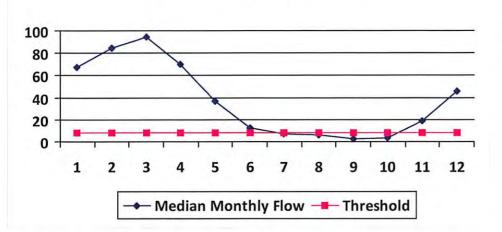

### Water Availability Assessment of Location

Min. Gauge Reading (cfs):  Passby at Location (cfs):	74.77 9.25
Ungauged Stream Safety (cfs):	1.54
Headwater Safety (cfs):	1.54
Pump rate (cfs):	2.81
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	4.46
Base Threshold (cfs):	6.17

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01664 API/ID Number: 047-017-06385 514663 (WEU51H3)

Operator:

**EQT Production Company** 

Source ID: 30790 Middle Fork @ Maxson Withdrawal Site Source Name Douglas L. Maxson

Source Latitude: 39.144183

Source Longitude: -80.84664

HUC-8 Code:

5030203

Drainage Area (sq. mi.):

16.99 County: Anticipated withdrawal start date:

11/1/2013

**Endangered Species?** 

Ritchie

Anticipated withdrawal end date:

11/1/2014

✓ Mussel Stream?

Total Volume from Source (gal):

7,700,000

Trout Stream?

☐ Tier 3?

Max. Pump rate (gpm):

1,680

Regulated Stream?

Proximate PSD? Gauged Stream?

Max. Simultaneous Trucks: Max. Truck pump rate (gpm) 420

Reference Gaug

3155220

SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV

Drainage Area (sq. mi.)


229.00

Gauge Threshold (cfs):

22

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	47.72	6.19	41.62
2	62.22	6.19	56.12
3	68.13	6.19	62.04
4	38.52	6.19	32.42
5	27.03	6.19	20.93
6	14.52	6.19	8.42
7	7.20	6.19	1.10
8	4.16	6.19	-1.94
9	5.00	6.19	-1.10
10	5.43	6.19	-0.67
11	16.23	6.19	10.13
12	33.50	6.19	27.40

## **Water Availability Profile**

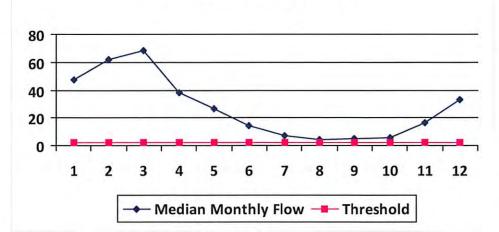

### Water Availability Assessment of Location

Min. Gauge Reading (cfs):  Passby at Location (cfs):	36.74 2.45
Ungauged Stream Safety (cfs):	0.41
Headwater Safety (cfs):	0.41
Pump rate (cfs):	3.74
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	1.63

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



## Water Management Plan: Secondary Water Sources



WMP-01664

API/ID Number

047-017-06385

Operator:

**EQT Production Company** 

514663 (WEU51H3)

## Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

## **Ground Water**

Source ID: 30791 Source Name

Groundwater Well TW#1

Source start date:

11/1/2013

Source end date:

11/1/2014

Source Lat:

39.56059

Source Long:

-80.56027

County

Wetzel

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,700,000

**DEP Comments:** 

WMP-01664

API/ID Number

047-017-06385

Operator:

EQT Production Company

514663 (WEU51H3)

### **Important:**

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

## Lake/Reservior

Source ID: 30792 Source Name Pennsboro Lake

Source start date:

11/1/2013

Source end date:

11/1/2014

Source Lat:

39.281689

Source Long:

-80.925526

County

Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,700,000

**DEP Comments:** 

## Multi-site impoundment

Source ID: 30793 Source Name

**Davies Centralized Freshwater Impoundment** 

Source start date:

11/1/2013

Source end date:

11/1/2014

Source Lat:

39.269635

Source Long:

-80.77711

County

Doddridge

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,700,000

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-1083

WMP-01664

API/ID Number

047-017-06385

Operator:

7 0 6 3 8 EQT Production Company

514663 (WEU51H3)

### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

## Recycled Frac Water

Source ID: 30794 Source Name Various

Source start date:

11/1/2013

Source end date:

11/1/2014

Source Lat:

Source Long:

County

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,700,000

DEP Comments:

