

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

December 30, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-1706418, issued to ANTERO RESOURCES CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: DUFFLEMEYER UNIT 1H

Farm Name: DUFFLEMEYER, MICHAEL B. ,. I

API Well Number: 47-1706418

Permit Type: Horizontal 6A Well

Date Issued: 12/30/2013

Promoting a healthy environment.

API Number: 17-06418

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the easing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved
 water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW-6B (9/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

| 1) Well Opera | tor: Antero | Resources Con | poration | 494488557 | 017-Doddridge | New Milton | New Milton |
|---|------------------|-----------------|-------------|-------------------------|--------------------|-------------------|--|
| 2015 No. 10 10 10 10 10 10 10 10 10 10 10 10 10 | | | | Operator ID | County | District | Quadrangle |
| 2) Operator's | Well Number | : Dufflemeyer | Unit 1H | Well Pad | Name: Snake | Run Pad | |
| 3) Farm Name | Surface Own | ner: Michael D | ufflemeye | er et al Public Roa | d Access: CR | 25 | |
| 4) Elevation, c | current ground | d: ~1113' | Ele | evation, proposed | post-construction | n: 1081' | |
| 5) Well Type | (a) Gas Other | | Oil | Unde | erground Storag | ge | |
| | (b)If Gas | Shallow | п | Deep | | | |
| | (O)II Gas | Horizontal | 8 | Беер | | | 20 |
| 6) Existing Pac | d. Ves or No | - | | | | | 12/12 |
| 7) Proposed Ta | arget Formati | on(s), Depth(s) | | pated Thickness at | | , , | 17/10 |
| 8) Proposed To | otal Vertical I | Depth: 7400' | TVD | 396 | | | |
| 9) Formation a | t Total Vertic | al Depth: Ma | arcellus S | hale | | | |
| 10) Proposed T | Total Measure | ed Depth: 14 | ,600' MD | | | | |
| 11) Proposed H | Horizontal Le | g Length: 66 | 42' | | | | |
| 12) Approxima | ite Fresh Wat | er Strata Depti | 18: | 51', 156' | | | 12/2 |
| 13) Method to | Determine Fr | esh Water Dep | oths: O | ffset well records. Dep | oths have been adj | usted accordi | ng to surface elevations. |
| 14) Approxima | te Saltwater | Depths: 119 | 4' | | | | |
| 15) Approxima | te Coal Seam | Depths: 201 | ', 435', 74 | 46, 1080' | | | |
| 16) Approxima | te Depth to P | ossible Void (| coal mir | ne, karst, other): _ | lone anticipated | | |
| 17) Does Propo directly overlyi | | | | Yes | No | V | |
| (a) If Yes, pro | vide Mine In | fo: Name: | | | | | AND THE RESERVE OF THE PERSON NAMED IN |
| | | Depth: | 2000 | | | ange services ere | - 20.00000000000000000000000000000000000 |
| | | Seam: | 50-30-0 | | | | |
| RECE Office of O | | Owner: | | | | | |

DEC 3 0 2013

WV Department of Environmental Protection Page 1 of 3

WW-6B (9/13)

18)

Liners

212.

CASING AND TUBING PROGRAM

| TYPE | Size | New or Used | Grade | Weight per ft. (lb/ft) | FOOTAGE: For Drilling | INTERVALS: Left in Well | CEMENT: Fill-up (Cu. Ft.) |
|--------------|---------|-------------------|-----------|---------------------------|--------------------------|----------------------------|---------------------------------|
| Conductor | 20" | New | H-40 | 94# | 40' | 40' | CTS,38 Cu. Ft. |
| Fresh Water | 13-3/8" | New | J-55/H-40 | 54.5#/ 48# | 300' | 300' | CTS, 417 Cu. Ft |
| Coal | 9-5/8" | New | J-55 | 36# | 2450' | 2450' | CTS,998 Cu. Ft. |
| Intermediate | | | | | | | |
| Production | 5-1/2" | New | P-110 | 20# | 14600' | 14600' | 3623 Cu. Ft. |
| Tubing | 2-3/8° | New | N-80 | 4.7# | | 7100' | |
| Liners | | | | | | | |

TYPE Size Wellbore Wall **Burst Pressure** Cement Type Cement Yield (cu. ft./k) Diameter **Thickness** Conductor 20" 24" 0.438" 1530 Class A 1.18 Fresh Water 13-3/8" 17-1/2" 0.38"/0.33" 2730/1730 Class A 1.18 Coal 9-5/8" 12-1/4" 0.352" 3520 Class A 1.18 Intermediate Production 8-3/4" & 8-1/2" 5-1/2" 0.361" 12630 Lead-H/POZ & Tell - H H/POZ-1.44 & H-1.8 Tubing 2-3/8" 4.778" 0.19" 11200

PACKERS

| Kind: | N/A | |
|-------------|-----|--|
| Sizes: | N/A | |
| Depths Set: | N/A | |

RECEIVED
Office of Oil and Gas

DEC 3 0 2013

WV Department of Environmental Protection Page 2 of 3

| 19) Describe proposed well work, including the drilling and plugging back of any pilot hole: |
|---|
| Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale. |
| 20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." |
| 21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 23.32 acres 22) Area to be disturbed for well pad only, less access road (acres): 4.35 acres |
| 23) Describe centralizer placement for each casing string: |
| Conductor: no centralizers Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th joint spaced up the hole to surface. Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th collar to surface. Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casing. |
| 24) Describe all cement additives associated with each cement type: |
| Conductor: no additives, Class A cement. Surface: Class A cement with 2% calcium and 1/4 lb flake, S gallons of clay treat Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of clay treat Production: Lead cement- 50/50 Class H/Poz + 1.5% selt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51 Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20 |
| 25) Proposed borehole conditioning procedures: Conductor: blowhole clean with air, run casing, 10 bbls fresh water. |

Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate piges by fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer. Cocarine, circulate 40 bbls brine

fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.
Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip to water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to base of curve, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls from water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water. WV Dept. of Environmental Prote barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

*Note: Attach additional sheets as needed.

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION 470 1706418 OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

| Operator Name Antero Resou | rces Corporation | OP Code 494488557 |
|---|---|---|
| Watershed (HUC 10) Meatho | ouse Fork Qua | adrangle New Millon |
| Elevation 1081' | County Doddridge | District New Milton |
| Do you anticipate using more Will a pit be used? Yes | than 5,000 bbls of water to complete the p | roposed well work? Yes No No |
| If so, please describe Will a synthetic liner | anticipated pit waste: No very be used at this said to be used in the pit? Yes No | Offing and Powback Fluids will be showd in tendos. Cuttings will be blocked and insided off sale.) If so, what ml.? N/A |
| | ethod For Treated Pit Wastes: | |
| Une Reu Off | | ons when applicable. API# will be provided on Form WR-34) sposal location) (Meadowfill Landfill Permit #SWF-1032-98) |
| Will closed loop system be use | d? If so, describe: Yes | |
| Drilling medium anticipated for | or this well (vertical and horizontal)? Air, | freshwater, oil based, etc. Duschaff Form, Production - Water Bases Mus |
| -If oil based, what typ | e? Synthetic, petroleum, etc. N/A | |
| Additives to be used in drilling | medium? Please See Attachment | |
| Drill cuttings disposal method | Leave in pit, landfill, removed offsite, et | c. Stored in tanks, removed offsite and taken to landfill. |
| -If left in pit and plan | to solidify what medium will be used? (o | ement, lime, sawdust) N/A |
| -Landfill or offsite na | me/permit number? Meadowfill Landfill (Perm | it #SWF-1032-98) |
| on August 1, 2005, by the Offi provisions of the permit are er law or regulation can lead to er I certify under penalt application, form and all attach | ce of Oil and Gas of the West Virginia De aforceable by law. Violations of any term aforcement action. by of law that I have personally examine charges, thereto and that based on my | of the GENERAL WATER POLLUTION PERMIT issued partment of Environmental Protection. I understand that the nor condition of the general permit and/or other applicable and am familiar with the information submitted on this inquiry of those individuals improved y responsible for rate, and complete. I am and complete are significant to or imprisonment. |
| | | NOV Gas considion |
| Company Official Title Envi | ronmental & Regulatory Manager | NOV 2 Oil and Gas Protection |
| Subscribed and swom before n | day of Oct | 26 13 LISA BOTTINELLI Notary Public Notary Public State of Colorado Notary ID 20124072365 My Commission Expires Nov 9, 2016 |

| Form WW-9 | Operator's Well No. | fflemeyer Unit 11 |
|--|--|-----------------------------|
| Antero Resources Corporation | operator warre | |
| Proposed Revegetation Treatment: Acres Disturbed 23.32 | Prevegetation pH | |
| Lime 2-3 Tons/acre or to correct to pl | 6.5 | |
| Fertilizer type Hay or straw or Wood Fiber (will be used | | |
| Fertilizer amount 500 | bs/acre | |
| Mulch 2-3 Tons | acre | |
| New Access Road (4.79). + New Staging Area (1.66). + New Well Pad. (4.35). + New V | | ilea (8.42) = 23.32 New Aon |
| See | d Mixtures | |
| Temporary | Permanent | |
| Seed Type lbs/acre | Seed Type lbs | /acre |
| Annual Ryegrass 40 | Crownvetch 10 | 0-15 |
| "See attached Table 3 for additional seed type (Snake Run Pad Design Page 19) | "See attached Table 4a for additional seed type (Saako Run F | ad Design Page 19) |
| *or type of grass seed requested by surface owner | *or type of grass seed requested by se | urface owner |
| NOTE: No Fescue or Timothy Grass shall I | be used. | |
| Plan Approved by: Douglas Newlow Comments: Presced + Mulch Tegulations | motall Ets to | we dep |
| / | | |
| Contact inspector before Or Conditions Dille | re construction b | res me |
| | | |
| Title: Das inspector Field Reviel Received Yes Office of Oil and Gas | Date: 12-30-2017 _) No | |
| DEC 3 0 2013 | | |

WV Department of Environmental Protection

Form WW-9 Additives Attachment

SURFACE INTERVAL

- 1. Fresh Water
- 2. Soap -Foamer AC
- 3. Air

INTERMEDIATE INTERVAL

STIFF FOAM RECIPE:

- 1) 1 ppb Soda Ash / Sodium Carbonate-Alkalinity Control Agent
- 2) 1 ppb Conqor 404 (11.76 ppg) / Corrosion Inhibitor
- 3) 4 ppb KLA-Gard (9.17 ppg) / Amine Acid Complex-Shale Stabilizer
- 4) 1ppb Mil Pac R / Sodium Carboxymethylcellulose-Filtration Control Agent
- 5) 12 ppb KCL / Potassium Chloride-inorganic Salt
- 6) Fresh Water 80 bbls
- 7) Air

PRODUCTION INTERVAL

- 1. Alpha 1655
 - Salt Inhibitor
- 2. Mil-Carb
 - Calcium Carbonate
- 3. Cottonseed Hulls
 - Cellulose-Cottonseed Pellets LCM
- 4. Mil-Seal
 - Vegetable, Cotton & Cellulose-Based Fiber Blend LCM
- 5. Clay-Trol
 - Amine Acid Complex Shale Stabilizer
- 6. Xan-Plex
 - Viscosifier For Water Based Muds
- Mil-Pac (All Grades)
 - Sodium Carboxymethylcellulose Filtration Control Agent
- 8. New Drill
 - Anionic Polyacrylamide Copolymer Emulsion Shale Stabilizer
- 9. Caustic Soda
 - Sodium Hydroxide Alkalinity Control
- 10. Mil-Lime
 - Calcium Hydroxide Lime
- 11. LD-9
- Polyether Polyol Drilling Fluid Defoamer
- 12. Mil Mica
 - Hydro-Biotite Mica LCM

Piece No.

13. Escaid 110

Drilling Fluild Solvent - Aliphatic Hydrocarbon

14. Ligco

Highly Oxidized Leonardite - Filteration Control Agent

15. Super Sweep

Polypropylene - Hole Cleaning Agent

16. Sulfatrol K.

Drilling Fluid Additive - Sulfonated Asphalt Residuum

17. Sodium Chloride, Anhydrous

Inorganic Salt

18. D-D

Drilling Detergent - Surfactant

19. Terra-Rate

Organic Surfactant Blend

20. W.O. Defoam

Alcohol-Based Defoamer

21. Perma-Lose HT

Fluid Loss Reducer For Water-Based Muds

22. Xan-Plex D

Polysaccharide Polymer - Drilling Fluid Viscosifier

23, Walnut Shells

Ground Cellulosic Material - Ground Walnut Shells - LCM

24. Mil-Graphite

Natural Graphite - LCM

25. Mil Bar

Barite - Weighting Agent

26. X-Cide 102

Biocide

27. Soda Ash

Sodium Carbonate - Alkalinity Control Agent

28. Clay Trol

Amine Acid complex - Shale Stabilizer

29. Sulfatrol

Sulfonated Asphalt - Shale Control Additive

30, Xanvis

Viscosifier For Water-Based Muds

31. Milstarch

Starch - Fluid Loss Reducer For Water Based Muds

32. Mil-Lube

Drilling Fluid Lubricant

RECEIVED Office of Oil & Gas

NOV 22 2013

WV Department of Environmental Protection



Well Site Safety Plan Antero Resources

Well Name: Dufflemeyer Unit 1H, Dufflemeyer Unit 2H,

Honey Unit 1H, Honey Unit 2H, Asena Unit 1H,

Asena Unit 2H

Pad Location: Snake Run Pad

Doddridge County/ New Milton District

GPS Coordinates: Lat 39°12'17.52"/Long -80°39'3.68" (NAD83)

Driving Directions:

From New Milton:

Head SW on CO Route 25/ Meathouse Fork Rd. for 3.8 miles until past the intersection with CO Route 25/8 Snake Run Branch. Access Road will be on left.

RECEIVED
Office of Oil and Gas

TEL 2 0 2013

WV Department of Environmental Protection DCW 2013

west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01679

API/ID Number:

047-017-06418

Operator:

Antero Resources

Dufflemeyer Unit 1H

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- ·Quantification of known existing demands on the water supply (Large Quantity Users);
- Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.



Source Summary

WMP-01679

API Number:

047-017-06418

Operator:

Antero Resources

Dufflemeyer Unit 1H

Stream/River

Ohio River @ Ben's Run Withdrawal Site B Source

Tyler

Owner:

Ben's Run Land Company

Limited Partnership

Start Date

End Date

Total Volume (gal) Max. daily purchase (gal)

Intake Latitude: Intake Longitude;

8/29/2013

8/29/2014

7,210,000

39.46593

-81.110781

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

3,360 Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast website: http://www.erh.noaa.gov/ohrfc//flows.shtml

& Source

West Fork River @ JCP Withdrawal

Harrison

Owner:

James & Brenda Raines

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.320913

-80.337572

8/29/2013

8/29/2014

7,210,000

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

2,000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

Min. Gauge Reading (cfs):

175.00

Min. Passby (cis)

146.25

DEP Comments:

& Source

West Fork River @ McDonald Withdrawal

Harrison

Owner:

David Shrieves

Start Date

End Date

7,210,000

Total Volume (gal) Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.16761

-80.45069

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

8/29/2013 8/29/2014

3,000

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

106.30

Harrison

Owner:

David Shrieves

West Fork River @ GAL Withdrawal

s Source

| Source | McElroy Creek | @ Forest \ | Withdrawal | | Tyler | Owner: Fe | orest C. & Brenda L. Moore |
|----------------------------|-----------------------|------------|----------------------------------|--------------|---------------|-------------------------------|---------------------------------------|
| Start Date | End Date | | Total Volume (gal) | Max. daily p | urchase (gal) | Intake Latitude | Intake Longitude: |
| 8/29/2013 | 8/29/2014 | | 7,210,000 | | | 39.39675 | -80.738197 |
| Regulated | 1 Stream? | | Ref. Gauge I | D: 31145 | 00 | MIDDLE ISLAND CREEK A | T LITTLE, WV |
| Max. Pump | rate (gpm): | 1,000 | Min. Gauge Reso | ling (cfs): | 74.77 | Min. Passby (| cfs) 13.10 |
| | DEP Comme | nts: | | | | | |
| Source | Meathouse Fo | rk @ Gagn | on Withdrawal | | Doddridge | Owner: Ge | orge L. Gagnon and Susan C. Gagnon |
| Start Date 8/29/2013 | End Date 8/29/2014 | | Total Volume (gal) 7,210,000 | Max. daily p | urchase (gal) | Intake Latitude 39.26054 | Intake Longitude: -80.720998 |
| Regulated | Stream? | | Ref. Gauge I | D: 31145 | 00 | MIDDLE ISLAND CREEK A | T LITTLE, WV |
| Max. Pump | rate (gpm): | 1,000 | Min. Gauge Read | ling (cfs): | 71.96 | Min. Passby (| cfs) 11.74 |
| | DEP Comme | nts: | | | | | |
| Source | Meathouse Fo | rk @ White | ehair Withdrawal | | Doddridge | Owner: | Elton Whitehair |
| Start Date 8/29/2013 | End Date 8/29/2014 | | Total Volume (gal). 7,210,000 | Max. daily p | urchase (gal) | Intake Latitude: 39.211317 | Intake Longitude: -80.679592 |
| ☐ Regulated | Stream? | | Ref. Gauge ! | D: 311450 | 00 | MIDDLE ISLAND CREEK A | T LITTLE, WV |
| Max. Pump | rate (gpm): | 1,000 | Win. Gauge Read | ling (cfs): | 69.73 | Min. Passby (| rfs) 7.28 |
| | DEP Commer | its: | | | | | |

o Source Tom's Fork @ Erwin Withdrawal Doddridge Owner: John F. Erwin and Sandra E. Total Volume (gal) Max. daily purchase (gal) Start Date End Date Intake Latitude: Intake Longitude: 8/29/2013 8/29/2014 7,210,000 39.174306 -80.702992 Regulated Stream? Ref. Gauge ID: 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 69.73 Min. Passby (cfs) 0.59 **DEP Comments:** Arnold Creek @ Davis Withdrawal a Source Doddridge Owner: **Jonathon Davis** Total Volume (gal) Max. daily purchase (gal) Start Date End Date Intake Latitude: Intake Longitude: 8/29/2013 8/29/2014 7,210,000 39.302006 -80.824561 Regulated Stream? Ref. Gauge ID: 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 69.73 Min. Passby (cfs) 3.08 DEP Comments. Buckeye Creek @ Powell Withdrawal Source Doddridge Owner: **Dennis Powell** Start Date End Date Total Volume (gal) Max. daily purchase (gal) intake Latitude: Intake Longitude: 8/29/2013 8/29/2014 7,210,000 39.277142 -80.690386 Regulated Stream? Ref. Gauge |D: 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 69.73 Min. Passby (c/s) 4.59 DEP Comments:

South Fork of Hughes River @ Knight Withdrawal Source Ritchie Tracy C. Knight & Owner: Stephanie C. Knight Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/29/2013 8/29/2014 7,210,000 39.198369 -80.870969 Regulated Stream? Ref. Gauge ID: 3155220 OUTH FORK HUGHES RIVER BELOW MACFARLAN, WI Max. Pump rate (gpm): 3,000 Min. Gauge Reading (cfs): 39.80 Min. Passby (cfs) 1.95 **DEP Comments:** North Fork of Hughes River @ Davis Withdrawal Source Ritchie Lewis P. Davis and Norma Owner: J. Davis Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/29/2013 8/29/2014 7,210,000 39.322363 -80.936771 Regulated Stream? Ref. Gauge ID: **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, WI** 3155220 Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 35.23 Min. Passby (cfs) 2.19 **DEP Comments:**

Source Summary

WMP-01679

API Number:

047-017-06418

Operator:

Antero Resources

Dufflemeyer Unit 1H

Purchased Water

o Source

Ohio River @ Select Energy

Pleasants

Owner:

Select Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/29/2013

8/29/2014

7,210,000

500,000

39.346473

-81.338727

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

1,680

Min. Gauge Reading (cfs):

7,216.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Middle Island Creek @ Solo Construction

Pleasants

Owner:

Solo Construction, LLC

Start Date 8/29/2013

End Date 8/29/2014 Total Volume (gal) 7,210,000

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39,399094

-81.185548

Ohio River Min. Flow Ref. Gauge ID:

9999999

1,000,000

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

Regulated Stream?

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Elevation analysis indicates that this location has the same elevation as Middle Island Creek's pour point into the Ohio River. As such, it is deemed that water flow at this

location is heavily influenced by the Ohio River.

Source

Claywood Park PSD

Wood

Owner:

Claywood Park PSD

Start Date

End Date

Total Volume (gal) Max. daily purchase (gal)

7,210,000

Intake Latitude: Intake Longitude:

8/29/2013

8/29/2014

Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

Regulated Stream?

Min. Gauge Reading (cis):

7,216.00

Min. Passby (cfs)

DEP Comments:

Elevation analysis indicates that this location has approximately the same elevation as Little Kanawha's pour point into the Ohio River. As such, it is deemed that water flow at this location is heavily influenced by the Ohio River.

Source Sun Valley Public Service District Harrison Dwner: Sun Valley PSD


 Start Date
 End Date
 Total Volume (gal)
 Max. daily purchase (gal)
 Intake Latitude: intake Longitude:

 8/29/2013
 8/29/2014
 7,210,000
 200,000

☑ Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000 WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 171.48 Min. Passby (cfs)

| | WMP-0 | 01679 | API/ID Numbe | r: 047-017-06 lemeyer Unit 1H | 418 Operator: Antero | Resources |
|--------------------------------------|---|------------------------|--------------------------------|----------------------------------|--|--|
| Source I | D: 31203 Sou | 1000 | River @ Select End t Energy | ergy | Source Latitude: 39. | |
| ☐ Tro | HUC-8 Code: Drainage Area (dangered Species) out Stream? gulated Stream? oximate PSD? | | tream? | Pleasants | Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneou | 8/29/2013 8/29/2014 7,210,000 1,680 |
| Gauged Stream? | | | | Max. Truck pump ra | ate (gpm) | |
| | | | | | | |
| | Reference Gaug Drainage Area (sq | 9999998 . mi.) 25,0 | Ohio River Statio | on: Racine Dam | Chuse Threshold (cfs): | 7216 |
| Vlonth | | I man | The second second | on: Racine Dam | િમાહ્યe Threshold (cfs): | 7216 |
| Month 1 | Drainage Area (sq Median monthly flow | Threshold | 00.00 Estimated Available | on: Racine Dam | िमाइंट Threshold (cfs): | 7216 |
| | Median monthly flow (cfs) | Threshold | 00.00 Estimated Available | on: Racine Dam | િક્ષાહ્ Threshold (cfs): | 7216 |
| 1 | Median monthly flow (cfs) 50,956.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | િલ્લાહ્ Threshold (cfs): | 7216 |
| 1 2 | Median monthly flow (cfs) 50,956.00 54,858.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | टिनाइंट Threshold (cfs): | 7216 |
| 1 2 3 | Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | ্রিমাঙ্গ্ e Threshold (cfs): | 7216 |
| 1 2 3 4 | Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | િમાહ્ Threshold (cfs): | 7216 |
| 1 2 3 4 5 | Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | િક્ષાહ્ Threshold (cfs): | 7216 |
| 1 2 3 4 5 | Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 27,095.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | हिमाइ Threshold (cfs): | 7216 |
| 1 2 3 4 5 6 | Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 27,095.00 17,840.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | हिमाइ Threshold (cfs): | 7216 |
| 1 2 3 4 5 6 7 8 | Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 27,095.00 17,840.00 14,941.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | हिमाइ Threshold (cfs): | 7216 |
| 2 3 4 5 6 7 8 9 | Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 27,095.00 17,840.00 14,941.00 | Threshold | 00.00 Estimated Available | on: Racine Dam | हिमाइ Threshold (cfs): | 7216 |

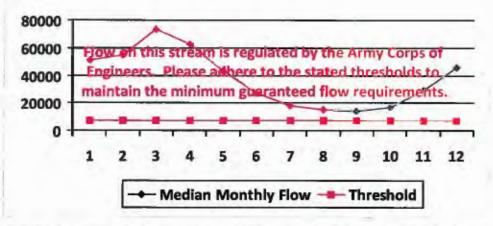

| Base Threshold (cfs): | - |
|-------------------------------|------|
| Upstream Demand (cfs): | 0.00 |
| Downstream Demand (cfs): | 0.00 |
| Pump rate (cfs): | 3.74 |
| Headwater Safety (cfs): | 0.00 |
| Ungauged Stream Safety (cfs): | 0.00 |


Source Detail WMP-01679 API/ID Number: 047-017-06418 Operator: Antero Resources Dufflemeyer Unit 1H Source Latitude: |39.399094 Source ID: 31204 Source Name Middle Island Creek @ Solo Construction Solo Construction, LLC Source Longitude: -81.185548 5030201 HUC-8 Code: 8/29/2013 Anticipated withdrawal start date: Drainage Area (sq. mi.): 25000 Pleasants County: Anticipated withdrawal end date: 8/29/2014 Mussel Stream? Endangered Species? Total Volume from Source (gal): 7,210,000 Trout Stream? ☐ Tier 3? Regulated Stream? Max. Pump rate (gpm): Ohio River Min. Flow ✔ Proximate PSD? City of St. Marys Max. Simultaneous Trucks: ✓ Gauged Stream? Max. Truck pump rate (gpm) Ohio River Station: Willow Island Lock & Dam Reference Gaug 9999999

| Month | Median monthly flow (cfs) | Threshold (+ pump | Available water (cfs) |
|-------|---------------------------------|----------------------|--------------------------|
| 1 | 45,700.00 | = | |
| . 2 | 49,200.00 | - | 2. |
| 3 | 65,700.00 | | 4 |
| 4 | 56,100.00 | * | 2 |
| 5 | 38,700.00 | - | |
| 6 | 24,300.00 | - | ÷. |
| 7 | 16,000.00 | | 19 |
| 8 | 13,400.00 | - | |
| 9 | 12,800.00 | | |
| 10 | 15,500.00 | - | L. |
| 11 | 26,300.00 | - | - |
| 12 | 41,300.00 | - | |

Water Availability Profile

25,000.00

Drainage Area (sq. mi.)

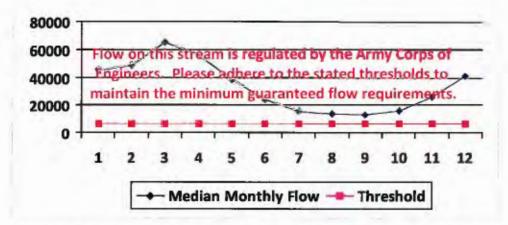


Water Availability Assessment of Location


Gauge Threshold (cfs):

6468


| Headwater Safety (cfs): Ungauged Stream Safety (cfs): | 0.00 |
|--|------|
| Downstream Demand (cfs): Pump rate (cfs): | 0.00 |
| Upstream Demand (cfs): | 0.00 |
| Base Threshold (cfs): | - 13 |

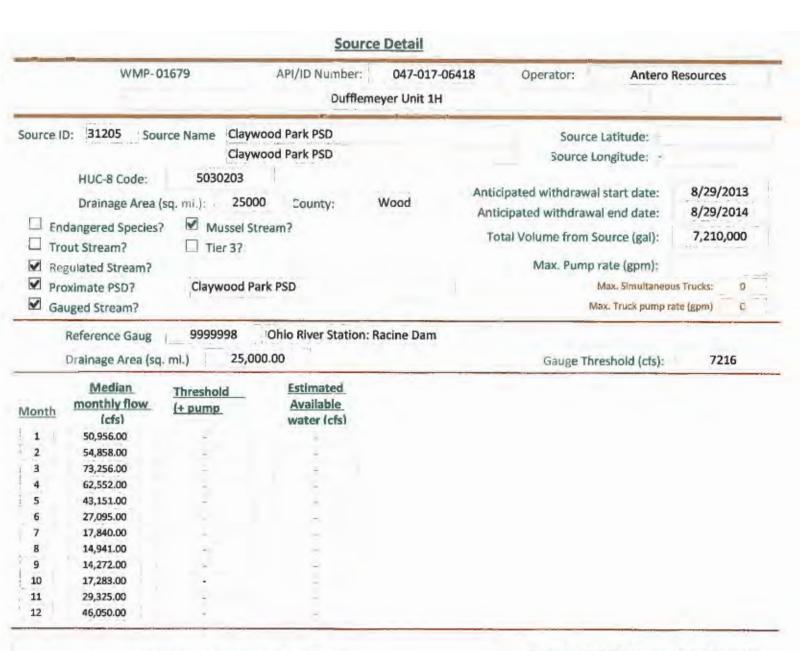



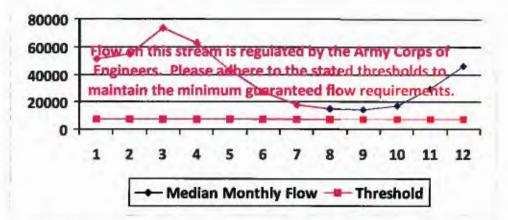

| Base Threshold (cfs): | 0.00 |
|-------------------------------|------|
| Upstream Demand (cfs): | 7,75 |
| Downstream Demand (cfs): | 0.00 |
| Pump rate (cfs): | |
| Headwater Safety (cfs): | 0.00 |
| Ungauged Stream Safety (cfs): | 0.00 |
| Min. Gauge Reading (cfs): | |
| Passby at Location (cfs): | |

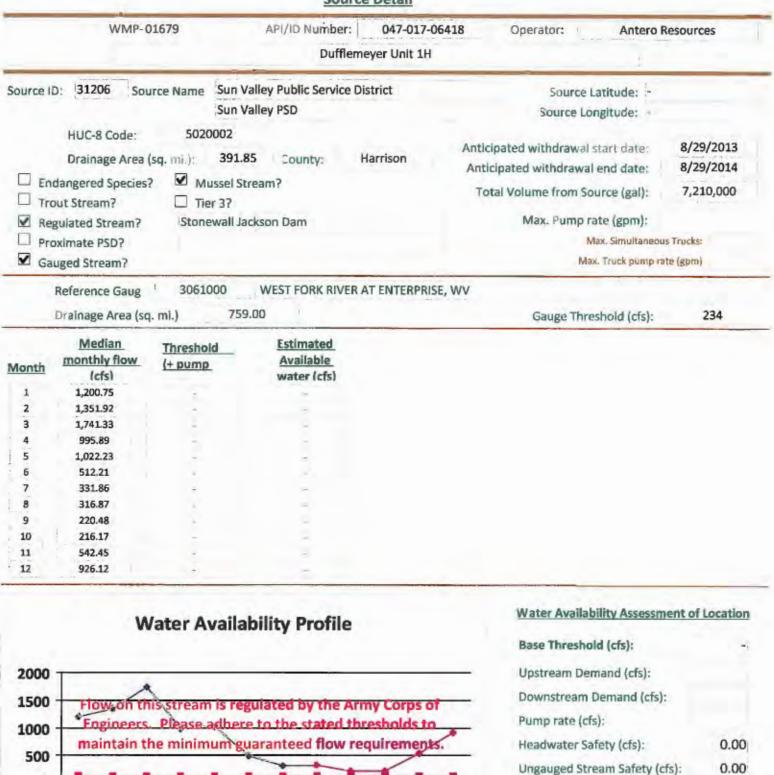

Threshold

10

11

12

Min. Gauge Reading (cfs):

Passby at Location (cfs):


1

2


3

Median Monthly Flow

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

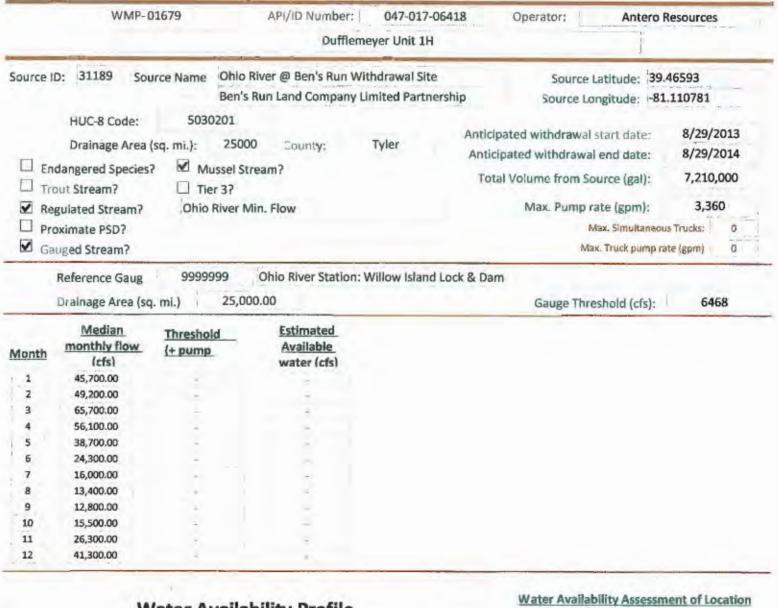



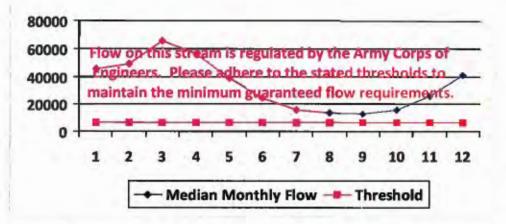


| Upstream Demand (cfs): | 0.00 |
|-------------------------------|------|
| Downstream Demand (cfs): | 0.00 |
| Pump rate (cfs): | 7.49 |
| Headwater Safety (cfs): | 0.00 |
| Ungauged Stream Safety (cfs): | 0.00 |
| Min. Gauge Reading (cfs): | |
| Passby at Location (cfs): | |


Source Detail WMP-01679 047-017-06418 API/ID Number: Operator: Antero Resources Dufflemeyer Unit 1H Source ID: 31190 Source Name West Fork River @ JCP Withdrawal Source Latitude: 39.320913 James & Brenda Raines Source Longitude: -80.337572 5020002 HUC-8 Code: Anticipated withdrawal start date: 8/29/2013 Drainage Area (sq. mi.): 532.2 County: Harrison Anticipated withdrawal end date: 8/29/2014 **Endangered Species?** Mussel Stream? Total Volume from Source (gal): 7,210,000 Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 2,000 ✓ Regulated Stream? Stonewall Jackson Dam Proximate PSD? Max. Simultaneous Trucks: 0 Gauged Stream? Max. Truck pump rate (gpm) WEST FORK RIVER AT ENTERPRISE, WV 3061000 Reference Gaug 759.00 234 Drainage Area (sq. mi.) Gauge Threshold (cfs):

| Month | Median monthly flow (cfs) | Threshold (+ pump | Available water (cfs) |
|-------|---------------------------------|----------------------|--------------------------|
| 1 | 1,630.82 | - | |
| 2 | 1,836.14 | - | |
| 3 | 2,365.03 | | - |
| 4 | 1,352.59 | - | |
| 5 | 1,388.37 | - | 1 |
| 6 | 695.67 | - | - |
| 7 | 450.73 | | - |
| 8 | 430.37 | | |
| 9 | 299.45 | | |
| 10 | 293.59 | - | |
| 11 | 736.74 | | |
| 12 | 1,257.84 | | |

Water Availability Profile

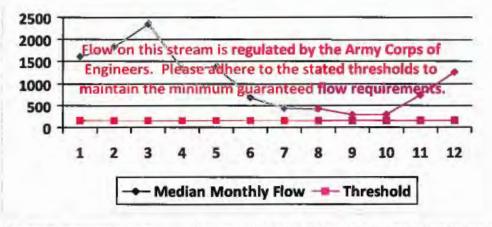

| Min. Gauge Reading (cfs): Passby at Location (cfs): | |
|--|-------|
| Ungauged Stream Safety (cfs): | 0.00 |
| Headwater Safety (cfs): | 0.00 |
| Pump rate (cfs): | 4.46 |
| Downstream Demand (cfs): | 0.00 |
| Upstream Demand (cfs): | 24.29 |
| Base Threshold (cfs): | |

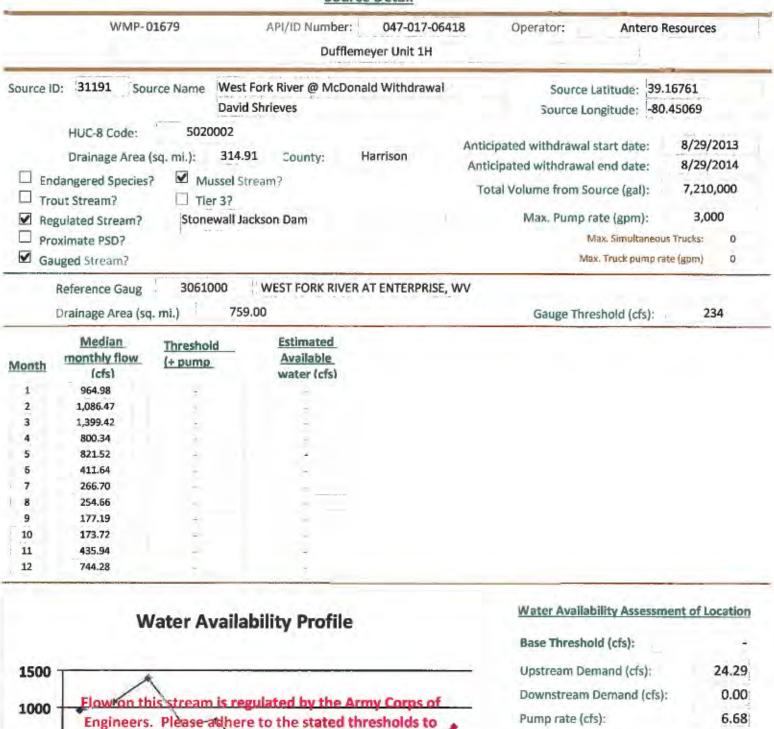

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Threshold

10

11

12

ranteed flow-requirements

5

Median Monthly Flow

500

0


24.27

0.00

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

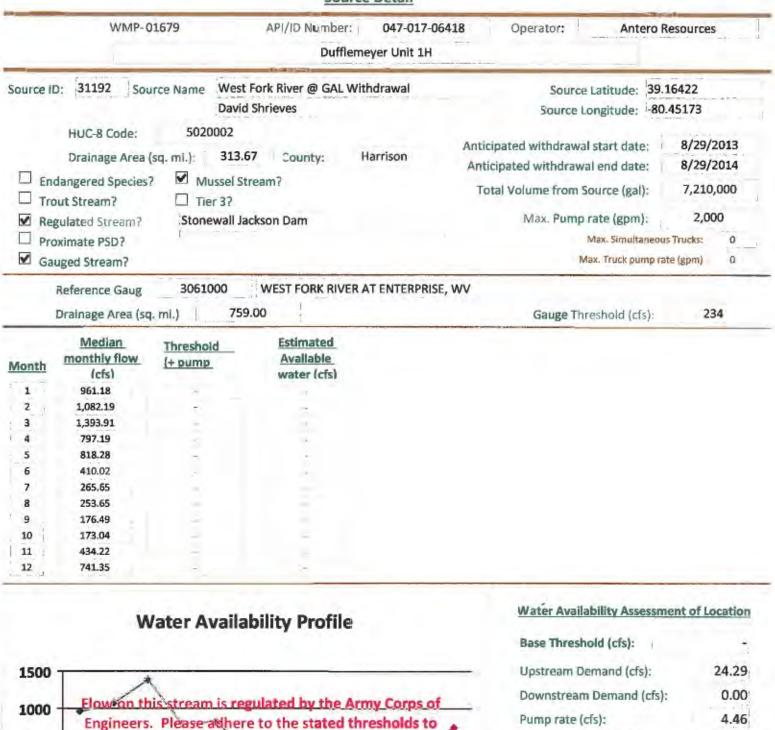

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Threshold

10

11

12

9

5

Median Monthly Flow

6

500

24.18

0.00

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs):

Passby at Location (cfs):


Source Detail WMP-01679 API/ID Number: 047-017-06418 Operator: Antero Resources Dufflemeyer Unit 1H Middle Island Creek @ Mees Withdrawal Site Source Name Source Latitude: 39.43113 Sarah E. Mees Source Longitude: -81.079567 5030201 HUC-8 Code: 8/29/2013 Anticipated withdrawal start date: Drainage Area (sq. mi.): 484.78 Pleasants County: Anticipated withdrawal end date: 8/29/2014 ✓ Endangered Species? ✓ Mussel Stream? Total Volume from Source (gal): 7,210,000 ☐ Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 3,360 Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: ✓ Gauged Stream? Max. Truck pump rate (gpm) 0 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug

| Month | Median monthly flow (cfs) | Threshold (+ pump | Available water (cfs) |
|-------|---------------------------------|----------------------|--------------------------|
| 1 | 519.88 | 55.12 | 465.14 |
| 2 | 653.95 | 55.12 | 599.22 |
| 3 | 731.75 | 55.12 | 677.01 |
| 4 | 543.38 | 55.12 | 488.65 |
| 5 | 286.64 | 55.12 | 231.90 |
| 6 | 100.10 | 55.12 | 45.36 |
| 7 | 56.65 | 55.12 | 1.91 |
| 8 | 46.64 | 55.12 | -8.10 |
| 9 | 23.89 | 55.12 | -30.85 |
| 10 | 30.01 | 55.12 | -24.72 |
| 11 | 146.56 | 55.12 | 91.83 |
| 12 | 358.10 | 55.12 | 303.37 |
| | | | |

Drainage Area (sq. mi.)

Water Availability Profile

458.00

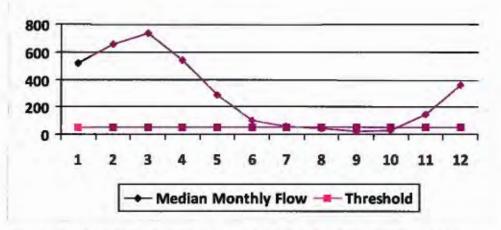

Water Availability Assessment of Location

Gauge Threshold (cfs):

45


| Passby at Location (cfs): | 47.63 |
|-------------------------------|-------|
| Min. Gauge Reading (cfs): | 52.49 |
| Ungauged Stream Safety (cfs): | 0.00 |
| Headwater Safety (cfs): | 0.00 |
| Pump rate (cfs): | 7.49 |
| Downstream Demand (cfs): | 0.00 |
| Upstream Demand (cfs): | 0.00 |
| Base Threshold (cfs): | 47.63 |

| | WMP-0 | 1679 | , | API/ID Number: | 047-017-06418 | 8 Operator: | Antero I | Resources |
|----------|------------------------|-------------------------|--|---------------------------|-----------------|------------------------|------------------|---------------|
| | Ĺ | | | Dufflen | neyer Unit 1H | | | |
| Source I | D: 31194 Sou | rce Name | Middle Is | and Creek @ Da | wson Withdrawal | Source | Latitude: 39. | 379292 |
| | | | Gary D. a | nd Rella A. Daws | on | Source Lo | ngitude: -80 | .867803 |
| | HUC-8 Code: | 5030 | 201 | | | | | |
| | | | | | -243. | Anticipated withdrawal | start date: | 8/29/2013 |
| | Drainage Area (| sq. mi.): | 181.34 | County: | Tyler | Anticipated withdrawa | end date: | 8/29/2014 |
| ₩ En | dangered Species? | MI MI | issel Stream | n? | | | | |
| □ Tr | out Stream? | ☐ Tie | r 3? | | | Total Volume from So | ource (gal): | 7,210,000 |
| _ | gulated Stream? | | | | 3.0 | Max. Pump r | ate (gpm): | 3,000 |
| 700 | oximate PSD? | | | | | | Aax. Simultaneou | s Trucks: 0 |
| F-7 | Actuality and a fine | | | | | | | |
| Ga Ga | uged Stream? | | and the same of th | | | TVIA | x. Truck pump ra | ite (gpm) - 0 |
| | Drainage Area (sq | Thresho | | Estimated | | | eshold (cfs): | 45 |
| Month | monthly flow (cfs) | (+ pump | | Available water (cfs) | | | | |
| 1 | 194.47 | 42.06 | | 152.68 | | | | |
| 2 | 244.62 | 42.06 | | 202.83 | | | | |
| 3 | 273.72 | 42.06 | | 231.93 | | | | |
| 4 | 203.26 | 42.06 | | 161.47 | | | | |
| 5 | 107.22 | 42.06 | | 65.43 | | | | |
| 6 | 37.44 | 42.06 | | -4.35 | | | | |
| 7 | 21.19 | 42.06 | | -20.60 | | | | |
| 8 | 17.45 | 42.06 | | -24.34 | | | | |
| | | | | | | | | |
| 9 | 8.94 | 42.06 | | -32,85 | | | | |
| | 8.94 11.23 54.82 | 42.06 42.06 42.06 | | -32.85 -30.56 13.04 | | | | |

Water Availability Profile

92.17

42.06

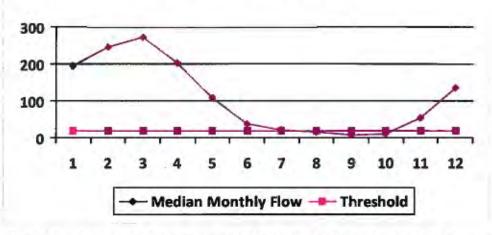

Water Availability Assessment of Location Base Threshold (cfs): 17.82

Upstream Demand (cfs): 13.10

Downstream Demand (cfs): 6.55

Pump rate (cfs): 6.68

Headwater Safety (cfs): 4.45
Ungauged Stream Safety (cfs): 0.00

Min. Gauge Reading (cfs): 76.03

Passby at Location (cfs):

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

12


133.96

28.82

| Source ID: 31195 Source Name McElroy Creek @ Forest Withdrawal Forest C. & Brenda L. Moore | 1.00 | 39675 .738197 |
|--|---|------------------|
| HUC-8 Code: 5030201 Drainage Area (sq. mi.): 88.85 County: Tyler Endangered Species? | Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneou Max. Truck pump ra | |
| Reference Gaug 3114500 MIDDLE ISLAND CREEK AT LITTLE Drainage Area (sq. mi.) 458.00 | Gauge Threshold (cfs): | 45 |

| Month | Median monthly flow (cfs) | Threshold (+ pump | Available water (cfs) |
|-------|---------------------------------|----------------------|--------------------------|
| 1 | 95.28 | 19.78 | 75.68 |
| 2 | 119.86 | 19.78 | 100.25 |
| 3 | 134.11 | 19.78 | 114.51 |
| 4 | 99.59 | 19.78 | 79.99 |
| 5 | 52.54 | 19.78 | 32.93 |
| 6 | 18.35 | 19.78 | -1.26 |
| 7 | 10.38 | 19.78 | -9.22 |
| 8 | 8.55 | 19.78 | -11.05 |
| 9 | 4.38 | 19.78 | -15.23 |
| 10 | 5.50 | 19.78 | -14.10 |
| 11 | 26.86 | 19.78 | 7.26 |
| 12 | 65.63 | 19.78 | 46.03 |
| | | | |

Water Availability Profile

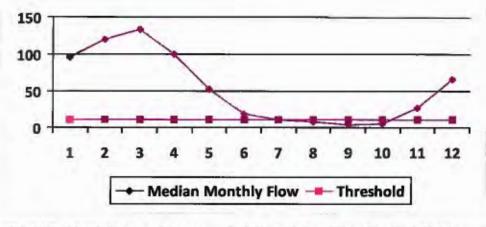

Water Availability Assessment of Location


| Min. Gauge Reading (cfs): Passby at Location (cfs): | 74.19 13.09 |
|--|----------------|
| Ungauged Stream Safety (cfs): | 2.18 |
| Headwater Safety (cfs): | 2.18 |
| Pump rate (cfs): | 2.23 |
| Downstream Demand (cfs): | 0.00 |
| Upstream Demand (cfs): | 4.46 |
| Base Threshold (cfs): | 8.73 |

| WMP-01679 | API/ID Number: 047-01 Dufflemeyer Unit | 7.000 | ntero Resources |
|------------------------------|--|-------|-----------------------------------|
| Source ID: 31196 Source Name | Meathouse Fork @ Gagnon Withdraw George L. Gagnon and Susan C. Gagn | | 1 + 400 1750 - 1 0000 |
| Drainage Area (sq. ml.): | 0201 60.6 County: Doddridge ussel Stream? er 3? | | ate: 8/29/2014 gal): 7,210,000 |

| Month | Median monthly flow (cfs) | Threshold (+ pump | Estimated Available water (cfs) |
|-------|---------------------------------|----------------------|---------------------------------------|
| 1 | 64.99 | 13.39 | 51.70 |
| 2 | 81.75 | 13.39 | 68.46 |
| 3 | 91.47 | 13,39 | 78.19 |
| 4 | 67.93 | 13.39 | 54.64 |
| 5 | 35.83 | 13.39 | 22.55 |
| 6 | 12.51 | 13.39 | -0.77 |
| 7 | 7.08 | 13.39 | -6.20 |
| 8 | 5.83 | 13.39 | -7.45 |
| 9 | 2.99 | 13.39 | -10.30 |
| 10 | 3.75 | 13.39 | -9.53 |
| 11 | 18.32 | 13.39 | 5.04 |
| 12 | 44.76 | 13.39 | 31.48 |

Drainage Area (sq. mi.)

Water Availability Profile

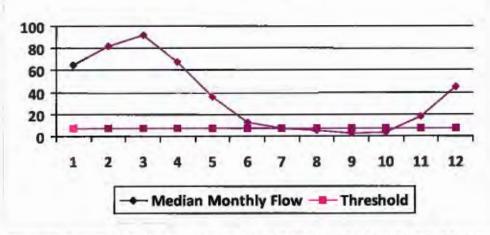

Gauge Threshold (cfs):


45

| Min. Gauge Reading (cfs): Passby at Location (cfs): | 71.96 |
|---|-------|
| Min Gauge Boading (efs). | 71 00 |
| Ungauged Stream Safety (cfs): | 1.49 |
| Headwater Safety (cfs): | 1.49 |
| Pump rate (cfs): | 2.23 |
| Downstream Demand (cfs): | 2.81 |
| Upstream Demand (cfs): | 2.23 |
| Base Threshold (cfs): | 5.95 |

| | 79 | API/ID Numbe | | 18 Operator: Anter | o Resources |
|--|----------|--------------------|--------------------|---|---------------------------------|
| | | Duf | flemeyer Unit 1H | | |
| ource ID: 31197 Source | e Name M | eathouse Fork @ Wh | itehair Withdrawal | Source Latitude: | 39.211317 |
| | Elt | on Whitehair | | Source Longitude: - | 80.679592 |
| HUC-8 Code: Drainage Area (sq. ✓ Endangered Species? Trout Stream? Regulated Stream? | Tal . | 0.37 County: | Doddridge | Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): | 8/29/2014 7,210,000 1,000 |
| ☐ Proximate PSD? ☐ Gauged Stream? | | | | Max. Simultani Max. Truck pum | Transfer of |

| Month | Median monthly flow (cfs) | Threshold (+ pump | Available water (cfs) |
|-------|---------------------------------|----------------------|-----------------------|
| 1 1 | 32.57 | 6.70 | 26.15 |
| 2 | 40,97 | 6.70 | 34.55 |
| 3 | 45.84 | 6.70 | 39.42 |
| 4 | 34.04 | 6.70 | 27.62 |
| 5 | 17.96 | 6.70 | 11.54 |
| 6 | 6.27 | 6.70 | -0.15 |
| 7 | 3.55 | 6.70 | -2.87 |
| 8 | 2.92 | 6.70 | -3.50 |
| 9 | 1.50 | 6.70 | -4.92 |
| 10 | 1.88 | 6.70 | -4.54 |
| 11 | 9.18 | 6.70 | 2.76 |
| 12 | 22.43 | 6.70 | 16.01 |


Water Availability Profile

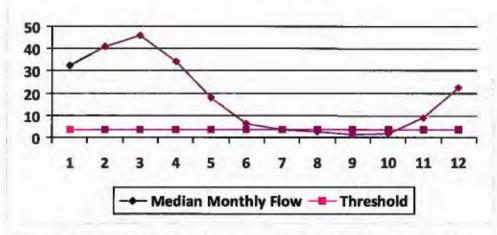

| water Safety (cfs): uged Stream Safety (cfs): | 0.75 |
|--|--|
| | 18.53 |
| rate (cis). | 2.25 |
| rate (cfs): | 2.23 |
| stream Demand (cfs): | 2.81 |
| eam Demand (cfs): | 0.00 |
| Threshold (cfs): | 2.98 |
| | Threshold (cfs): ream Demand (cfs): stream Demand (cfs): |

| | WMP-0 | 01679 | API/ID Number | r: 047-017-0 | 6418 | Operator: i Antero | Resources |
|----------------------------|---|---|--|-----------------|----------|--|--|
| | | | Duffl | lemeyer Unit 1H | | | |
| Source II | 31198 Sou | ,-0- | n's Fork @ Erwin Wit n F. Erwin and Sandr | 0.00 Service | | Source Latitude: 39 | .174306 |
| ☐ Tro | HUC-8 Code: Drainage Area dangered Species out Stream? gulated Stream? eximate PSD? | 5030201 (sq. mi.): 4.0 | 01 County: | Doddridge | Anticipa | ed withdrawal start date: ted withdrawal end date: folume from Source (gal): Max. Pump rate (gpm): Max. Simultaneo Max. Truck pump r | 8/29/2013 8/29/2014 7,210,000 1,000 us Trucks: 0 |
| Ga | uged Stream? | | | | | Max. Huck pump i | ate (gpm) |
| | Reference Gaug | 3114500 | MIDDLE ISLAND | CREEK AT LITTLE | , wv | 1.00 | 941.00 |
| | Reference Gaug Drainage Area (so | | MIDDLE ISLAND | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| to a | Drainage Area (so Median monthly flow | | Estimated Available | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| to a | Drainage Area (sq | n. mi.) 45 | 58.00 Estimated | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 | Drainage Area (so Median monthly flow (cfs) | Threshold (+ pump | Estimated Available water (cfs) | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month | Median Median monthly flow (cfs) 4.30 | Threshold (+ pump | Estimated Available water (cfs) 1.88 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 2 3 4 | Median Median monthly flow (cfs) 4.30 5.41 | Threshold (+ pump 2.82 2.82 2.82 2.82 2.82 | Estimated Available water (cfs) 1.88 2.98 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 2 3 | Median monthly flow (cfs) 4.30 5.41 6.05 | Threshold (+ pump 2.82 2.82 2.82 2.82 2.82 2.82 | Estimated Available water (cfs) 1.88 2.98 3.63 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 2 3 4 | Median monthly flow (cfs) 4.30 5.41 6.05 4.49 2.37 0.83 | Threshold (+ pump 2.82 2.82 2.82 2.82 2.82 2.82 2.82 | Estimated Available water (cfs) 1.88 2.98 3.63 2.07 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 2 3 4 5 6 7 | Median monthly flow (cfs) 4.30 5.41 6.05 4.49 2.37 0.83 0.47 | Threshold (+ pump 2.82 2.82 2.82 2.82 2.82 2.82 2.82 2.8 | Estimated Available water (cfs) 1.88 2.98 3.63 2.07 -0.05 -1.60 -1.96 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 2 3 4 5 | Median monthly flow (cfs) 4.30 5.41 6.05 4.49 2.37 0.83 | Threshold (+ pump 2.82 2.82 2.82 2.82 2.82 2.82 2.82 2.8 | Estimated Available water (cfs) 1.88 2.98 3.63 2.07 0.05 -1.60 -1.96 -2.04 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 2 3 4 5 6 7 | Median monthly flow (cfs) 4.30 5.41 6.05 4.49 2.37 0.83 0.47 0.39 0.20 | Threshold (+ pump 2.82 2.82 2.82 2.82 2.82 2.82 2.82 2.8 | Estimated Available water (cfs) 1.88 2.98 3.63 2.07 -0.05 -1.60 -1.96 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 2 3 4 5 6 7 8 | Median monthly flow (cfs) 4.30 5.41 6.05 4.49 2.37 0.83 0.47 0.39 0.20 0.25 | Threshold (+ pump 2.82 2.82 2.82 2.82 2.82 2.82 2.82 2.8 | Estimated Available water (cfs) 1.88 2.98 3.63 2.07 0.05 -1.60 -1.96 -2.04 -2.23 -2.18 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |
| Month 1 2 3 4 5 6 7 8 9 | Median monthly flow (cfs) 4.30 5.41 6.05 4.49 2.37 0.83 0.47 0.39 0.20 | Threshold (+ pump 2.82 2.82 2.82 2.82 2.82 2.82 2.82 2.8 | Estimated Available water (cfs) 1.88 2.98 3.63 2.07 0.05 -1.60 -1.96 -2.04 -2.23 | CREEK AT LITTLE | , wv | Gauge Threshold (cfs): | 45 |

Water Availability Profile

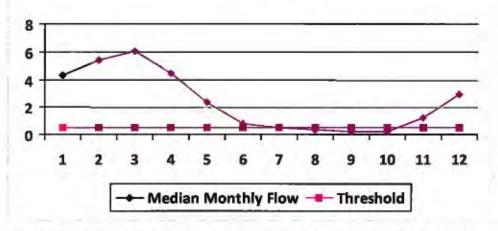


Water Availability Assessment of Location 0.39 Base Threshold (cfs): 0.00 Upstream Demand (cfs): 0.00 Downstream Demand (cfs): 2.23 Pump rate (cfs): Headwater Safety (cfs): 0.10 Ungauged Stream Safety (cfs): 0.10 Min. Gauge Reading (cfs): 69.73 Passby at Location (cfs): 0.59

| WMP-01679 | API/ID Number: 047-017-0 Dufflemeyer Unit 1H | 06418 Operator: Antero I | Resources |
|---|--|---|--|
| Jo | rnold Creek @ Davis Withdrawal mathon Davis | Source Latitude: 39. | 302006 .824561 |
| | 20.83 County: Doddridge | Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): | 8/29/2013 8/29/2014 7,210,000 1,000 |
| Proximate PSD? Gauged Stream? | | Max. Simultaneou Max. Truck pump ra | 412444 |
| Reference Gaug 3114500 Drainage Area (sq. mi.) | MIDDLE ISLAND CREEK AT LITTLE 458.00 | Gauge Threshold (cfs): | 45 |

| Month | Median monthly flow (cfs) | Threshold (+ pump | Available water (cfs) |
|-------|---------------------------------|----------------------|--------------------------|
| 1 | 22.34 | 5.30 | 17.29 |
| 2 | 28.10 | 5.30 | 23.05 |
| 3 | 31.44 | 5.30 | 26.39 |
| 4 | 23.35 | 5.30 | 18.30 |
| 5 | 12.32 | 5.30 | 7.26 |
| 6 | 4.30 | 5.30 | -0.75 |
| 7 | 2.43 | 5.30 | -2.62 |
| 8 | 2.00 | 5.30 | -3.05 |
| 9 | 1.03 | 5.30 | -4.03 |
| 10 | 1.29 | 5.30 | -3.76 |
| 11 | 6.30 | 5.30 | 1.25 |
| 12 | 15.39 | 5.30 | 10.34 |

Water Availability Profile

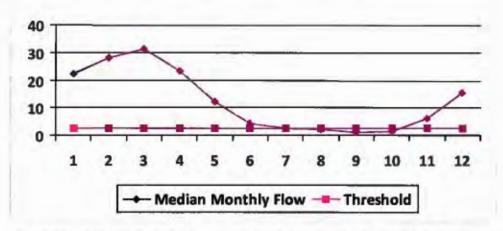


| Min. Gauge Reading (cfs): Passby at Location (cfs): | 69.73 |
|--|-------|
| Ungauged Stream Safety (cfs): | 0.51 |
| Headwater Safety (cfs): | 0.51 |
| Pump rate (cfs): | 2.23 |
| Downstream Demand (cfs): | 0.00 |
| Upstream Demand (cfs): | 0.00 |
| Base Threshold (cfs): | 2.05 |

| ource ID: 31200 Source Name | Buckeye Creek @ Powell Withdrawal | Source Latitude: 39. | 277142 |
|--|--|---|--|
| The same of the sa | Dennis Powell | Source Longitude: -80 | de lastage de la company de la |
| Drainage Area (sq. mi.): ☐ Endangered Species? ✓ N | 31.15 County: Doddridge Jussel Stream? Just 37 | Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): | 8/29/2013 8/29/2014 7,210,000 1,000 |
| Proximate PSD? Gauged Stream? | | Max, Simultaneou Max, Truck Jump ra | |

| Month | Median monthly flow (cfs) | Threshold (+ pump | Available water (cfs) |
|-------|---------------------------------|----------------------|--|
| 1 | 33.41 | 6.82 | 26.95 |
| 2 | 42.02 | 6.82 | 35.56 |
| 3 | 47.02 | 6.82 | 40.56 |
| 4 | 34.92 | 6.82 | 28.45 |
| 5 | 18.42 | 6.82 | 11.96 |
| 6 | 6.43 | 6.82 | -0.03 |
| 7 | 3.64 | 6.82 | -2.82 |
| 8 | 3.00 | 6.82 | -3.46 |
| 9 | 1.53 | 6.82 | -4.92 |
| 10 | 1.93 | 6.82 | -4.53 |
| 11 | 9.42 | 6.82 | 2.96 |
| 12 | 23.01 | 6.82 | 16.55 |
| | | | and the second s |

Water Availability Profile

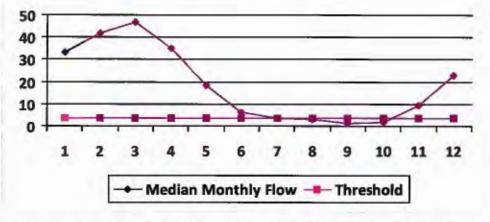


Water Availability Assessment of Location

| Min. Gauge Reading (cfs): Passby at Location (cfs): | 69.73 4.59 |
|---|---------------|
| Ungauged Stream Safety (cfs): | 0.77 |
| Headwater Safety (cfs): | 0.77 |
| Pump rate (cfs): | 2.23 |
| Downstream Demand (cfs): | 0.00 |
| Upstream Demand (cfs): | 0.00 |
| Base Threshold (cfs): | 3.06 |

| Source ID: 31201 Source Name | South Fork of Hughes River @ Knigh Tracy C. Knight & Stephanie C. Knigh | the state of the s | .198369 0.870969 |
|--|--|--|---------------------|
| Drainage Area (sq. mi.): Endangered Species? M | 16.26 County: Ritchie ussel Stream? | Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneo Max. Truck pump r | |
| Reference Gaug 3155 Drainage Area (sq. mi.) | 220 SOUTH FORK HUGHES RIVER 229.00 | R BELOW MACFARLAN, WV | 22 |

| Month | Median monthly flow (cfs) | Threshold (+ pump | | Available water (cfs) |
|-------|---------------------------------|----------------------|----|--------------------------|
| 1 | 45.67 | 14.26 | | 31.44 |
| 2 | 59.55 | 14.26 | | 45.31 |
| 3 | 65.21 | 14.26 | | 50.97 |
| 4 | 36.87 | 14.26 | | 22.63 |
| 5 | 25.86 | 14.26 | | 11.63 |
| 6 | 13.90 | 14.26 | | -0.33 |
| 7 | 6.89 | 14.26 | | -7.34 |
| 8 | 3.98 | 14.26 | | -10.25 |
| 9 | 4.79 | 14.26 | | -9.45 |
| 10 | 5.20 | 14.26 | | -9.04 |
| 11 | 15.54 | 14.26 | 1 | 1.30 |
| 12 | 32.06 | 14.26 | -1 | 17.82 |
| | | | | |

Water Availability Profile

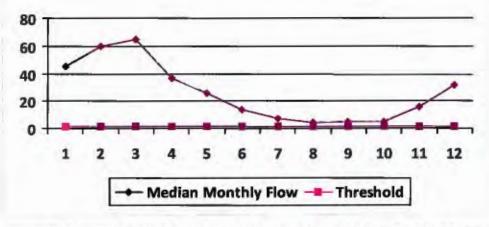

Water Availability Assessment of Location

| Min. Gauge Reading (cfs): Passby at Location (cfs): | 39.80 |
|---|-------|
| Ungauged Stream Safety (cfs): | 0.00 |
| Headwater Safety (cfs): | 0.39 |
| Pump rate (cfs): | 6.68 |
| Downstream Demand (cfs): | 0.00 |
| Upstream Demand (cfs): | 5.62 |
| Base Threshold (cfs): | 1.56 |

WMP-01679

API/ID Number:

047-017-06418

Operator:

Antero Resources

Dufflemeyer Unit 1H

Source ID: 31202

Source Name North Fork of Hughes River @ Davis Withdrawal

Source Latitude: 39.322363

Lewis P. Davis and Norma J. Davis

5030203

County:

Anticipated withdrawal start date: Ritchie

Source Longitude: -80.936771

HUC-8 Code:

Drainage Area (sq. mi.): 15.18

8/29/2013

✓ Endangered Species? ✓ Mussel Stream? Anticipated withdrawal end date:

8/29/2014

☐ Trout Stream?

Reference Gaug

Total Volume from Source (gal):

7,210,000

Regulated Stream?

Tier 3?

1,000 Max. Pump rate (gpm):

Max. Truck pump rate (gpm)

Proximate PSD?

Max. Simultaneous Trucks:

Ò

☐ Gauged Stream?

3155220

SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV

Drainage Area (sq. mi.)


229.00

Gauge Threshold (cfs):

22

| Month | Median monthly flow (cfs) | Threshold (+ pump | Available water (cfs) |
|-------|---------------------------------|----------------------|--------------------------|
| 1 | 42.64 | 4.42 | 38.36 |
| 2 | 55.59 | 4.42 | 51.32 |
| 3 | 60.88 | 4.42 | 56.60 |
| 4 | 34.42 | 4.42 | 30.14 |
| 5 | 24.15 | 4.42 | 19.87 |
| 6 | 12.98 | 4.42 | 8.70 |
| 7 | 6.44 | 4.42 | 2.16 |
| 8 | 3.72 | 4.42 | -0.56 |
| 9 | 4.47 | 4.42 | 0.19 |
| 10 | 4.85 | 4.42 | 0.57 |
| 11 | 14.50 | 4.42 | 10.23 |
| 12 | 29.93 | 4.42 | 25.65 |

Water Availability Profile

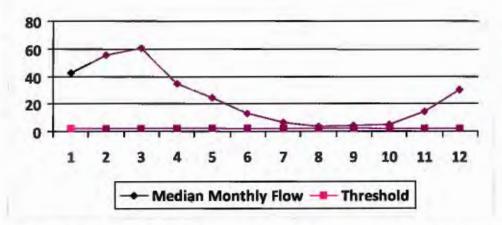

Mater Availability Assessment of Las

| Min. Gauge Reading (cfs): Passby at Location (cfs): | 35.23 |
|--|-------|
| Ungauged Stream Safety (cfs): | 0.36 |
| Headwater Safety (cfs): | 0.36 |
| Pump rate (cfs): | 2.23 |
| Downstream Demand (cfs): | 0.00 |
| Upstream Demand (cfs): | 0.00 |
| Base Threshold (cfs): | 1.46 |

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01679

API/ID Number

047-017-06418

Operator:

Antero Resources

Dufflemeyer Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- ·For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 31207 Source Name

City of Salem Reservior (Lower Dog Run)

Public Water Provider

Source start date:

8/29/2013

Source end date:

8/29/2014

Source Lat:

39.28834

Source Long:

County -80.54966

Harrison

7,210,000

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

Dufflemeyer Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- · For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 31208 Source Name Pennsboro Lake 8/29/2013 Source start date: 8/29/2014 Source end date: 39.281689 -80.925526 Source Long: County Ritchie 7,210,000 Max. Daily Purchase (gal) Total Volume from Source (gal):

DEP Comments:

Source ID: 31209 Source Name Powers Lake (Wilderness Water Park Dam) 8/29/2013 Source start date: Private Owner 8/29/2014 Source end date: Source Lat: 39.255752 Source Long: -80.463262 Harrison County Max. Daily Purchase (gal)

DEP Comments:

Total Volume from Source (gal):

7,210,000

WMP-01679

API/ID Number

047-017-06418

Operator:

Antero Resources

Dufflemeyer Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source Long:

Source ID: 31210 Source Name Powers Lake Two

Source start date:

8/29/2013

Source end date:

8/29/2014

Source Lat: 39.247604

-80.466642

County

Harrison

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,210,000

WMP-01679

API/ID Number

047-017-06418

Operator:

Antero Resources

Dufflemeyer Unit 1H

important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- · For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Other

Source ID: 31211 Source Name

Source lat:

Poth Lake (Landowner Pond)

Source start date: Source end date: 8/29/2013

8/29/2014

Private Owner

39.221306

-80.463028

County

Harrison

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,210,000

DEP Comments:

Source ID: 31212 Source Name

Williamson Pond (Landowner Pond)

Source start date:

8/29/2013

Source end date:

8/29/2014

Source Lat:

39.19924

Source Long:

Source Long:

-80.886161

County

Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,210,000

Dufflemeyer Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- · For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source Long:

Eddy Pond (Landowner Pond) Source ID: 31213 Source Name

Source start date:

8/29/2013

Source end date:

County

8/29/2014 Ritchie

Max. Daily Purchase (gal)

Source Lat:

Total Volume from Source (gal):

7,210,000

DEP Comments:

Source ID: 31214 Source Name

Hog Lick Quarry

39.419272

39.19924

Industrial Facility

-80.217941

-80.886161

Source end date:

8/29/2013 8/29/2014

Marion County

Source start date:

Max. Daily Purchase (gal)

Source Lat:

1,000,000

Source Long:

Total Volume from Source (gal):

7,210,000

Dufflemeyer Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 31215 Source Name

Source Lat:

Glade Fork Mine

38.965767

Source start date: Source end date:

8/29/2013 8/29/2014

Industrial Facility

Source Long:

-80.299313

County

Upshur

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

7,210,000

DEP Comments:

Recycled Frac Water

Source ID: 31216 Source Name

Source start date:

8/29/2013

Source end date:

8/29/2014

Source Lat:

Max. Daily Purchase (gal)

Source Long:


County

Total Volume from Source (gai):

7,210,000

DEP Comments:

Sources include, but are not limited to: Kelley Unit 2H

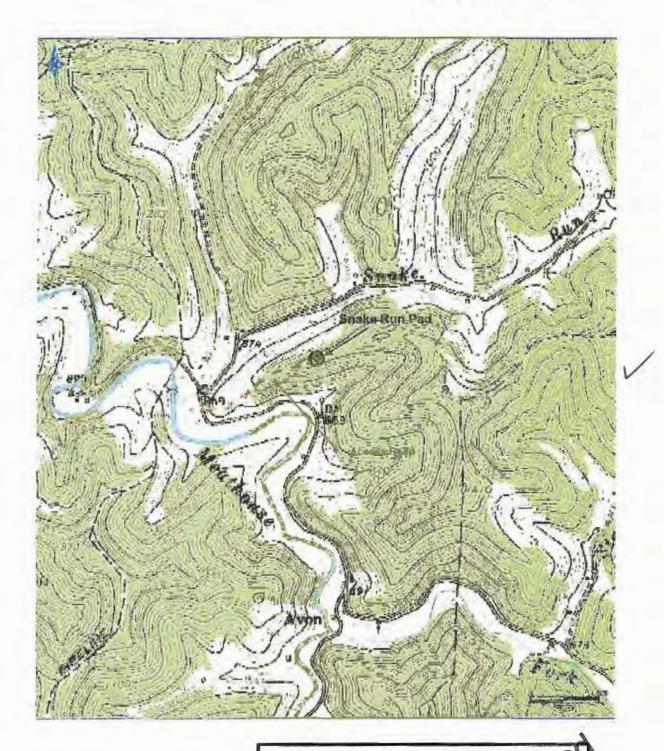

Antero Resources Corporation Appalachian Basin Dufflemeyer Unit

Doddridge County

Quadrangle: New Milton Watershed: Meathouse Fork District: New Milton Date: 11-1-2013

and Gas Innertal Projection

