

#### west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

January 21, 2015

### WELL WORK PERMIT Horizontal 6A Well

This permit, API Well Number: 47-1706670, issued to ANTERO RESOURCES CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: CONVAIR UNIT 1H

Farm Name: ALEXANDER, MATTHEW W. & N

API Well Number: 47-1706670

Permit Type: Horizontal 6A Well

Date Issued: 01/21/2015

API Number:

#### PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

#### **CONDITIONS**

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACE). Through this permit, you are hereby being advised to consult with USACE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.
- 9. Operator shall provide the Office of Oil & Gas notification of the date that drilling commenced on this well. Such notice shall be provided by sending an email to DEPOOGNotify@wy.gov within 30 days of commencement of drilling.

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

			1	8	671
1) Well Operator: Antero Resou	rces Corporation	494488557	017-Doddridge	West Union	West Union
		Operator ID	County	District	Quadrangle
2) Operator's Well Number: Cor	vair Unit 1H	Well Pac	l Name: Alexar	nder Pad	
3) Farm Name/Surface Owner:	Matthew W. Alexander & Linda	M. Muhly Public Roa	d Access: CR	28	
4) Elevation, current ground:	-1210' Ele	evation, proposed	post-construction	on: 1181'	
5) Well Type (a) Gas Other	Oil	Unde	erground Storag	e	
(b)If Gas Shal	low	Deep			10.74.20
	zontal _				112.74
6) Existing Pad: Yes or No No		eraitted	<del>-</del> :		*
<ol> <li>Proposed Target Formation(s)</li> <li>Marcellus Shale: 7500' TVD, Anti</li> </ol>	n a nas	T.		Pressure(s):	
8) Proposed Total Vertical Depth	: 7500' TVD				
9) Formation at Total Vertical De	epth: Marcellus S	Shale			
10) Proposed Total Measured De	pth: 16,500' MD				
11) Proposed Horizontal Leg Ler	ngth: 8302'				
12) Approximate Fresh Water St	rata Depths:	292', 297' 455'			
13) Method to Determine Fresh	Water Depths:	Offset well records. De	pths have been ad	justed accord	ing to surface elevation
14) Approximate Saltwater Dept	hs: 1319', 1896',	2061'			
15) Approximate Coal Seam Dep	oths: 677', 839'				
16) Approximate Depth to Possil	ole Void (coal mi	ne, karst, other):	None anticipated		
17) Does Proposed well location directly overlying or adjacent to		Yes	No	<b>√</b>	
(a) If Yes, provide Mine Info:	Name:				
	Depth:				
	Seam:				
Received Office of Oil & Gas	Owner:				
OCT 3 1 2014					

18)

## CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill-up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	505'	505' *see #19	CTS, 702 Cu. Ft
Coal	9-5/8"	New	J-55	36#	2450'	2450'	CTS, 998 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	16500'	16500'	4145 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7100'	
Liners							

DC 29-2014

TYPE	Size	Wellbore	Wall	Burst Pressure	Cement Type	Cement Yield
		<u>Diameter</u>	<u>Thickness</u>			(cu. ft./k)
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

## **PACKERS**

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A eived	

Office of Oil & Gas

OCT 3 1 2014

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:
Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale.
*Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered.
20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:
Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well."
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 24.39 acres
22) Area to be disturbed for well pad only, less access road (acres):  6.03 acres
23) Describe centralizer placement for each casing string:
Conductor: no centralizers Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th joint spaced up the hole to surface. Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th collar to surface. Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casing.
24) Describe all cement additives associated with each cement type:
Conductor: no additives, Class A cement.  Surface: Class A cement with 2-3% calcium chloride and 1/4 lb flake Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of clay treat Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51 Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20

#### 25) Proposed borehole conditioning procedures:

Conductor: blowhole clean with air, run casing, 10 bbls fresh water.

Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.

Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate 40 bbls brine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to base of curve, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

Office of Oil & Gas

<sup>\*</sup>Note: Attach additional sheets as needed.

API Number 47 -	017	-	
Operator's	Well No	Convair Unit 1H	

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

#### FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name	Antero Resources Corporation	OP Code
Watershed (HUC	10) Nutter Fork of Middle Island Creek Quad	rangle West Union
Elevation _1181'	County_Doddridge	District West Union
Will a pit be used		posed well work? Yes No III  ling and Flowback Fluids will be stored in tanks. Cuttings will be tanked and hauled off site.)  If so, what ml.? N/A
Will a sy	onthetic liner be used in the pit? Yes No	If so, what ml.? N/A
	d Disposal Method For Treated Pit Wastes:	10
	Land Application Underground Injection ( UIC Permit Number_ Reuse (at API Number_ Future permitted well location Off Site Disposal (Supply form WW-9 for disposal (Explain_	s when applicable. API# will be provided on Form WR-34 oosal location) (Meadowfill Landfill Permit #SWF-1032-98)
Will closed loop s	system be used? If so, describe: Yes	
Drilling medium	anticipated for this well (vertical and horizontal)? Air, for	Surface - Air/Freshwater, intermediate - eeshwater, oil based, etc. Dutt/Stiff Foam, Production - Water Based Mud
	200 D	
Additives to be us	sed in drilling medium? Please See Attachment	
	posal method? Leave in pit, landfill, removed offsite, etc	Stored in tanks, removed offsite and taken to landfill.
	n pit and plan to solidify what medium will be used? (ce	
	l or offsite name/permit number? Meadowfill Landfill (Permit	
on August 1, 200 provisions of the law or regulation I certify application form obtaining the inf	5, by the Office of Oil and Gas of the West Virginia Depermit are enforceable by law. Violations of any term can lead to enforcement action. under penalty of law that I have personally examined and all attachments thereto and that, based on my	of the GENERAL WATER POLLUTION PERMIT issued artment of Environmental Protection. I understand that the or condition of the general permit and/or other applicable I and am familiar with the information submitted on this inquiry of those individuals immediately responsible for ate, and complete. I am aware that there are significant or imprisonment.
Company Officia	I Signature // Company of the state of the s	KARAQUE
Company Officia	l (Typed Name) Evan Foster	NOTARY PUBLIC  NOTARY PUBLIC  NOTARY PO COLOR
Company Officia	l TitleEnvironmental Representative	NOTARY PUBLIC  NOTARY ID 2014 PROCEIVED  OMMISSION EXPIRE PROCEIVED  Office of Oil & Gas
		CAPIRETIES
Subscribed and s	worn before me this 24 day of 0Ctob	W1646
	Mackub	Notary Public OCT 3 1 2014
My commission of	expires JULY 21, 2018	01/23/2015

opos	sed Revegetation Tre	atment: Acres Disturbed 24.3	39	Prevegetation pH	
	Lime 2-3	Tons/acre or to correct to	<sub>pH</sub> 6.5		
		or straw or Wood Fiber (will be us			
	Fertilizer amount_		lbs/acre		
	Mulch 2-3				
ator C		1 C exiliary Pad (2.59) + Access Road (8.96) + Sta	ons/acre	parial/Tancail Spail Areas (4.85) + CP 28	Improvements (0.96) = 24.30 Agra
aici c	omaniment Pad (0.03) + Au		Seed Mixtures	erran/1 opsoil Spoil Areas (4.85) + CR 28.	miprovements (0.90) = 24.39 Acre
	Т	emporary		Permanent	
	Seed Type	lbs/acre		Seed Type	lbs/acre
all	l Fescue	45	Pere	ennial Rye Grass	20
tach					d by surface owner
awii ovid otoc	ng(s) of road, locationed) copied section of invo	n, pit and proposed area for land			ng this info have been
awii ovid otoc	ng(s) of road, locationed) copied section of invo				ng this info have been
awii ovid otoc	ng(s) of road, location ed)  copied section of involution approved by: Date of the section of th	olved 7.5' topographic sheet.			ng this info have been

#### Form WW-9 Additives Attachment

#### **SURFACE INTERVAL**

- 1. Fresh Water
- 2. Soap -Foamer AC
- 3. Air

#### **INTERMEDIATE INTERVAL**

#### STIFF FOAM RECIPE:

- 1) 1 ppb Soda Ash / Sodium Carbonate-Alkalinity Control Agent
- 2) 1 ppb Conqor 404 (11.76 ppg) / Corrosion Inhibitor
- 3) 4 ppb KLA-Gard (9.17 ppg) / Amine Acid Complex-Shale Stabilizer
- 4) 1ppb Mil Pac R / Sodium Carboxymethylcellulose-Filtration Control Agent
- 5) 12 ppb KCL / Potassium Chloride-inorganic Salt
- 6) Fresh Water 80 bbls
- 7) Air

#### **PRODUCTION INTERVAL**

1. Alpha 1655

Salt Inhibitor

2. Mil-Carb

Calcium Carbonate

3. Cottonseed Hulls

Cellulose-Cottonseed Pellets - LCM

4. Mil-Seal

Vegetable, Cotton & Cellulose-Based Fiber Blend - LCM

5. Clay-Trol

Amine Acid Complex – Shale Stabilizer

6. Xan-Plex

Viscosifier For Water Based Muds

7. Mil-Pac (All Grades)

Sodium Carboxymethylcellulose - Filtration Control Agent

8. New Drill

Anionic Polyacrylamide Copolymer Emulsion - Shale Stabilizer

9. Caustic Soda

Sodium Hydroxide - Alkalinity Control

10. Mil-Lime

Calcium Hydroxide - Lime

11. LD-9

Polyether Polyol – Drilling Fluid Defoamer

12. Mil Mica

Hydro-Biotite Mica – LCM

Received
Office of Oil & Gas
OCT 3 1 2014

13. Escaid 110

Drilling Fluild Solvent – Aliphatic Hydrocarbon

14. Ligco

Highly Oxidized Leonardite - Filteration Control Agent

15. Super Sweep

Polypropylene - Hole Cleaning Agent

16. Sulfatrol K

Drilling Fluid Additive - Sulfonated Asphalt Residuum

17. Sodium Chloride, Anhydrous

**Inorganic Salt** 

18. D-D

Drilling Detergent - Surfactant

19. Terra-Rate

Organic Surfactant Blend

20. W.O. Defoam

Alcohol-Based Defoamer

21. Perma-Lose HT

Fluid Loss Reducer For Water-Based Muds

22. Xan-Plex D

Polysaccharide Polymer - Drilling Fluid Viscosifier

23. Walnut Shells

Ground Cellulosic Material - Ground Walnut Shells - LCM

24. Mil-Graphite

Natural Graphite - LCM

25. Mil Bar

Barite - Weighting Agent

26. X-Cide 102

Biocide

27. Soda Ash

Sodium Carbonate - Alkalinity Control Agent

28. Clay Trol

Amine Acid complex - Shale Stabilizer

29. Sulfatrol

Sulfonated Asphalt - Shale Control Additive

30. Xanvis

Viscosifier For Water-Based Muds

31. Milstarch

Starch - Fluid Loss Reducer For Water Based Muds

32. Mil-Lube

**Drilling Fluid Lubricant** 

Received
Office of Oil & Gas

OCT 3 1 2014



# Well Site Safety Plan Antero Resources

Well Name: Northrop Unit 1H, Northrop Unit 2H, Scorpio

Unit 1H, Scorpio Unit 2H, Convair Unit 1H, Convair Unit 2H, Edgar Unit 1H, Edgar Unit 2H

Pad Location: ALEXANDER PAD

Doddridge County/ West Union District

GPS Coordinates: Lat 39°20′09.01"/Long 80°46′31.69" (NAD83)

# **Driving Directions:**

From intersection of WV-18 and HWY 50 (exit for West Union, WV), turn off of HWY 50 onto WV-18 N and follow for ~0.6 miles. When you come to a T at Main Street, turn right. Take your first left immediately after the bridge onto Davis Street/Old U.S. 50 W and follow for 0.4 miles. Take the 2<sup>nd</sup> right onto WV-18 N/Sistersville Pike and follow for ~5.1 miles. You will pass Crystal Lake on the right. Turn right onto Nutter Fork Road and follow for ~2.15 miles. Access road will be on left approximately 0.35 miles after Wolfpen Run.


EMERGENCY (24 HOUR) CONTACT 1-800-878-1373

Received

Qui -20M

Received Office of Oil & Gas

OCT 3 1 2014

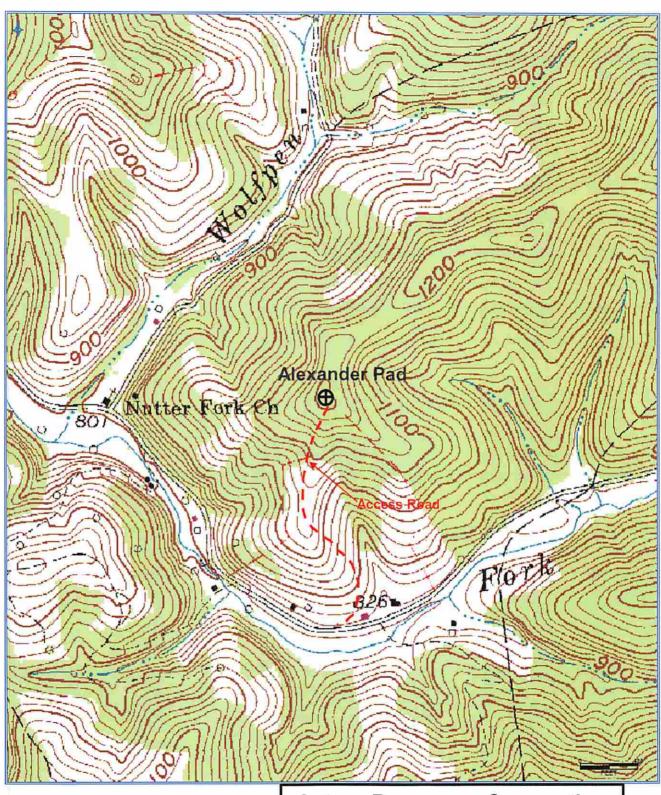

Received Office of Oil & Gas 0CT 3 1 2014

# **Antero Resources Corporation**

Appalachian Basin Convair Unit 1H Doddridge County

Quadrangle: West Union Watershed: Middle Island Creek

District: West Union Date: 6-2-2014

