

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

July 23, 2015

WELL WORK PERMIT Horizontal 6A Well

This permit, API Well Number: 47-900156, issued to SWN PRODUCTION COMPANY, LLC, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

Saures Martin

Operator's Well No: LINDA GREATHOUSE BRK 205H

Farm Name: GREATHOUSE, LINDA REEVES

API Well Number: 47-900156

Permit Type: Horizontal 6A Well

Date Issued: 07/23/2015

API Number: 900156

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- This proposed activity may require permit coverage from the United States Army Corps of Engineers
 (USACE). Through this permit, you are hereby being advised to consult with USACE regarding this proposed
 activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than one hundred (100) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.
- 9. Operator shall provide the Office of Oil & Gas notification of the date that drilling commenced on this well. Such notice shall be provided by sending an email to DEPOOGNotify@wv.gov within 30 days of commencement of drilling.

PI	NO. 47-69 -		
	OPERATOR WELL	NO.	Unita Greathouse BRX 2019-
	Wall Pad Name	Linda	Greatherice RDV Day

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operator	SWN Prod	uction Co., LLC	494512924	009-Brooke	1-Buffalo 247	-Bethany
,			Operator ID	County		drangle
2) Operator's We	ell Number: Lir	nda Greathouse Bf	RK 205H Well P	ad Name: Linda	Greathouse B	RK Pad
3) Farm Name/S	urface Owner:	Linda Reeves Grea	thouse Public Re	ad Access: Huk	ill Run Road	
4) Elevation, cur	rent ground:	1138' El	evation, propose	d post-construction	on: 1138'	
5) Well Type (a) Gas x	Oil	Un	derground Storag	ge	
	Other					
(A STATE OF THE STA	allow x	Deep			d.
6) Evicting Pod.	200	rizontal x				~ -
6) Existing Pad:), Depth(s), Antic	instad Thisbasse		2	7
		et Top TVD-5822', Ta				ed Pressure- 3784
8) Proposed Tota	A STATE OF THE PARTY OF	e washing to				
9) Formation at 7						
10) Proposed Tot	al Measured D	epth: 14,471'				
11) Proposed Ho	rizontal Leg Le	ngth: 1338'				
12) Approximate	Fresh Water S	trata Depths:	62', 94', & 300			
13) Method to De	etermine Fresh	Water Depths: f	rom nearby wat	er wells		
14) Approximate	Saltwater Dep	ths: 1025'				
15) Approximate	Coal Seam De	pths: 303'				
(6) Approximate	Depth to Possi	ble Void (coal mi	ne, karst, other):	Void Expected	from 300'-307'	
17) Does Propose directly overlying		contain coal seam an active mine?	ns Yes	No.	x	
(a) If Yes, provi	ide Mine Info:	Name:				
		Depth:				
		Seam:				
		Owner:				

Page 1 of 3

RECEIVED Office of Oil and Gas

JUL 1 7 2015

Well Pad Name: Linda Greathcuse BRK Pad

18)

CASING AND TUBING PROGRAM

TYPE	Size (in)	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling (ft)	INTERVALS: Left in Well (ft)	CEMENT: Fill-up (Cu. Ft.)/CTS
Conductor	20"	New	H-40	94#	125'	125'	CTS
Fresh Water	13 3/8*	New	J-55	54.5#	450'	450'	446 sx/CTS
Coal	9 5/8"	New	J-55	40#	2075'	2075'	807 sx/CTS
Intermediate	7"	New	J-55	20#	If Needed	If Needed	If Needed/As Needed
Production	5 1/2"	New	HCP-110	20#	14,471'	14,471'	Land \$37 or tall 1885 and \$7 instantion
Tubing	2 3/8'	New	P-110	4.7#	Approx. 5,875'	Approx. 5,875	
Liners						1	

E. BRO 7/14/15

TYPE	Size (in)	Wellbore Diameter (in)	Wall Thickness (in)	Burst Pressure (psi)	Max. Associated Surface Pressure (psi)	Cement Type	Cement Yield (cu. ft./k)
Conductor	20"	30"	0.25	2120	81	Class A	1.19/50% Excess
Fresh Water	13 3/8"	17.5"	0.380	2740	633	Class A	1.19/50% Excess
Coal	9 5/8"	12 1/4"	0.395	3950	1768	Class A	1.19/50% Excess
Intermediate	7"	8 3/4"	0.317	4360	3250	Class A	1.20/15% Excess
Production	5 1/2"	8 3/4"	0.361	12360	9500	Class A	1.20/15% Excess
Tubing	2 3/8"	4.778"	0.190				
Liners							

PACKERS

Kind:	10K Arrowset AS1-X	
Sizes:	5 1/2"	
Depths Set:		

Page 2 of 3

RECEIVED Office of Oil and Gas

JUL 1 7 2015

WV Department of Environmer 07/24/2016n

WW-6B	
(10/14)	

API NO. 47-69 OPERATOR WELL NO. LINCO GREED BOK 205H
Well Pad Name: Linda Greathouse BRK Pad

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:

Drill and stimulate any potential zones between and including the Benson to Marcellus. **If we should encounter a void place basket above and below void area- balance cement to bottom of void and grout from basket to surface. Run casing not less than 20' below void nor more than 50'-70' below void. (*If freshwater is encountered deeper than anticipated it must be protected, set casing 50'-70' below and cts.)

20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:

Well will be perforated within the target formation and stimulated with a slurry of water, sand, and chemical additives at a high rate. This will be performed in stages with the plug and perf method along the wellbore until the entire lateral has been stimulated within the target formation. All stage plugs are then drilled out and the well is flowed back to surface. The well is produced through surface facilities consisting of high pressure production unites, vertical separation units, water and oil storage tanks. Max press and anticipated max rate- 9000 lbs @ 80 barrels a minute.

- 21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 29.7
- 22) Area to be disturbed for well pad only, less access road (acres): 9.4
- 23) Describe centralizer placement for each casing string:

All casing strings will be ran with a centralizer at a minimum of 1 per every 3 joints of casing.

24) Describe all cement additives associated with each cement type:

See Attachment ***


25) Proposed borehole conditioning procedures:

RECEIVED

All boreholes will be conditioned with circulation and rotation for a notation of bases of the sup and continuing until operator is satisfied with borehole conditions.

APR 1 5 2015

^{*}Note: Attach additional sheets as needed.

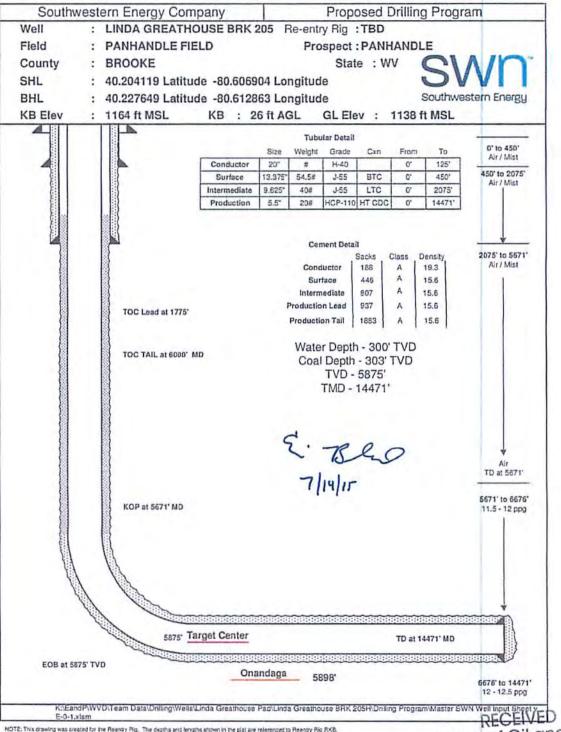

NOTE: This drawing was created for the Reently Rig. The depths and lengths shown in the plat are referenced to Reently Rig RXB.

Office of Oil and Gas

JUL 17 2015

WV Department of Environmental Protection

No More than 3% CaCl will be used in Surface String **SLB Cement Additives**

***Ref: 2013-78

	Product Name	Product Use	Chemical Name	CAS Number
	2010		Fuller's earth (attapulgite)	8031-18-3
	D046	antifoam	Polypropylene glycol	25322-69-4
	D130	polyester flake - lcm	polyethylene terephthalate	25038-59-9
	S001	calcium chloride	calcium chloride	10043-52-4
9	SPACER			
13	D130	polyester flake - lcm	polyethylene terephthalate	25038-59-9
Surface	D020	bentonite extender	bentonite	1302-78-9
	5040	antifoam	Fuller's earth (attapulgite)	8031-18-3
	D046		Polypropylene glycol	25322-69-4
te	D130	polyester flake - lcm	polyethylene terephthalate	25038-59-9
	D044	granulated salt	sodium chloride	7647-14-5
	D153	Anti-Settling Agent	chrystalline silica	14808-60-7
Intermediate	SPACER			
E	D020	bentonite extender	bentonite	1302-78-9
<u> </u>	D130	polyester flake - lcm	polyethylene terephthalate	25038-59-9
_	D080	cement liquid dispersant	product classified as non-hazardous.	
	D801	mid-temp retarder	product classified as non-hazardous	
	D047	antifoam agent	polypropylene glycol	25322-69-4
	SPACER			
	B389	MUDPUSH* Express	Carbohydrate	proprietary
	D206	Antifoaming Agent	Silica Organic Polymer	proprietary
D.	D031	barite	barium sulfate	7727-43-7
P			fatty acid amine	proprietary
#			ethoxylated alcohol	proprietary
Kick Off Plug		Carrier and the second	glycerol	56-81-5
Ϋ́	B220	surfactant	2.2'-Iminodiethanol	111-42-2
_	D167	UNIFLAC* S	aliphatic amide polymer	proprietary

RECEIVED
Office of Oil and Gas

RECEIVED Office of Oil and Gas JUL 7 50 WV Department of Environmental Projection

D1	154	low-temperature extender	non-crystalline silica	7631-86-9
<u> </u>	100	EasyBLOK	boric acid	10043-35-3
Lead CO	246	antifoam	Fuller's earth (attapulgite)	8031-18-3
مما خ	046	rantiroam	Polypropylene glycol	25322-69-4
	D201 basic cements enabler		chrystalline silica	14808-60-7
D2 D2	201	basic cements enabler	metal oxide	proprietary
ᇫ	200	low-temperature solid	sulphonated synthetic polymer	proprietary
£ 102	202	dispersant	formaldehyde (impurity)	50-00-0
-	240		Fuller's earth (attapuigite)	8031-18-3
المال	046	antifoam	Polypropylene glycol	25322-69-4
D1	167	UNIFLAC* S	aliphatic amide polymer	proprietary
DO	065	TIC* Dispersant	Sodium Polynaphthalene Sulfonate	9008-63-3
1			Sodium Sulfate	7757-82-6
- I	204	basic cements enabler	chrystalline silica	14808-60-7
102	201	basic cements enabler	metal oxide	proprietary
<u>D1</u>	153	Anti-Settling Agent	chrystalline silica	14808-60-7
SF	PACER			
В3	389	MUDPUSH* Express	Carbohydrate	proprietary
D2	206	Antifoaming Agent	Silica Organic Polymer	proprietary
DC	031	barite	barium sulfate	7727-43-7
			fatty acid amine	proprietary
			ethoxylated alcohol	proprietary
			glycerol	56-81-5
B2	220	surfactant	2.2'-Iminodiethanol	111-42-2

WV Department of Environmental Protection JUL 17 206

% Concentration Used
0.2% BWOC
0.125 lb/sk
2% BWOC
1 lb/bbl
20 lb/bbl

0,2% BWOC
0.405 11 4 4
0.125 lb/sk
10% BWOW
0.15% BWOC
20 lb/bbl
1 lb/bbl
,
0.05 gal/sk
0.01 gal/sk
0.02 gal/sk
1 lb/bbi
0.1 gal/bbl
310 lb/bbl
1 col/bbl
1 gal/bbi
0.35% BWOC
0.0070 01700

RECEIVED
Office of Oil and Gas

6% BWOC
0.8% BWOC
0.2% BWOC
0.2% BWOC
0.3% BWOC
0.2% BWOC
0.35% BWOC
0.25% BWOC
0.2% BWOC
0.2% BWOC
proprietary
proprietary
7727-43-7
proprietary
proprietary
56-81-5
111-42-2

RECEIVED
Office of Oil and Gas

Office or can and control of the con

; ·

API Number 47 -	69		
Operator's	Well No.	Linda Greathouse BRK 205H	


STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name SWN Production Co., LLC			OP Code 494512924
Watershed (HUC 10) Upper Ohio South		Quadrangle _	247-Bethany
Elevation 1138	County_009-Brooke		District 1-Buffalo
Do you anticipate using more than 5,000 to Will a pit be used? Yes No	\checkmark		ell work? Yes No No listime-cuttings will be taken to a permitted landfill.
If so, please describe anticipated Will a synthetic liner be used in t	pit waste.		o, what ml.?
Proposed Disposal Method For T		11 80	o, what mi.?
Land Application			
Underground In	njection (UIC Permit Num	ber 2D007253	39/ 2D0413175/ 2D0610306/ 2D0610317
			ded with the WR-34/DDMR &/or permit addendum.
Off Site Dispos	sal (Supply form WW-9 for flow back fluids will be put in	r disposal loca steel tanks and	ation) It reused or taken to a permitted disposal facility.
Will closed loop system be used? If so, do	escribe:Yes		
Drilling medium anticipated for this well ((vertical and horizontal)? A	Air, freshwater	, oil based, etc. Air drill to KOP, Fluid drill with SOBM from KOP to TD
-If oil based, what type? Synthet	ic, petroleum, etc.Synthetic C	il Base	
Additives to be used in drilling medium?	see attached sheets		
Drill cuttings disposal method? Leave in	pit, landfill, removed offsite	e, etc. landfill	
-If left in pit and plan to solidify	what medium will be used?	(cement, lim	e, sawdust)
Arden Landfill 10072, American	02-12954, Country (Mide 383Ai	
on August 1, 2005, by the Office of Oil an provisions of the permit are enforceable blaw or regulation can lead to enforcement I certify under penalty of law the	nd Gas of the West Virginia by law. Violations of any action. that I have personally exam	Department of term or conditions nined and am	sheral water pollution permit issued of Environmental Protection. I understand that the tion of the general permit and/or other applicable familiar with the information school that the familiar with the information school that there are significant somment.
Company Official Signature			WV Department of
Company Official (Typed Name) Dee Sc	outhall		WV Dormental Process
Company Official Title Regulatory Super	visor		WV Department of Environmental Protection
Subscribed and sworn before me this A	7th day of MO	uch	OFFICIAL SEAL Notary Public, State of West Virginia BRITTANY R WOODY 3302 Old Elkins Road Buckhanner

SWN Production Co	15 2 2 2		
Proposed Revegetation Treatm	nent: Acres Disturbed 2	9.7 Prevegetatio	n pH
Lime as determined by pH test	Tons/acre or to corre	ct to pH 9.4	
Fertilizer type 10-20)-20		
Fertilizer amount_60	00	lbs/acre	
Mulch Hay/Stra		Tons/acre	
		Seed Mixtures	
Ten	nporary	Per	rmanent
Seed Type	lbs/acre	Seed Type	lbs/acre
White Grove	15	White Grove	15
Red Top	15	Red Top	15
Orchard Grass	20	Orchard Grass	20
Plan Approved by:	a Culest	loce	
			RECEIVED Office of Oil and Gas
			APR 1 5 2015
_{Fitle:} Oil and Gas Ins	spector	Date: 4/9/15	WV Department of Environmental Protection
Field Reviewed? (Yes () No	Ellano



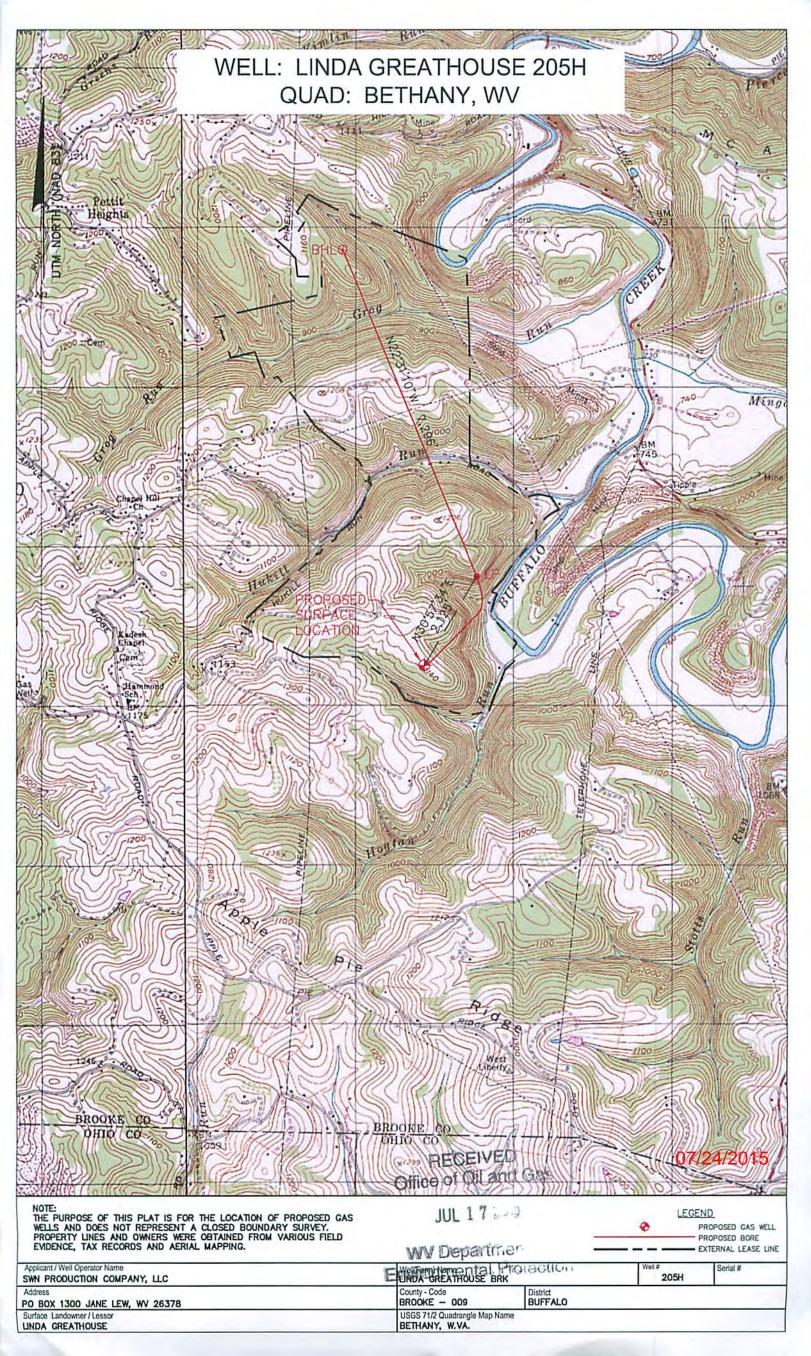

INFORMATION SUPPLIED UNDER WEST VIRGINIA CODE Chapter 22, Article 6A, Section 5(a)(5) IN LIEU OF FILING LEASE(S) AND OTHER CONTINUING CONTRACT(S)

Under the oath required to make the verification on page 1 of this Notice and Application, I depose and say that I am the person who signed the Notice and Application for the Applicant, and that -

- (1) the tract of land is the same tract described in this Application, partly or wholly depicted in the accompanying plat, and described in the Construction and Reclamation Plan;
- (2) the parties and recordation data (if recorded) for lease(s) or other continuing contract(s) by which the Applicant claims the right to extract, produce or market the oil or gas are as follows:

Lease Name or Number

Grantor, Lessor, etc.

Grantee, Lessee, etc.

Royalty

Book/Page

"SEE EXHIBIT A"

Acknowledgement of Possible Permitting/Approval In Addition to the Office of Oil and Gas

The permit applicant for the proposed well work addressed in this application hereby acknowledges the possibility of the need for permits and/or approvals from local, state, or federal entities in addition to the DEP, Office of Oil and Gas, including but not limited to the following:

- WV Division of Water and Waste Management
- WV Division of Natural Resources WV Division of Highways
- U.S. Army Corps of Engineers
- U.S. Fish and Wildlife Service
- County Floodplain Coordinator

RECEIVED
Office of Oil and Gas

APR 1 5 2015

The applicant further acknowledges that any Office of Oil and Gas permit in no way partition of nullifies the need for other permits/approvals that may be necessary in wind permits/approvals should be acquired from the appropriate authority before the affected activity is initiated.

Well Operator: SWN Production Company L.L.C

By:

Its:

Derek A. Thomas, Senior Landman

Page 1 of 1

Exhibit "A"

Attached hereto and made part of the State of West Virginia Oil and Gas Permit Form WW-6A1 by, SWN Production Company L.L.C. Operator

Greathouse North 205H

Brooke County/WV

5)	B37-88	1-342849-001	Matthew H Fair	Chesapeake Appalachia, L.L.C.	18%	17/278
			Chesapeake Appalachia, L.L.C	SWN Production Company, L.L.C.		30/480
		1-342849-002	Susan S. Fair	Chesapeake Appalachia, L.L.C.	18%	17/266
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
		1-342849-003	Diane Courtwright	Chesapeake Appalachia, L.L.C	18%	17/272
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
		1-342849-004	Debra R. & Robert Cyphert	Chesapeake Appalachia, L.L.C	18%	17/284
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
6)	B37-91	1-342849-001	Matthew H Fair	Chesapeake Appalachia, L.L.C.	18%	17/278
			Chesapeake Appalachia, L.L.C	SWN Production Company, L.L.C.		30/480
		1-342849-002	Susan S. Fair	Chesapeake Appalachia, L.L.C.	18%	17/266
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
		1-342849-003	Diane Courtwright	Chesapeake Appalachia, L.L.C	18%	17/27
		<u>u</u>	Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
	Š	\$ 42849-004	Debra R. & Robert Cyphert	Chesapeake Appalachia, L.L.C	18%	17/28
	ገጢ	Mic.	Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
	Tital !	Envis Department of Office				
	Pro	5 2 5 2 TH				
	æ Z G	US AND THE				
	₩ 9					

Exhibit "A"

Attached hereto and made part of the State of West Virginia Oil and Gas Permit Form WW-6A1 by, SWN Production Company L.L.C. Operator
Greathouse North 205H
Brooke County/WV

Tract #	Tax Parcel	Lease Number	Lessor	Lessee	Royalty	BK/PG
1)	B37-87	1-329275-001	Linda Reeves Greathouse	Chesapeake Appalachia, L.L.C.	18%	11/162
			Chesapeake Appalachia L.L.C.	SWN Production Company L.L.C.		30/480
		1-329275-001	Vicki Lynn Greathouse Hamilton	Chesapeake Appalachia L.L.C.	18%	11/162
			Chesapeake Appalachia L.L.C.	SWN Production Company L.L.C.		30/480
		1-342657-001	Kentucky Christian Univeristy, Inc.	Chesapeake Appalachia L.L.C.	18%	15/270
		a facility of the	Chesapeake Appalachia L.L.C.	SWN Production Company L.L.C.		30/480
2)	B42-60.02	WV0000358-000	Bounty Minerals L.L.C.	Chesapeake Appalachia, L.L.C.	18%	29/58
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
3)	B37-77	1-324220-001	Mary Jane Sandford	Great Lakes Energy Partners	14%	10/82
			Great Lakes Energy Partners	Range Resources, L.L.C		20/733
			Range Resources L.L.C.	Chesapeake Appalachia, L.L.C.		13/662
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
		1-324220-002	David Morris	Great Lakes Energy Partners	14%	10/79
			Great Lakes Energy Partners	Range Resources, L.L.C		20/733
			Range Resources L.L.C.	Chesapeake Appalachia, L.L.C.		13/662
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
4)	B37-86	1-342382-000	Carl R. & Sandra Clark	Chesapeak Appalachia, L.L.C.	12.50%	17/630
	Talk in		Chesapeake Appalachia, L.L.C.	SWN Production Company L.L.C.		30/480

Office of Oil and Gas

APR 15 2015

WV Department of Environmental Protection

Exhibit "A"

Attached hereto and made part of the State of West Virginia Oil and Gas Permit Form WW-6A1 by, SWN Production Company L.L.C. Operator

Greathouse North 205H

Brooke County/WV

7)	B37-23	1-342849-001	Matthew H Fair	Chesapeake Appalachia, L.L.C.	18%	17/278
			Chesapeake Appalachia, L.L.C	SWN Production Company, L.L.C.		
		1-342849-002	Susan S. Fair	Chesapeake Appalachia, L.L.C.	18%	17/266
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		·
		1-342849-003	Diane Courtwright	Chesapeake Appalachia, L.L.C	18%	17/272
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		·
		1-342849-004	Debra R. & Robert Cyphert	Chesapeake Appalachia, L.L.C	18%	17/284
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		
			_			
8)	B37-22	1-264338-000	Schiappa & Company Inc.	Chesapeake Appalachia, L.L.C.	12.50%	10/469
			Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480
9)	B37-13	47-000635-000	Harley J. & Rebecca K. Lemaster	Chesapeake Appalachia, L.L.C	18%	14/395
	Ū		Chesapeake Appalachia, L.L.C.	SWN Production Company, L.L.C.		30/480

Office of Oil and Gas

APR 1 5 2015

Environmental Protection



Jane Lew, WV 26378 PHONE: (832) 796-1610

March 26, 2015

Ms. Laura Adkins WV DEP Office of Oil & Gas 601 57th St., SE Charleston, WV 25304

RE: SWN's proposed Linda Greathouse BRK 205H in Brooke County, West Virginia, Drilling under Hukill Run Road and Lazear Run Road.

Dear Ms. Adkins:

SWN Production Company, LLC ("SWN") is applying for a drilling permit for the above referenced well. The State of West Virginia has raised some concern as to SWN's right to drill under Hukill Run Road and Lazear Run Road. Please be advised that SWN has leased all mineral owners under said route as it relates to the above-referenced well and unit.

Thank you.

Sincerely,

Derek A. Thomas Senior Landman


SWN Production Company, LLC

PO Box 1300

Jane Lew, WV 26378

APR 1 2015

WV Departing layesting the cash flow from Environmental Protection

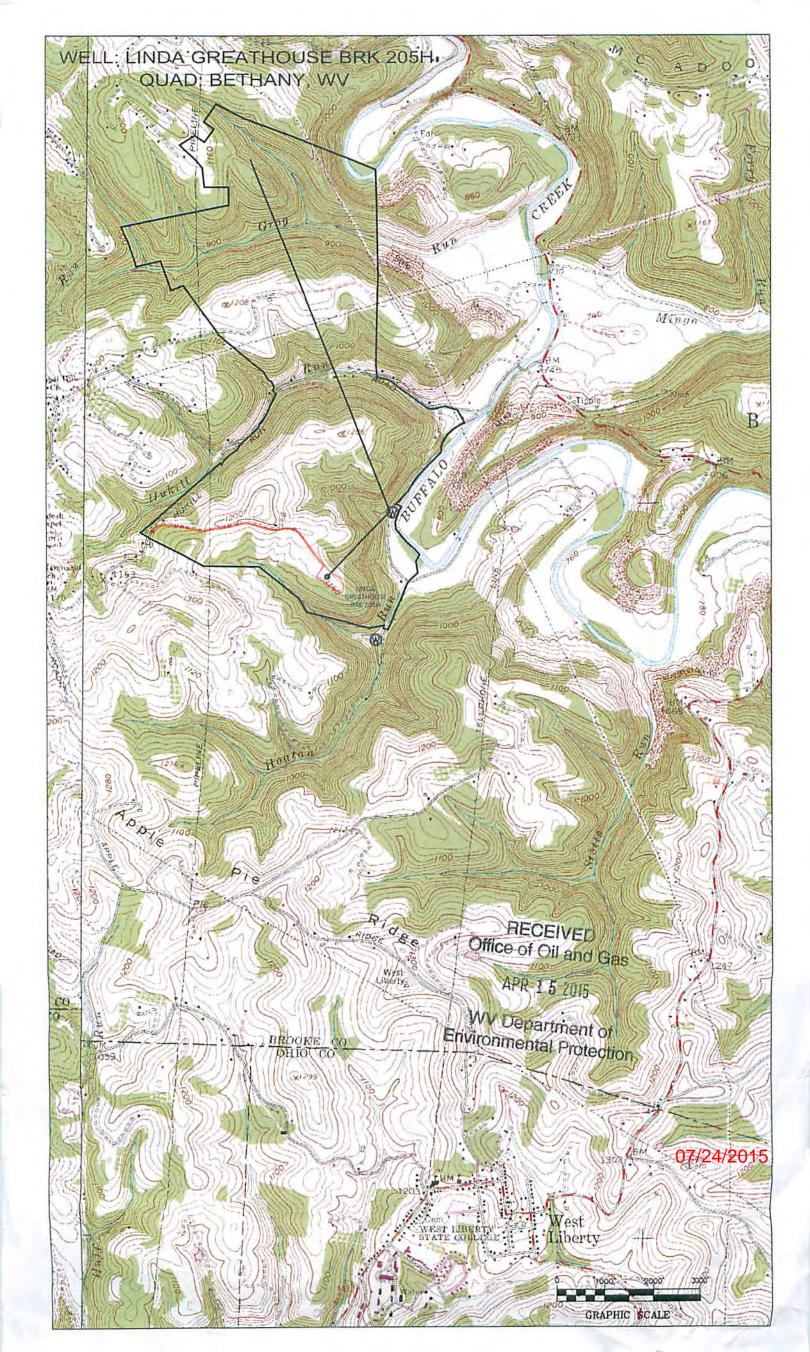

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS NOTICE CERTIFICATION

		NOTICE CERTIFICATI	ON		27.52
Date of Notic	ce Certification: 4/15/15		API No. 47	- 69 -	
Date of Fron	to an immunity of the				a Greathouse BRK 205H
					reathouse BRK Pad
Notice has	been given:		O faire man		
Pursuant to th	ne provisions in West Virginia Code tract of land as follows:	§ 22-6A, the Operator has prov	vided the req	uired parties v	vith the Notice Forms liste
State:	wv	UTM NAD 83	Easting:	533450.9	
County:	009-Brooke	UTM NAD 83	Northing:	4450487.0	
District:	1-Buffalo	Public Road Acc	ess:	Hukill Run Road	
Quadrangle:	247-Bethany	Generally used fa	ırm name:	Linda Greathous	e
Watershed:	Upper Ohio South				
	e § 22-6A-11(b), the applicant shall that been completed by the applicant		ne secretary	mat the notice	requirements or section to
that the Ope	West Virginia Code § 22-6A, the Operator has properly served the require ECK ALL THAT APPLY		his Notice Co	ertification	OOG OFFICE USE
☐ 1. NO	TICE OF SEISMIC ACTIVITY or	NOTICE NOT REQUIR			RECEIVED/ NOT REQUIRED
☐ 2. NO	TICE OF ENTRY FOR PLAT SURV	VEY or NO PLAT SURV	EY WAS CO	ONDUCTED	RECEIVED
■ 3. NO	TICE OF INTENT TO DRILL or	☐ NOTICE NOT REQUIRED NOTICE OF ENTRY FOR IT WAS CONDUCTED OF			RECEIVED/ NOT REQUIRED
i .					

Required Attachments:

■ 5. PUBLIC NOTICE

6. NOTICE OF APPLICATION

■ 4. NOTICE OF PLANNED OPERATION

The Operator shall attach to this Notice Certification Form all Notice Forms and Certifications of Water had bare been provided to the required parties and/or any associated written waivers. For the Public Notice, the operator shall attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication. The attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication. The attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication. The attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication. The attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication Union attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication. The attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication. The attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication at Carterior and Carterior attach and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publication and the copy of the Class II Legal Advertisement with publi

(PLEASE ATTACH)

☐ WRITTEN WAIVER BY SURFACE OWNER

RECEIVED

Office DI Bildand Gas

APR 1 5 2015

Certification of Notice is hereby given:

Well Operator: SWN Production Co., LLC

By: Dee Southal

Its: Regulatory Supervisor

Telephone: 304-884-1610

Address: P.O. Box 1300

Jane Lew, WV 26378

Facsimile: 304-471-2497

Email: Dee_Southall@swn.com

OFFICIAL SEAL
OF

bscribed and sworn before me this

Notary Public

My Commission Expire

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.

RECEIVED
Office of Oil and Gas

APR 1 5 2015

WW-6A (9-13) API NO. 47- 69 OPERATOR WELL NO. Linda Greathouse BRX 2054
Well Pad Name: Linda Greathouse BRK Pad

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS NOTICE OF APPLICATION

Not	ice Time Requirement:	notice shall be provi	ded no later th	an the filing date of	permit appl	lication.	
	e of Notice: 4/5/5 I ice of:	Date Permit Applica	tion Filed: 🄱	15/15			
V	PERMIT FOR ANY WELL WORK			PROVAL FOR THE AN IMPOUNDMEN			
Deli	ivery method pursuant	to West Virginia Co	ode § 22-6A-1	0(b)			
	PERSONAL SERVICE	REGISTERED MAIL		HOD OF DELIVERY EIPT OR SIGNATUR		Section 1	
sedii the soil a descoper more well importante provente provente control of the c	stered mail or by any method ment control plan require surface of the tract on which das leasehold being do ribed in the erosion and stator or lessee, in the event e coal seams; (4) The own work, if the surface tract boundment or pit as described a water well, spring or world water for consumption based well work activity is section (b) of this section reds of the sheriff required rision of this article to the e R. § 35-8-5.7.a required required or surface own	d by section seven of the the well is or is proposed by the proposed in the tract of land on where of record of the subset is to be used for the proposed in section nine of the subset in the tract of land on where of record of the proposed in section nine of the section of the subset in the land to be maintained pursuant to be maintained pursuant to the section of the land to be maintained pursuant the section of the land to be maintained pursuant the section of the land to be maintained pursuant the section of the land to be maintained pursuant the section of the land the	his article, and posed to be looked well work, ubmitted pursurhich the well purface tract or talacement, considering article; (5) ated within one stic animals; and f more than throads, the application and to section en holder is no ator shall also passed within also pater shall	the well plat to each of eated; (2) The owners of the surface tract is to the surface overlying the oil of truction, enlargement, Any surface owner or thousand five hundred (6) The operator of a thousand in common the surface that in common the surface that is the surface one, chart notice to a landowned provide the Well Site States.	of the following of record of the best of the used for section sever is located [si and gas lease alteration, rewater purveyed feet of the any natural groof or other co-caments requiripter eleven-arr, unless the Safety Plan (**)	ng persons: (1) The the surface tract or roads or other land n of this article; (3) c] is known to be the chold being develop pair, removal or ab yor who is known t center of the well as storage field wit owners of interests ed upon the person tof this code. (2) N lien holder is the I "WSSP") to the sur	e owners of record of tracts overlying the disturbance as The coal owner, underlain by one or ped by the proposed bandonment of any to the applicant to pad which is used to thin which the described in the Notwithstanding any andowner. W. Va.
S	Application Notice VURFACE OWNER(s)	VSSP Notice	S Plan Notice	COAL OWNER	OR LESSE		
	ne: Linda Greathouse		- 11	Name: Windsor Coal (-
0.00	ress: 750 Mountainview Drive		-	Address: 1000 Const Canonsburg, PA 26059	of Energy Drive		3
7.5	ne: Vicki Hamilton	1		COAL OPERAT	COP		-
	ress: 750 Mountainview Drive			The state of the s			
	iny, WV 26032		-	Name:			_
_		and and/or Other Di	· · · · · · · · · · · · · · · · · · ·	Address:			-
	URFACE OWNER(s) (F			☑ SURFACE OW?	VED OF W	TED WELL	-
Add	ne:		-	AND/OR WATER			
Add	ress:		-	Name: "See Attach			
Nan	***		-3			RECE	
				Address:	- (Office of O	VED
Add	ress:		-	Address:OPERATOR OF	ANVNAT	LIBAL GAS QIA	Badestei D
7 01	JRFACE OWNER(s) (I	mnoundments or Dir	<u> </u>				
				Name:		APR 152	nic
Add	ie:			Address.	15	- 0 2	415
Aud	ress:			*Please attach addi	itionaEforms	Yn Repartme Onmental Pr	ent of otection

API NO. 47-69

OPERATOR WELL NO. Linda Greathouse BRK 205H

Well Pad Name: Linda Greathouse BRK Pad

Notice is hereby given:

Pursuant to West Virginia Code § 22-6A-10(b), notice is hereby given that the undersigned well operator has applied for a permit for well work or for a certificate of approval for the construction of an impoundment or pit.

This Notice Shall Include:

Pursuant to W. Va. Code § 22-6A-10(b), this notice shall include: (1) copies of the application; (2) the erosion and sediment control plan required by section seven of this article; and (3) the well plat.

Pursuant to W. Va. Code § 22-6A-10(f), this notice shall include: (1) a statement of the time limits for filing written comments; (2) who may file written comments; (3) the name and address of the secretary for the purpose of filing the comments and obtaining additional information; and (4) a statement that the persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water.

Pursuant to W. Va. Code R. § 35-8-5.7.a, the operator shall provide the Well Site Safety Plan to the surface owner and any water purveyor or surface owner subject to notice and water testing as provided in section 15 of this rule.

Pursuant to W. Va. Code R. § 35-8-15.2.c, this notice shall: (1) contain a statement of the surface owner's and water purveyor's right to request sampling and analysis; (2) advise the surface owner and water purveyor of the rebuttable presumption for contamination or deprivation of a fresh water source or supply; advise the surface owner and water purveyor that refusal to allow the operator to conduct a pre-drilling water well test constitutes a method to rebut the presumption of liability; (3) advise the surface owner and water purveyor of his or her independent right to sample and analyze any water supply at his or her own expense; advise the surface owner and water purveyor whether or not the operator will utilize an independent laboratory to analyze any sample; and (4) advise the surface owner and or water purveyor that he or she can obtain from the Chief a list of water testing laboratories in the subject area capable of and qualified to test water supplies in accordance with standard acceptable methods.

Additional information related to horizontal drilling may be obtained from the Secretary, at the WV Department of Environmental Protection headquarters, located at 601 57th Street, SE, Charleston, WV 25304 (304-926-0450) or by visiting www.dep.wv.gov/oiland-gas/pages/default.aspx.

Well Location Restrictions

Pursuant to W. Va. Code § 22-6A-12, Wells may not be drilled within two hundred fifty feet measured horizontally from any existing water well or developed spring used for human or domestic animal consumption. The center of well pads may not be located within six hundred twenty-five feet of an occupied dwelling structure, or a building two thousand five hundred square feet or larger used to house or shelter dairy cattle or poultry husbandry. This limitation is applicable to those wells, developed springs, dwellings or agricultural buildings that existed on the date a notice to the surface owner of planned entry for surveying or staking as provided in section ten of this article or a notice of intent to drill a horizontal well as provided in subsection (b), section sixteen of this article was provided, whichever occurs first, and to any dwelling under construction prior to that date. This limitation may be waived by written consent of the surface owner transmitted to the department and recorded in the real property records maintained by the clerk of the county commission for the county in which such property is located. Furthermore, the well operator may be granted a variance by the secretary from these distance restrictions upon submission of a plan which identifies the sufficient measures, facilities or practices to be employed during well site construction, drilling and operations. The variance, if granted, shall include terms and conditions the department requires to ensure the safety and protection of affected persons and property. The terms and conditions may include insurance, bonding and indemnification, as well as technical requirements. (b) No well pad may be prepared or well drilled within one hundred feet measured horizontally from any perennial stream, natural or artificial lake, pond or reservoir, or a wetland, or within three hundred feet of a naturally reproducing trout stream. No well pad may be located within one thousand feet of a surface or ground water intake of a public water supply. The distance from the public water supply as identified by the department shall be measured as follows: (1) For a surface water intake on a lake or reservoir, the distance shall be measured from the boundary of the lake or reservoir. (2) For a surface water intake on a flowing stream, the distance shall be measured from a semicircular radius extending upstream of the surface water intake. (3) For a groundwater source, the distance shall be measured from the wellhead or spring. The department may, in its discretion, waive these distance restrictions upon submission of a plan identifying sufficient measures, facilities or practices to be employed during well site construction, drilling and operations to protect the waters of the state. A waiver of granted, shall impose any permit conditions as the secretary considers necessary. (c) Notwithstanding the foregoing provisions of this section prevents an operator from conducting the activities permitted or authorized by a Clean which previously also permit or other approval from the United States Army Corns of Engineers within any waters of the state or within the restricted and referenced other approval from the United States Army Corps of Engineers within any waters of the state or within the restricted areas referenced in this section. (d) The well location restrictions set forth in this section shall not apply to any well of Phultiple well pad if at least one of the wells was permitted prior to the effective date of this article. (e) The secretary shall, by December 31, 2012, report to the Legislature on the noise, light, dust and volatile organic compounds generated by the drilling/of horizontal wells as they relate to the well location restrictions regarding occupied dwelling structures pursuant to this section. Upon a finding fitment of secretary that the well location restrictions regarding occupied dwelling structures are inadequate or otherwise and the process the items 07/24/2015

API NO. 47-69

OPERATOR WELL NO. LINGU GREATOLAGO BRICK 205H

Well Pad Name: Linda Greathouse BRK Pad

examined in the study required by this subsection, the secretary shall have the authority to propose for promulgation legislative rules establishing guidelines and procedures regarding reasonable levels of noise, light, dust and volatile organic compounds relating to drilling horizontal wells, including reasonable means of mitigating such factors, if necessary.

Water Well Testing:

Pursuant to West Virginia Code § 22-6A-10(d), notification shall be made, with respect to surface landowners identified in subsection (b) or water purveyors identified in subdivision (5), subsection (b) of this section, of the opportunity for testing their water well. The operator shall provide an analysis to such surface landowner or water purveyor at their request.

Water Testing Laboratories:

Pursuant to West Virginia Code § 22-6A-10(i), persons entitled to notice pursuant to subsection (b) of this section may contact the department to ascertain the names and locations of water testing laboratories in the subject area capable and qualified to test water supplies in accordance with standard accepted methods. In compiling that list of names the department shall consult with the state Bureau for Public Health and local health departments. A surface owner and water purveyor has an independent right to sample and analyze any water supply at his or her own expense. The laboratory utilized by the operator shall be approved by the agency as being certified and capable of performing sample analyses in accordance with this section.

Rebuttable Presumption for Contamination or Deprivation of a Fresh Water Source or Supply:

W. Va. Code § 22-6A-18 requires that (b) unless rebutted by one of the defenses established in subsection (c) of this section, in any action for contamination or deprivation of a fresh water source or supply within one thousand five hundred feet of the center of the well pad for horizontal well, there is a rebuttable presumption that the drilling and the oil or gas well or either was the proximate cause of the contamination or deprivation of the fresh water source or supply. (c) In order to rebut the presumption of liability established in subsection (b) of this section, the operator must prove by a preponderance of the evidence one of the following defenses: (1) The pollution existed prior to the drilling or alteration activity as determined by a predrilling or prealteration water well test. (2) The landowner or water purveyor refused to allow the operator access to the property to conduct a predrilling or prealteration water well test. (3) The water supply is not within one thousand five hundred feet of the well. (4) The pollution occurred more than six months after completion of drilling or alteration activities. (5) The pollution occurred as the result of some cause other than the drilling or alteration activity. (d) Any operator electing to preserve its defenses under subdivision (1), subsection (c) of this section shall retain the services of an independent certified laboratory to conduct the predrilling or prealteration water well test. A copy of the results of the test shall be submitted to the department and the surface owner or water purveyor in a manner prescribed by the secretary. (e) Any operator shall replace the water supply of an owner of interest in real property who obtains all or part of that owner's supply of water for domestic, agricultural, industrial or other legitimate use from an underground or surface source with a comparable water supply where the secretary determines that the water supply has been affected by contamination, diminution or interruption proximately caused by the oil or gas operation, unless waived in writing by that owner. (f) The secretary may order the operator conducting the oil or gas operation to: (1) Provide an emergency drinking water supply within twenty-four hours; (2) Provide temporary water supply within seventy-two hours; (3) Within thirty days begin activities to establish a permanent water supply or submit a proposal to the secretary outlining the measures and timetables to be used in establishing a permanent supply. The total time in providing a permanent water supply may not exceed two years. If the operator demonstrates that providing a permanent replacement water supply cannot be completed within two years, the secretary may extend the time frame on case-by-case basis; and (4) Pay all reasonable costs incurred by the real property owner in securing a water supply. (g) A person as described in subsection (b) of this section aggrieved under the provisions of subsections (b), (e) or (f) of this section may seek relief in court... (i) Notwithstanding the denial of the operator of responsibility for the damage to the real property owner's water supply or the status of any appeal or determined on of liability for the damage to the real property owner's water supply, the operator may not discontinue providing the required was ervice until authorized to do so by the secretary or a court of competent jurisdiction.

Written Comment:

Pursuant to West Virginia Code § 22-6A-11(a), all persons described in subsection (b), section ten of this article may file written comments with the secretary as to the location or construction of the applicant's proposed well work within thirty days after the application is filed with the secretary. All persons described in West Virginia Code § 22-6A-10(1) via persons describ Environmental Protection location or construction of the applicant's proposed well work to the Secretary at:

Chief, Office of Oil and Gas Department of Environmental Protection 601 57th St. SE Charleston, WV 25304 (304) 926-0450

Such persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water. NOTE: YOU ARE NOT REQUIRED TO FILE ANY COMMENT.

OPERATOR WELL NO. Linda Greathouse BRK 205H Well Pad Name: Linda Greathouse BRK Pad

Time Limits and Methods for Filing Comments.

The law requires these materials to be served on or before the date the operator files its Application. You have THIRTY (30) DAYS after the filing date to file your comments. Comments must be filed in person or received in the mail by the Chief's office by the time stated above. You may call the Chief's office to be sure of the date. Check with your postmaster to ensure adequate delivery time or to arrange special expedited handling. If you have been contacted by the well operator and you have signed a "voluntary statement of no objection" to the planned work described in these materials, then the permit may be issued at any time.

Pursuant to West Virginia Code § 22-6A-11(c)(2), Any objections of the affected coal operators and coal seam owners and lessees shall be addressed through the processes and procedures that exist under sections fifteen, seventeen and forty, article six of this chapter, as applicable and as incorporated into this article by section five of this article. The written comments filed by the parties entitled to notice under subdivisions (1), (2), (4), (5) and (6), subsection (b), section ten of this article shall be considered by the secretary in the permit issuance process, but the parties are not entitled to participate in the processes and proceedings that exist under sections fifteen, seventeen or forty, article six of this chapter, as applicable and as incorporated into this article by section five of this article.

Comment Requirements

Your comments must be in writing and include your name, address and telephone number, the well operator's name and well number and the approximate location of the proposed well site including district and county from the application. You may add other documents, such as sketches, maps or photographs to support your comments.

Disclaimer: All comments received will be placed on our web site http://www.dep.wv.gov/oil-and-gas/Horizontal-Permits/Pages/default.aspx and the applicant will automatically be forwarded an email notice that such comments have been submitted. The applicant will be expected to provide a response to comments submitted by any surface owner, water purveyor or natural gas storage operator noticed within the application.

Permit Denial or Condition

The Chief has the power to deny or condition a well work permit. Pursuant to West Virginia Code § 22-6A-8(d), the permit may not be issued or be conditioned, including conditions with respect to the location of the well and access roads prior to issuance if the director determines that:

- (1) The proposed well work will constitute a hazard to the safety of persons;
- (2) The plan for soil erosion and sediment control is not adequate or effective;
- (3) Damage would occur to publicly owned lands or resources; or
- (4) The proposed well work fails to protect fresh water sources or supplies.

A permit may also be denied under West Virginia Code § 22-6A-7(k), the secretary shall deny the issuance of a permit if the secretary determines that the applicant has committed a substantial violation of a previously issued permit for a horizontal well, including the applicable erosion and sediment control plan associated with the previously issued permit, or a substantial violation of one or more of the rules promulgated under this article, and in each instance has failed to abate or seek review of the violation within the time prescribed by the secretary pursuant to the provisions of subdivisions (1) and (2), subsection (a), section five of this article and the rules promulgated hereunder, which time may not be unreasonable.

Pursuant to West Virginia Code § 22-6A-10(g), any person entitled to submit written comments to the secretary pursuant to subsection (a), section eleven of this article, shall also be entitled to receive from the secretary a copy of the permit as issued or a copy of the order modifying or denying the permit if the person requests receipt of them as a part of the written comments submitted concerning the permit application. Such persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water.

RECEIVED
Office of Oil and Gas

APR 1 5 2015

API NO. 47-69 -

OPERATOR WELL NO. Linda Greathouse BRK 205rt

Well Pad Name: Linda Greathouse BRK Pad

Notice is hereby given by:

Well Operator: SWN Production Co., LLC
Telephone: 304-884-1610
Email: Dee_Southall@swn.com


Address: P.O. Box 1300

Jane Lew, WV 26378

Facsimile: 304-471-2497

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.

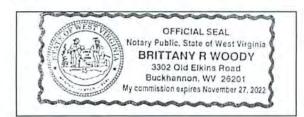

Subscribed and sworn before me this and day of Much 2015

Notary Public

My Commission Expires

RECEIVED
Office of Oil and Gas

APR 1 5 2015

913766 LINDA GREATHOUSE BRK PAD_1500 FT._ WATER PURVEYORS



										1	
Date	Pad No.	Pad Name	Parcel No.	Property Owner(s)	Owner Address	City	State	Zip	Owner Phone	Wate	er Source O
9/12/2014	913766	LINDA GREATHOUSE BRK PAD			RD L, BOX 220H	WELLSBURG		26070	0		400
9/12/2014	913766	LINDA GREATHOUSE BRK PAD	3-0B42-060.01	WADE AUSTIN WAYNE & JUSTINE ADAH x2	RR 2 BOX 81	WELLSBURG	WV	26070	(304)829-4613	10	Y == 2
									RECEIVE Office of Oil an	APR 1 5 2015	WV Departmei vironmental Pro

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS NOTICE OF INTENT TO DRILL

Fursuant to W. Va. Code § 22-6A-16(b), the Notice of Intent to Drill is only required if the notice requirements of W. Va. Code § 22-

Notice Time Date of Notice		provided at least TEN (10) days prior to filing a Date Permit Application Filed:	permit application.
Delivery me	thod pursuant to West Virgini	a Code § 22-6A-16(b)	
☐ HAND	■ CERTIFIED M	IAII.	
DELIVE		CEIPT REQUESTED	
receipt reque: drilling a hor of this subsec subsection mand if availab	sted or hand delivery, give the s izontal well: <i>Provided</i> , That no tion as of the date the notice wa ay be waived in writing by the s	east ten days prior to filing a permit application, urface owner notice of its intent to enter upon the price given pursuant to subsection (a), section to as provided to the surface owner: <i>Provided</i> , how urface owner. The notice, if required, shall include mail address of the operator and the operator	he surface owner's land for the purpose of en of this article satisfies the requirements vever, That the notice requirements of this lude the name, address, telephone number,
Name: Linda Gr		Name: Vicki Hamilton	
	Mountainview Drive	Address: 750 Mountainview	Drive
Bethany, WV 260	032	Bethany, WV 26032	
State: County: District:	Brooke Buffalo	UTM NAD 83 Easting: Northing: Public Road Access:	533450.9 4450487.0 Hukill Run Road
District:	Buffalo	Public Road Access:	Hukill Run Road
Quadrangle:	Bethany	Generally used farm name:	Linda Greathouse
Watershed:	Upper Ohio South		
Pursuant to V facsimile nun related to hor	nber and electronic mail addre- izontal drilling may be obtaine	6(b), this notice shall include the name, address of the operator and the operator's authorized from the Secretary, at the WV Department of 25304 (304-926-0450) or by visiting www.de	ed representative. Additional information f Environmental Protection headquarters,
Notice is he	reby given by:		
	SWN Production Company, LLC	Authorized Representative:	Steve Perkins BECEUM
Address:	179 Innovation Drive	Address:	Steve Perkins RECEIVED
Jane Lew, WV 26	3378	Jane Lew, WV 26378	179 Information Drive Of Oil and Gas
Telephone:	304-517-6603	Telephone:	304-317-0003
Email:	steve_perkins@swn.com	Email:	steve_perkins@swincom 5 2015
Facsimile:	304-461-2497	Facsimile:	304-461-2497 WV Doport
Oil and Gas	Privacy Notice:	sonal information, such as name, address and te	

duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.

WW-6A5 (1/12)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS NOTICE OF PLANNED OPERATION

Notice Time Date of Notice	Requirement: notice shall be pro	vided no	later than the filing	date of permit	application.
Delivery met	hod pursuant to West Virginia			1. 1	
CERTII	FIED MAIL		HAND		
RETUR	RN RECEIPT REQUESTED		DELIVERY		
return receipt the planned or required to be drilling of a langes to the	requested or hand delivery, give to operation. The notice required by provided by subsection (b), section norizontal well; and (3) A propose the surface affected by oil and gas of	the surfa y this su on ten of sed surfa operation	ce owner whose lan- absection shall inclu- this article to a surface use and compen- as to the extent the d	d will be used for de: (1) A copy face owner whos sation agreement amages are com	cation, an operator shall, by certified mail or the drilling of a horizontal well notice of of this code section; (2) The information se land will be used in conjunction with the at containing an offer of compensation for pensable under article six-b of this chapter. sted in the records of the sheriff at the time
(at the address	eby provided to the SURFACE of s listed in the records of the sherif				
Name: Linda Gre		_ /		Vicki Hamilton	
Address: 750 M		_/		S: 750 Mountainview	Drive
Jane Lew, WV 260	032		Jane Lev	v, WV 26032	
operation on State: County: District:	the surface owner's land for the pwest Virginia Brooke Buffalo		f drilling a horizonta UTM NAD 8 Public Road	Easting: Northing: Access:	well operator has developed a planned ct of land as follows: 533450.9 4450487.0 Hukill Run Road
Quadrangle:	Bethany		Generally us	ed farm name:	Linda Greathouse
Watershed:	Upper Ohio South				
to be provide horizontal wel surface affects information re	Vest Virginia Code § 22-6A-16(c), d by W. Va. Code § 22-6A-10(h ll; and (3) A proposed surface used by oil and gas operations to the lated to horizontal drilling may located at 601 57th Street, SE,	to a se and corne extent be obtain	urface owner whose inpensation agreeme the damages are connected from the Secre-	e land will be un nt containing an ompensable und tary, at the WV	code section; (2) The information required used in conjunction with the drilling of a offer of compensation for damages to the er article six-b of this chapter. Additional Department of Environmental Protection or by visiting

The Office of Oil and Gas processes your personal information, such as name, address and telephone number as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal formation personal DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.



WEST VIRGINIA DEPARTMENT OF TRANSPORTATION

Division of Highways

1900 Kanawha Boulevard East • Building Five • Room 110 Charleston, West Virginia 25305-0430 • (304) 558-3505

Earl Ray Tomblin Governor

Paul A. Mattox, Jr., P. E. Secretary of Transportation/ Commissioner of Highways

April 8, 2015

James A. Martin, Chief Office of Oil and Gas Department of Environmental Protection 601 57th Street, SE Charleston, WV 25304

Subject: DOH Permit for the Linda Greathouse Pad, Brooke County Linda Greathouse BRK 205H

Dear Mr. Martin,

The West Virginia Division of Highways has transferred Permit #06-2011-0232 for the subject site to Southwestern Energy for access to the State Road for the well site located off of Brooke County Route 30 SLS.

The operator has signed an OIL AND GAS ROAD MAINTENANCE BONDING AGREEMENT and provided the required Bond. This operator is currently in compliance with the DOH OIL AND GAS POLICY dated January 3, 2012.

Very Truly Yours,

Gary K. Gayon Qilland Gas Regional Maintenance Engineer Central Office Oil & Gas Goldfinator

WV Department of Environmental Protection

Cc: Brittany Woody Southwestern Energy

CH, OM, D-6

File

Supplier Name	Product Name	Product Use	Chemical Name	CAS Number
			Ethanol	000064-17-5
NALCO	EC6110A	Biocide	Glutaraldehyde (Pentanediol)	000111-30-8
ONESOURCE			Quaternary Ammonium Compounds	N/A-063
	EC6629A	Biocide	No Hazardous Components	NONE
	WBK-133 OXIDIZER	Breaker	Ammonium Persulfate	007727-54-0
			Ammonium Persulfate	007727-54-0
	WBK-134	Breaker	Crystalline Silica (Quartz Sand, Silicon Dioxide)	014808-60-7
	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Ol- Ol-LW	Proprietary Non Hazardous Salt	N/A-229
	WCS-631LC	Clay Stabilizer	Water	007732-18-5
	WFR-55LA	Friction Reducer	No Hazardous Components	NONE
1	WGA-15L	Gel	Petroleum Distillate Hydrotreated Light	064742-47-8
WEATHERFORD			Potassium Carbonate	000584-08-7
	WPB-584-L	Buffer	Potassium Hydroxide	001310-58-3
	WXL-101LE	Corsslinker	No Hazardous Components	NONE
	WXL-101LM	Crosslinker	Petroleum Distillate Hydrotreated Light	064742-47-8
	The same of the same of	Crosslinker	Water	007732-18-5
			Ethylene Glycol	000107-21-1
	WXL-105L		Boric Acid	010043-35-3
			Ethanolamine	000141-43-5
	B244 Green-Cide 25G	Biocide	Glutaraldehyde	111-30-8
	L071 Temporary Clay Stabilizer	Clay Stabilizer	Cholinium Chloride	67-48-1
	Breaker J218		Diammonium Peroxidisulphate	7727-54-0
SCHLUMBERGER	EB-Clean* J475 Breaker	- Breaker	Diammonium Peroxidisulphate	7727-54-0
	Friction Reducer B315	Friction Reducer	Distillates (petroleum), Hydrotreated light Aliphatic Alcohol Glycol Ether	64742-47-8 Proprietary
	Friction Reducer J609	Noudooi	Ammonium Sulfate	7783-20-2

RECEIVED
Office of Oil and Gas

APR 1 5 2015

Supplier Name	Product Name	Product Use	Chemical Name	CAS Number	
Supplier Hame	Water Gelling Agent J580	Gel	Carbohydrate Polymer	Proprietary	
	Scale Inhibitor B317	Scale Inhibitor	Trisodium ortho phosphate Ethane-1, 2-diol	7601-54-9 107-21-1	
SCHLUMBERGER	Borate Crosslinker J532		Aliphatic polyol Sodium tetraborate decahydrate	Proprietary 1303 96-4	
	Crosslinker J610	Crosslinker	Aliphatic polyol Potassium hydroxide	Proprietary 1310 58-3	

Supplier Name	Product Name	Product Use	Chemical Name	CAS Number
			Didecyl Dimethyl Ammonium Chloride	007173-51-1
			Ethanol	000064-17-5
	ALPHA 1427	biocide	Glutaraldehyde (Pentanediol)	000111-30-8
			Quaternary Ammonium Compound	068424-85-1
			Water	007732-18-5
	BF-7L	Buffer	Potassium Carbonate	000584-08-7
	The same		Choline Chloride	000067-48-1
	ClayCare	Clay Stabilizer	Water	007732-18-5
BAKER HUGHES	Enzyme G-I	Breaker	No Hazardous Components	NONE
	ENZYME G-NE	Breaker	No Hazardous Components	NONE
)	FRW-18	Friction Reducer	Petroleum Distillate Hydrotreated Light	064742-47-8
		Gel	Petroleum Distillate Blend	N/A-014
	GW-3LDF		Polysaccharide Blend	N/A-021
			Diethylene Glycol	000111-46-6
	SCALETROL 720	Scale Inhibitor	Ethylene Glycol	000107-21-1
			Boric Acid	010043-35-3
	XLW-32	Crosslinker	Methanol (Methyl Alcohol)	000067-56-1
	APB01 (AMMONIUM PERSUFATE BREAKER)	Breaker	Ammonium Persulfate	007727-54-0
	B05 (LOW PH BUFFER)	Buffer	Acetic acid	000064-19-7
	BXL03 Borate XL Delayed High Temp	Crosslinker	No Hazardous Components	NONE
FRAC TECH SERVICES	FRW-200	Friction Reducer	No Hazardous Components	NONE
JENVIOLO	HVG01 (TURQUOISE-1 BULK)	Gelling Agent	Petroleum Distillate Hydrotreated Light	064742-47-8
	KCLS-4	Clay Stabilizer	No Hazardous Components	NONE
	LTB-1	Breaker	Ammonium Persulfate	N/A

RECEIVED
Office of Oil and Gas

APR 1 5 2015

WEST VIRGINIA 811

TWO WORKING DAYS PRIOR TO EXCAVATION, THE CONTRACTOR MUST CONTACT THE WV ONE CALL SYSTEM, INC., 1-800-245-4848

OWNER



SWN PRODUCTION CO., LLC. P.O. BOX 1300 JANE LEW, WV 26378 (832)-796-1610

LINDA GREATHOUSE BRK PAD "A" AS-BUILT & RECLAMATION PLAN BUFFALO DISTRICT, BROOKE COUNTY, WV MARCH 2015

SHEET INDEX

2-3. EVACUATION ROUTE/ PREVAILING WINDS 4. AS-BUILT OVERVIEW 5-12. AS-BUILT 13-14. ACCESS ROAD PROFILE

15. RECLAMATION OVERVIEW 16-23. RECLAMATION PLAN 24-25. DETAILS

WVDEP OOG

ACCEPTED AS-BUILT

7/21/2015

TOTAL DISTURBED AREA: 29.7 ACRES PAD DISTURBED AREA: 9.4 ACRES ROAD DISTURBED AREA: 20.3 ACRES

ACCESS ROAD LENGTH; 4,037' ACCESS ROAD AVG. WIDTH: 26' WELL PAD ELEVATION; 1137'

3H - API# 009-00097


PLANS PREPARED BY:

BOORD BENCHEK & ASSOCIATES, INC.

ENGINEERING, SURVEYING, CONSTRUCTION AND MINING SERVICES

SOUTHPOINTE, PA 15317 PHONE: 724-746-1055



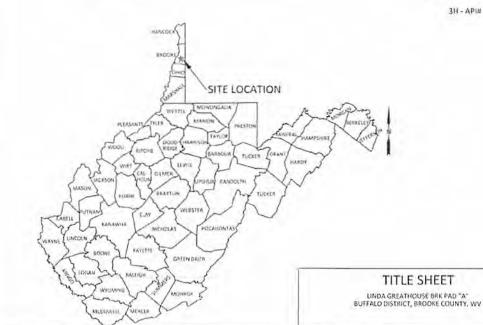

COORDINATES

SITE ENTRANCE
(NAD 83)

LAT: 40° 12' 22.08"

LONG: 80° 37' 11.87"
(NAD 27)

LAT: 40° 12' 12.82"

LONG: 80° 37' 12.60°

CENTER OF WELLS
(NAD 83)

LAT: 40° 12' 14.82"

LONG: 80° 36' 25.07"
(NAD 27)

LAT: 40° 12' 14.57"

LONG: 80° 36' 25.81"

SHEET

OF


25

API#900097

API# 900155

API# 900156

API# 900157

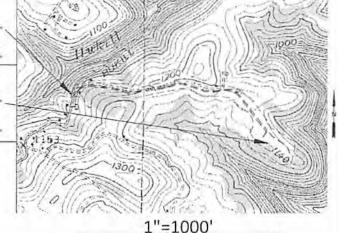

3000

