

## west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

January 16, 2014

## WELL WORK PERMIT

## Horizontal 6A Well

This permit, API Well Number: 47-4105686, issued to CNX GAS COMPANY LLC , is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: CAM17BHS

Farm Name: KIRBY, LINDA

API Well Number: 47-4105686

Permit Type: Horizontal 6A Well

Date Issued: 01/16/2014

# **PERMIT CONDITIONS**

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. <u>Failure to adhere to the specified permit</u> conditions may result in enforcement action.

## **CONDITIONS**

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

			41	63	276
1) Well Operator: CNX Gas Compar	ny LLC	494458046	Lewis	Freemans Creek	Camden
		Operator ID	County	District	Quadrangle
2) Operator's Well Number: CAM17BHS			Well Pad Nan	ne: CAM17HS	
3 Elevation, current ground: 1250	EI	evation, proposed	post-construc	etion: 12	244'
4) Well Type: (a) Gas	Oil _	Undergroun	d Storage		
Other					
(b) If Gas: Shallow		Deep			
Horizontal					
5) Existing Pad? Yes or No: NO					
6) Proposed Target Formation(s), Depth(s Formation - Marcellus, Depth - 7090' (BOTTOM), Thickness			d Associated	Pressure(s):	
7) Proposed Total Vertical Depth: 71	90'				
8) Formation at Total Vertical Depth:	Huntersville Ch	ert			
9) Proposed Total Measured Depth:	14,100'				
10) Approximate Fresh Water Strata Dept	ths: 2	90', 347', 417			
11) Method to Determine Fresh Water De	epth:	Offset Wells			
12) Approximate Saltwater Depths:	None Anticipated	i			
13) Approximate Coal Seam Depths:	135'				
14) Approximate Depth to Possible Void	(coal mine,	karst, other):	None Antic	pated	
15) Does proposed well location contain of adjacent to an active mine? If so, indicates the second s			or No		
16) Describe proposed well work:	& stimulate new horizontal Ma	rcellus well. Well to be drilled to a TMD of 14100	Well to be drilled to a TVD of 71	90', formation @ TVD - Huntersville Ch	hert. Well will be plugged back to an
approximate depth of 6500' (approximate due to exact Kick of point being unknown). Plugging back	will be done using the displace	sement method and Class A type cement. A soil	d cement plug will be set from TD	to KOP. If an unexpected void is enco	ountered, plan will be to set casing
at a minimum of 30' past void and cement to surface with approved Class A type cement. Well to	bore will not be drilled any de	eeper than 100' into the Onoridaga Group, no	will there be any production, pe	rforation, or stimulation of any forma	ations below the target formation
17) Describe fracturing/stimulating method The stimulation will be multiple stages divided over the lateral			RECE	IVED sign. Slickwater fractu	ring technique will be
utilized on each stage using sand, water, and chemicals.			SEP#29	e of Oil and	Gas
			14045	SEP 2 0 2013	
18) Total area to be disturbed, including r		oile area, pits, etc,	(Wikis)Depai	tmess	at of
19) Area to be disturbed for well pad only	, less acces	s road (acres):	vironments		
			Enviro	onmental Pr	Page 1 of 3

## 20)

# CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	N	L.S.	81.3#	100	100	Grout to surface
Fresh Water	13 3/8"	N	J-55	54.5#	550	550	CTS w/ approved Class A Type Cement
Coal							
Intermediate	9 5/8"	N	J-55	36#	2700	2700	CTS w/ approved Class A Type Cement
Production	5 1/2"	N	P-110	20#	14100	14100	2400 cu. ft. w/ 50/50 POZ Lead & Class A Teil
Tubing	2 3/8"	N	J-55	4.7#	7600	7600	
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	26"	0.438	2110	Class A Type	1.18
Fresh Water	13 3/8"	17 1/2"	0.380	2730	Class A Type	1.39
Coal						
Intermediate	9 5/8"	12 1/4"	0.352	3520	Class A Type	1.18
Production	5 1/2"	8 3/4" and 8 1/2"	0.361	12640	Class A Type	1.26
Tubing	2 3/8"	5 1/2" CSG	0.190	7700		
Liners						

## **PACKERS**

Kind:	None	
Sizes:	None	CEIVED COS
Depths Set:	None	RECEIVED Gas

SEP 2 0 2013

WV Department of 9-18-13

Environmental Protection Page 2 of 3

21) Describe centralizer placement for each casing string.	Conductor - No centralizers used. Fresh Water &
Coal - Bow spring centralizers on first joint then every fourth joint	to 100 feet from surface. Intermediate - Bow spring
centralizers one on the first two joints and every forth joint until in	side surface casing. Production - Rigid bow spring
centralizer on first joint then every 2 casing joints (free floating) to	rough the lateral and the curve.
(Note: cementing the 5 1/2" casing completely in open hole later	al and curve.)
22) Describe all cement additives associated with each cement	type. Conductor - 2% CaCl2.
Fresh Water/Coal - 2% CaCl2. Intermediate - 2% CaCl2. Product	ion - 2.6% Cement extender, 0.7% Fluid loss additive,
0.5% High Temperature Retarder, 0.2% Friction Reducer	
23) Proposed horehole conditioning procedures conductor	The help is drilled w/ air and casing rep in air. Apart from incuring
[ [ [ [ [ [ [ [ [ [ [ [ [ [ [ [ [ [ [	- The hole is drilled w/ air and casing ran in air. Apart from insuring
23) Proposed borehole conditioning procedures.  Conductor the hole is clean via air circulation at TD, there are no other conditioning procedures.  Once casing is on bottom, the casing shoe will be cleared with fresh water and gel prior to conditioning procedures.	Fresh Water/Coal - The hole is drilled w/ air and casing is ran in air.
the hole is clean via air circulation at TD, there are no other conditioning procedures.	Fresh Water/Coal - The hole is drilled w/ air and casing is ran in air.
the hole is clean via air circulation at TD, there are no other conditioning procedures.  Once casing is on bottom, the casing shoe will be cleared with fresh water and gel prior to conditioning procedures.	Fresh Water/Coal - The hole is drilled w/ air and casing is ran in air.  ementing. Intermediate - The hole is drilled w/ air and casing is ran in air.  prior to cementing. (Note: Drilling soap may be utilized if hole gets

\*Note: Attach additional sheets as needed.

RECEIVED
Office of Oil and Gas

SEP 3 0 2013

WV Department of Environmental Protection of 3

## **Cement Additives**

- Conductor 2% CaCl2
- Freshwater/Coal 2% CaCl2
- Intermediate 2% CaCl2
- Production
  - o 2.6% Cement extender
  - o 0.7% Fluid Loss Additive
  - o 0.5% High Temperature Retarder
  - o 0.2% Friction Reducer

Office of Oil and Gas

SEP 30 2013

WV Department of Environmental Protection

	04		~ 0	0 0	O
	Page	of	3		
API Number 47 - 041					
Operator's Well	No. CAM17BH	IS		4	

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

## FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name_CNX Gas Co	ompany LLC	OP (	Code _494458046
Watershed (HUC 10)_Left	Fork of Freemans Creek	Quadrangle Camd	en
Elevation 1248'	County_Lewis	Di	strict Freemans Creek
Will a pit be used for drill c	re than 5,000 bbls of water to complet outtings? Yes NoX be anticipated pit waste: N/A		ork? Yes X No
and the state of t	ner be used in the pit? Yes1	No X If so wh	at ml 2 N/A
	Method For Treated Pit Wastes:	11 30, 111	
I	Land Application  Underground Injection ( UIC Permit No. 1)  Reuse (at API Number	9 for disposal location)	
Will closed loop system be	used? Yes		
Drilling medium anticipated	d for this well? Air, freshwater, oil ba	sed, etc. Air and oil based	mud
-If oil based, what	type? Synthetic, petroleum, etc. Synth	netic	
Additives to be used in drill	ing medium? Bactericide, Polymers and \	Weighting Agents	
Drill cuttings disposal meth	od? Leave in pit, landfill, removed of	ffsite, etc. Landfill	
	lan to solidify what medium will be us name/permit number? Meadowfill, North		
on August 1, 2005, by the C provisions of the permit are law or regulation can lead to I certify under per application form and all a obtaining the information,	Office of Oil and Gas of the West Virg e enforceable by law. Violations of a o enforcement action. nalty of law that I have personally e ttachments thereto and that, based of	inia Department of Env any term or condition of examined and am fami on my inquiry of those e, accurate, and comple	AL WATER POLLUTION PERMIT issued rironmental Protection. I understand that the f the general permit and/or other applicable liar with the information submitted on this se individuals immediately responsible for lete. I am aware that there are significant ent.
Company Official Signature	:(_	X adable	CX
Company Official (Typed I			<u> </u>
Company Official Title_De	esignated Agent General Manager WV G	as Operations	RECEIVED Office of Oil and Gas
Subscribed and sworn before Kelly O.  My commission expires	Eddy	eptember [	Notary Public OFFICIAL SEAL ITEMPORAL OF STATE OF WEST VROUND PAINTMENT OF KELLY A EDDY MENT OF THE PROTECTION O1/17/201  JANE LEW, WY 26378 Y COMMISSION EXPIRES SEPT. 18, 2018

Form WW-9

CNX Gas Company LLC

	CAMITRHS	
Operator's Well No.	CAM17BHS	

Proposed Revegetation Treatment: Acr	es Disturbed 24.4	Prevegetation p	н 6.5
Lime Tons/			
Fertilizer (10-20-20 or equival-		os/acre (500 lbs minimum)	
Mulch Hay or Straw	2 <sub>Tons</sub>		
		ed Mixtures	
Area I			rea II
Seed Type lbs/	acre	Seed Type	lbs/acre
	25	Orchard Grass	25
Birdsfoot Trefoil 1	5	Birdsfoot Trefoil	15
Ladino Clover 1	0	Ladino Clover	10
Comments:		Y	
Title: Inspector		Date: 9-18-13	
Title: Inspector Field Reviewed? ( )	Yes (	) No	RECEIVED

WV Department of Environmental Protection

01/17/2014

# west virginia department of environmental protection 5 6 8 6



# Water Management Plan: Primary Water Sources



WMP-01667

API/ID Number:

047-041-05686

Operator:

Consol Energy - WV

CAM17BHS

## Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- •Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED DEC 0 6 2013 -

API Number:

047-041-05686

Operator:

Consol Energy - WV

CAM17BHS

Stream/	River
---------	-------

**Tygart Valley River** Source

Barbour

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

12/30/2014

12/30/2015

5,019,525

39.190421

-80.017423

Regulated Stream?

Ref. Gauge ID:

3054500

TYGART VALLEY RIVER AT PHILIPPI, WV

Max. Pump rate (gpm):

1,470

Min. Gauge Reading (cfs):

355.01

Min. Passby (cfs)

344.41

**DEP Comments:** 

West Fork River @ Consol Energy Site 1 Source

Lewis

Owner:

**CONSOL ENERGY** 

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

39.068402

Intake Latitude: Intake Longitude: -80.456132

12/30/2014

12/30/2015

5,019,525

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

1,680

Min. Gauge Reading (cfs):

184.36

Min. Passby (cfs)

112.68

**DEP Comments:** 

 Source West Fork River @ Consol Energy Site 2 Lewis

Owner:

**CONSOL ENERGY** 

Start Date

End Date

Total Volume (gal) 5,019,525

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.064668

-80.457541

12/30/2014

12/30/2015

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

1,680

Min. Gauge Reading (cfs):

184.36

Min. Passby (cfs)

112.68

**DEP Comments:** 

Source Summary

WMP-01667

API Number:

047-041-05686

Operator:

Consol Energy - WV

CAM17BHS

**Ground Water** 

Source

**PHL1 Groundwater Well** 

Barbour

Owner:

**Consol Energy** 

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

12/30/2014

12/30/2015

5,019,525

39.191287

-80.019039

Regulated Stream?

Ref. Gauge ID:

9999994

TYGART VALLEY RIVER AT PHILIPPI, WV

Max. Pump rate (gpm):

900

Min. Gauge Reading (cfs):

113.00

Min. Passby (cfs)

113.00

**DEP Comments:** 

Refer to USGS Stream Gauging Station 03054500

## Source Detail



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	1,901.06	115.12	1,786.94
2	2,155.51	115.12	2,041.39
3	2,600.93	115.12	2,486.81
4	2,132.23	115.12	2,018.12
5	1,375.48	115.12	1,261.37
6	586.10	115.12	471.99
7	402.01	115.12	287.89
8	280.57	115.12	166.46
9	177.42	115.12	63.30
10	286.75	115.12	172.64
11	950.89	115.12	836.78
12	1,738.34	115.12	1,624.22

# Water Availability Profile 3000 2000 1000 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Water Availability Assessment	of Location
Base Threshold (cfs):	113.12
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.01
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	113.01
Passby at Location (cfs):	113.12

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01667 API/ID Number: 047-041-05686 Operator: Consol Energy - WV CAM17BHS Tygart Valley River Source Latitude: 39.190421 30833 Source ID: Source Name Source Longitude: -80.017423 Consol Energy 5020001 HUC-8 Code: 12/30/2014 Anticipated withdrawal start date: Drainage Area (sq. mi.): 931.43 Barbour County: 12/30/2015 Anticipated withdrawal end date: **Endangered Species?** Mussel Stream? 5,019,525 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,470 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Taylor County PSD Max. Truck pump rate (gpm) Gauged Stream? 3054500 TYGART VALLEY RIVER AT PHILIPPI, WV Reference Gaug 914.00 341 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	1,901.06	361.51	1,542.64
2	2,155.51	361.51	1,797.09
3	2,600.93	361.51	2,242.51
4	2,132.23	361.51	1,773.82
5	1,375.48	361.51	1,017.07
6	586.10	361.51	227.69
7	402.01	361.51	43.59
8	280.57	361.51	-77.84
9	177.42	361.51	-181.00
10	286.75	361.51	-71.66
11	950.89	361.51	592.48
12	1,738.34	361.51	1,379.92


# **Water Availability Profile** 3000 2000 1000 1 2 5 9 10 11 12 Median Monthly Flow — Threshold

Min. Gauge Reading (cfs):  Passby at Location (cfs):	355.01 347.50
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	3.28
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	10.73
Base Threshold (cfs):	347.50

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	570.21	140	
2	641.99	-	
3	826.92	-	
4	472.92		
5	485.43	-	10.2
6	243.24		
7	157.59		
8	150.48	-	-
9	104.70	4.7	
10	102.65	4	
11	257.59	(4)	14.0
12	439.79	-	

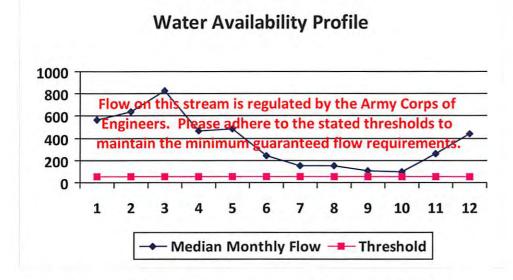

Upstream Demand (cfs):	34.37
Downstream Demand (cfs):	34.37
Pump rate (cfs):	3.74
Headwater Safety (cfs):	14.34
Ungauged Stream Safety (cfs):	0.00


Passby at Location (cfs):

Water Availability Assessment of Location

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	569.65	-	
2	641.37	*	
3	826.12	-	
4	472.47		
5	484.96	-	
6	243.00	÷.	
7	157.44	-	
8	150.33	-	
9	104.60		1
10	102.55	40	2
11	257.35	4	
12	439.37	*	-

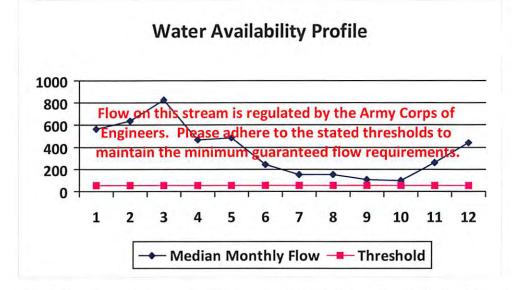

Base Threshold (cfs):	-
Upstream Demand (cfs):	34.37
Downstream Demand (cfs):	34.37
Pump rate (cfs):	3.74
Headwater Safety (cfs):	14.33
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

# west virginia department of environmental protection



# Water Management Plan: Secondary Water Sources



WMP-01667

API/ID Number

047-041-05686

Operator:

Consol Energy - WV

CAM17BHS

## Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

# Lake/Reservior

Source ID: 30838 Source Name

Little Hackers Creek Impoundment (WV83489)

Source start date:

12/30/2014

Source end date:

12/30/2015

Source Lat:

39.1889

Source Long:

-80.0653

County

Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal):

5,019,525

DEP Comments:

Little Hackers Creek Impoundment (WV83489) used by Wolf Run Mining Company -

Sentinel Mine

API/ID Number

047-041-05686

Operator:

Consol Energy - WV

#### CAM17BHS

## Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

# Multi-site impoundment

Source ID: 30839 Source Name

Warder North Impoundment

Source start date: Source end date: 12/30/2014 12/30/2015

Source Lat:

39.192505

Source Long: -80.025198 County

Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal):

5,019,525

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-189

Source ID: 30840 Source Name

Warder South Impoundment

Source start date: Source end date: 12/30/2014 12/30/2015

Source Lat:

39.19097

Source Long:

-80.025198

County

Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal):

5,019,525

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-190

API/ID Number

047-041-05686

Operator:

Consol Energy - WV

#### CAM17BHS

## Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 30841 Source Name Alton 1 Freshwater Impoundment Source start date: 12/30/2014 12/30/2015 Source end date: 38.794961 -80.184542 Upshur Source Lat: Source Long: County 5,019,525 Total Volume from Source (gal): Max. Daily Purchase (gal) DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-194

Alton 2 Freshwater Impoundment Source ID: 30842 Source Name 12/30/2014 Source start date: 12/30/2015 Source end date: 38.806146 -80.195108 Upshur Source Lat: Source Long: County 5,019,525 Total Volume from Source (gal): Max. Daily Purchase (gal) **DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-195

API/ID Number

047-041-05686

Operator:

Consol Energy - WV

#### CAM17BHS

## Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

## **Recycled Frac Water**

Source ID: 30837 Source Name

Source Lat:

**Fairmont Brine Processing** 

Source start date: Source end date: 12/30/2014 12/30/2015

**Commercial Supplier** 

39.5088

Source Long: -80.126418

County

Marion

Max. Daily Purchase (gal)

Total Volume from Source (gal):

5,019,525

**DEP Comments:** 

Source ID: 30843 Source Name

**ALT 1 Flowback Pit** 

Source start date:

12/30/2014

Source end date:

12/30/2015

Source Lat:

38.793967

Source Long:

80.183196

County

Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal):

5,019,525

**DEP Comments:** 

041 05686

WMP-01667

API/ID Number

047-041-05686

Operator:

Consol Energy - WV

#### CAM17BHS

## Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 30844 Source Name PHL 1 Flowback Pit 12/30/2014 Source start date: 12/30/2015 Source end date: -80.018833 Barbour Source Lat: 39.192372 Source Long: County 5,019,525 Max. Daily Purchase (gal) Total Volume from Source (gal): DEP Comments:

PHL 13 Flowback Pit Source ID: 30845 Source Name 12/30/2014 Source start date: 12/30/2015 Source end date: -80.018059 Barbour 39.219211 Source Long: Source Lat: County 5,019,525 Max. Daily Purchase (gal) Total Volume from Source (gal): DEP Comments:

041 05686

WMP-01667

API/ID Number

047-041-05686

Operator:

Consol Energy - WV

### CAM17BHS

## Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

				Source end date:	12/30/201
	Source Lat		Source Long:	County	
	Max. Daily	/ Purchase (gal)		Total Volume from Source (gal):	5,019,525
D	EP Comments:	Sources include,	, but are not limited	to, PHL4 well Pad	

