

LATITUDE 39° 10' 00"



LONGITUDE 80° 32' 30"

T5 OGIS topo location

7.5' loc 1.035 15' loc _____
 1.10W (calc.) _____

Company _____

Farm _____

Quad BIG ISAAC 7 1/2'

County LEWIS

District FREEMAN CREEK

WELL LOCATION MAP

File No. 041- 20A

Burnside

ENGINEER'S REPORT


I, the undersigned hereby certify that the map and report shows all the information to the best of my knowledge and belief as required by the oil and gas section of the state laws of West Virginia.

Frank Godwin
Engineer

Acknowledged before me a Notary Public this 11th day of January, 1931.

My commission expires the 30th day of March, 1937

John F. Wiegman
Notary Public

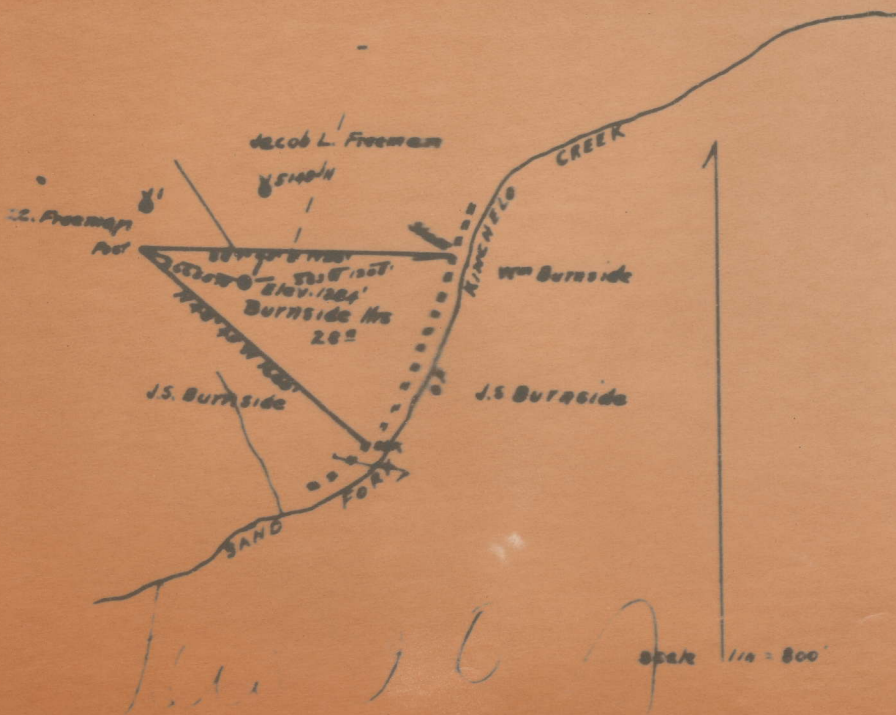

AFFIDAVIT IN TRIPLICATE TO TIME AND MAIN PLUGGING AND FILLING WELL

(REQUIRED BY SECTION 8, CHAPTER 86, ACTS 1933)

WEST VIRGINIA DEPARTMENT OF MINES, OIL AND GAS SECTION

Name Coal Mine

COAL OPERATOR

NAME OF

Bethlehem, Pa.

ADDRESS

COAL

COAL OPERATOR

WELL

ADDRESS

NO.

COAL OPERATOR

Well No.

ADDRESS

SECTION

AFFIDAVIT TO BE MADE IN TRIPLICATE. ONE COPY TO BE MAILED BY REGISTER AND MAIL TO THE DEPARTMENT OF MINES, OIL AND GAS SECTION, CHARLESTON, WEST VIRGINIA. THE SECOND COPY TO BE KEPT BY THE COAL OPERATOR AND THE THIRD COPY (AND EXTRA COPIES IF REQUIRED) TO BE MAILED TO THE COAL OPERATOR BY REGISTER AND MAIL.

AFFIDAVIT

STATE OF WEST VIRGINIA

COUNTY OF Harrison

NO.

J. A. Roberts

and

being first duly sworn according to law depose and say that they are experienced

and filling oil and gas wells and were employed by South West Virginia Coal and Oil Company and participated in the work of plugging and filling the above well that said well

was plugged and filled on the 18th day of February, 1931 and that the well was plugged and filled in the following manner:

Manner in which sand was plugged: Drilled hole at 2727 ft. and clay to 2437 ft. Run 6 5/8 x 3' Wood Dry Hole Plug and cement to 2421 ft. Bridged hole at 2329 ft. Filled with clay to 2100 ft. Run second 6 5/8 x 3' Wood Dry Hole Plug. Filled with clay to 2085 ft. Put 6 3/8" casing at 1900 and pulled out. Cut 8 1/2 x 3' Wood Dry Hole Plug; to 1900 ft. Filled with stone. Filled with stone to 668. Run Packer with 10 ft. of perforator at 658 ft. Filled with cement to 594', then filled with sand.

Manner in which coal was plugged:

Handwritten initials and date: JMR 2/18

Description of monument:

THE ABOVE DESCRIPTIONS MUST BE IN DETAIL AND IN ACCORDANCE WITH THE PROVISIONS OF SECTION 8, CHAPTER 86, ACTS 1933, AND THAT THE WORK OF PLUGGING AND FILLING SAID WELL WAS COMPLETED ON THE 18th day of February, 1931.

18 31

And further deponents saith not.

20A

Freemans Creek District, Lewis County, W. Va.
 South Penn Oil Co., P. O. Drawer 1255, Pittsburgh, Pa.
 On 28 acres, surface owned by S. M. Burnside, RFD No. 1,
 Kincheloe, W. Va., and mineral rights by Harley Burnside,
 Roanoke, Virginia.

Elevation, 1284' L.

16' conductor; 10" casing, 305'; 8 $\frac{1}{2}$ " 1470'; 6-5/8" 2065'.

Coal was encountered at 43-48 and 624-628'.

Abandonment reported to Dept. of Mines Feb. 4, 1931.

Well was shot in Gordon and Speechley Sands.

Salt water at 1440'.

	Top.	Bottom.
Conductor	0	16
Native coal	45	48
Bluff Sand	175	305
Pittsburgh Coal	624	628
Little Dunkard Sand	1065	1120
Big Dunkard Sand	1170	1235
Gas Sand	1320	1350
1st Salt Sand (water, 1440')	1410	1465
2nd Salt Sand	1500	1550
3rd Salt Sand	1630	1775
Red rock	1850	1920
Maxton Sand	1920	1935
Little Lime	2009	2031
Pencil Cave	2031	2047
Big Lime	2047	2107
Big Injun Sand	2107	2225
Squaw Sand	2232	2290
Gantz? (Berea) Sand (gas, 2410-2434')	2405	
50-Ft. Sand	2515	
30-Ft. Sand	2598	2624
Gordon Stray Sand (oil, 2698')	2685	
Gordon Sand (oil, 2765')	2762	
Fifth Sand	2936	2940
Speechley Sand (oil, 3646-3648')	3645	3656
Total depth		3675

Drilling completed 10-15-18