

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS**

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: JL Erwin Operator Well No.: No. 5
 Location: Elevation: 1325' Quadrangle: Glover Gap 7.5'
 District: Mannington County: Marion
 Latitude: _____ Feet South of: _____ Deg. _____ Min. _____ Sec. _____
 Longitude: _____ Feet West of: _____ Deg. _____ Min. _____ Sec. _____

Well Type: Oil X Gas _____ WIW _____

Company: East Resources Inc. Coal Operator NA
5260 Dupont Road or Owner _____
Parkersburg, WV 26101 _____

Agent: Philip S. Ondrusek Coal Operator NA
 or Owner _____

Permit Issued: 9/27/12

AFFIDAVIT

State of West Virginia, County of Wood ss:

Phil Ondrusek and Kenneth Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 8th day of October, 20 12 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Cement	3000'	2900' (Tag)		
Cement	2150'	2050'	8 1/4" 410'	884'
Cement	1800'	1700'	6 5/8" 1390'	942'
Cement	1480'	1380'	4 1/2" 2490'	449'
Cement	850'	457'		
Cement	450'	350'		
Cement	100'	0		
Perforated 6 5/8" casing, 1 shot/20' from 2150' - 2050' & 1800' - 1700'. Ripped				
8 1/4" casing 850' - 650' & continuous rip through coal from 712' - 708' & 807' - 802'.				
6% Gel Between Cement Plugs				

RECEIVED
OFFICE OF OIL & GAS
2012 NOV 13 P 1:27


Description of monument: 7" x 5' and that the work of plugging and filling said well was completed on the 23rd day of October, 20 12

And further deponents saith not.

Philip S. Ondrusek
Kenneth Dotson

Sworn and subscribed before me this 6 day of November, 20 12
 My commission expires: Nov. 12, 2018

Notary Public Tina L. Pethel
 Affidavit reviewed by the Office of Oil and Gas: [Signature]
 Title: Manager

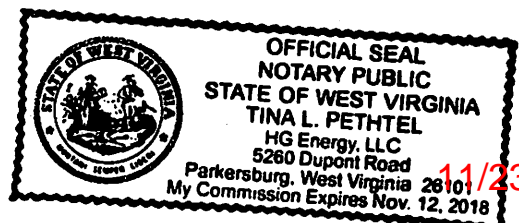

11/23/2012