

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address
CONSOLIDATION COAL COMPANY
Lease or Property Owner
1 BRIDGE ST. MONONGAH WV 26582
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26582
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5399
Well No.
CONSOLIDATION COAL COMPANY
Farm

STATE INSPECTOR SUPERVISING PLUGGING

[Signature] 4-20-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MIKE MITCHELL and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 2nd day of February, 2012 and that the well was plugged in the following manner:

Formation	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In
	Cleaned 12 1/4" hole from the surface to 390'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 390' to 1276'. Reduced hole to 6 1/4". Cleaned 6 1/4" hole from 1276' to 1277'. Tagged plug at 1277'. Cleaned 9 7/8" hole through the Pittsburgh Coal (798' - 805'). Left 15' of 16" conductor pipe in the hole from 15' to surface. Cemented hole from 1277' back to surface as follows: From 1277' to 1005' with 125 sacks of 35/65 Poz Mix Cement. From 1005' to 698' with 160 sacks of Thixotropic Cement with green dye. From 698' to surface with 280 sacks of Econofill Cement. A total of 565 sacks of cement were used to fill the hole from 1277' to surface. Cement did circulate at the surface.	16" Conductor	0'	15'
Coal Seams		Description of Monument		
<u>PITTSBURGH</u> (Name)	798' to 805'	77" of 7" casing w/company name, well number, permit number and date cemented stated on 7"		
(Name)		casing. Well marker will be attached to the		
(Name)		cement plug at ground level.		


... And that the work of plugging and filling said well was completed on the 21st day of February, 2012

And further deponents saith not.

[Signature]
Mike Mitchell
[Signature]
Kevin S. Wright

Sworn to and subscribed before me this 18th day of April, 2012

My commission expires:
March 18, 2020

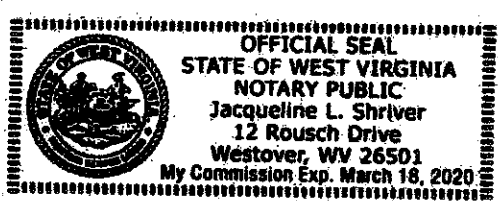

[Signature]
Notary Public
Permit No. 47-49-02200-P
Well No. 5399