

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.  
Coal Operator or Owner  
1 BRIDGE STREET MONONGAH, WV 26554  
Address  
CONSOLIDATION COAL CO.  
Coal Operator or Owner  
1 BRIDGE STREET MONONGAH, WV 26554  
Address  
DIANE SNODGRASS  
Lease or Property Owner  
433 SEVEN SPRINGS RD MANNINGTON, WV 26582  
Address

CONSOLIDATION COAL CO.  
Name of Well Operator  
1 BRIDGE STREET MONONGAH, WV 26554  
Complete Address  
GLOVER GAP 7.5'  
Well Location  
MANNINGTON  
District  
MARION  
County  
5320  
Well No.  
SNODGRASS, DIANE  
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William P. ...* 5-30-13

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of MONONGALIA ss:

DELBERT MOORE and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 7<sup>th</sup> day of February, 2013 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Cleaned 12 1/4" hole from the surface to 387'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 387' to 742'. Tagged top of 8 5/8" casing at 742'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 742' to 1220'. Left 478' of 8 5/8" casing in the hole from 742' to 1220'. 8 5/8" casing was parted at the following depths: 1006' to 1018', 818' to 820'. Continued to clean 7 7/8" hole from 1220' to 1441'. Tagged solid plug at 1441'. Cut 8 5/8" casing at the following depths: 920' and 1120'. Cleaned 9 7/8" hole through the Pittsburgh Coal seam from 730' - 736'. Left 20' of 16" conductor casing in the hole from the surface to 20'.		16" Conductor	0'	20'
<p><u>Cemented hole from 1441' back to surface as follows:</u> From 1441' to 936' with 107 sacks of SuperLite Cement. From 936' to 630' with 120 sacks of Super Tropic Cement with white dye. From 630' to surface with 317 sacks of SuperLite Cement. A total of 544 sacks of cement were used to fill the hole from 1441' back to surface. Cement did circulate at the surface.</p>				
<u>Coal Seams</u>		<u>Description of Monument</u>		
<u>Pittsburgh</u>	<u>(741' - 747')</u>	<u>77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.</u>		

**RECEIVED**  
Office of Oil & Gas  
MAY 30 2013  
WV Department of  
Environmental Protection

... and that the work of plugging and filling said well was completed on the 27<sup>th</sup> day of February, 2013

And further deponents saith not.


*Delbert Moore*  
Delbert Moore

*Kevin S. Wright*  
Kevin S. Wright

Sworn to and subscribed before me this 1<sup>st</sup> day of Apr. 1 2013

*Carole A. Mayle*  
Notary Public

My commission expires: 9-12-2017

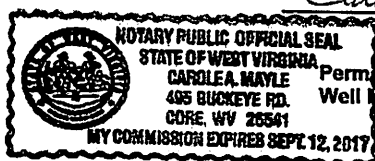

Permit No. 47-049-02194-P  
Well No. 5320

05/31/2013