

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

ALLEGHENY FORESTLAND, LLC.
Lease or Property Owner
3001 EMERSON AVE. PARKERSBURG, WV 26104
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE STREET MONONGAH, WV 26554
Complete Address

GLOVER GAP 7.5'
Well Location
MANNINGTON
District

MARION
County

5459
Well No.

ALLEGHENY FORESTLAND, LLC.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William H. ...* 7-13-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

DELBERT MOORE and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 12th day of April, 2012 and that the well was plugged in the following manner:

| Sand or Zone Record Formation | Filling Material | Casing/Tubing Size | Casing Pulled | Casing Left In |
|---|------------------------|--|---------------|----------------|
| Cleaned 12 1/2" hole from surface to 94'. Reduced hole to 9 7/8". | | 16" Conductor | 0' | 20' |
| Cleaned 9 7/8" hole from 94' to top of 8 5/8" casing at 1217'. | | | | |
| Reduced hole to 7 7/8". Cleaned 7 7/8" hole through 8 5/8" casing from 1217' to 1281'. Bottom of 8 5/8" casing at 1281'. Continued to clean 7 7/8" hole from 1281' to 1293'. Cleaned hole with 3 1/2" drill pipe stinger from 1293' to 1374'. Due to the poor condition of the 8 5/8" casing in the hole the original total depth at 1374' could not be reached. Left 64' of 8 5/8" casing in the hole from 1217' to 1281'. Set bottom hole plug from 1293' to 1228' with 30 sacks of Super Lite Cement. Tagged top of bottom hole plug at 1228'. | | 8 5/8" Casing | 0' | 64' |
| Cleaned 9 7/8" hole through the Pittsburgh Coal (1012' - 1017'). Left 20' of 16" conductor pipe in the hole from 20' to surface. | | | | |
| Gelled/Cemented hole from 1374' back to surface as follows: | | | | |
| From 1374' to 1293' with 9.8ppg Aquagel. From 1293' to 1228' with 30 sacks of Super Lite Cement. From 1228' to 912' with 150 sacks of SuperTropic Cement with white dye. From 912' to surface with 360 sacks of Super Lite Cement. A total of 3.36 bbl of Aquagel and 540 sacks of cement were used to fill the hole from 1374' back to surface. Cement did circulate at the surface. | | | | |
| Coal Seams | | Description of Monument | | |
| <u>Pittsburgh</u> | <u>(1012' - 1017')</u> | 77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level. | | |

RECEIVED
Office of Oil & Gas
JUL 18 2012
WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 25th day of April, 2012

And further deponents saith not.


Delbert Moore
Delbert Moore

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 25th day of June, 2012

My commission expires:

March 18, 2020

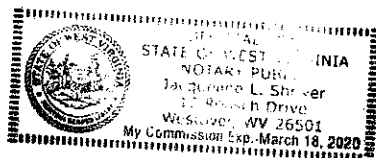

Jacqueline L. Shriver
Notary Public

Permit No. 47-049-02212-P
Well No. 5459

07/20/2012