

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.  
Coal Operator or Owner  
1 BRIDGE STREET MONONGAH, WV 26554  
Address

CONSOLIDATION COAL CO.  
Coal Operator or Owner  
1 BRIDGE STREET MONONGAH, WV 26554  
Address

JEFFERY MICHAEL  
Lease or Property Owner  
PO BOX 211 MANNINGTON, WV 26582  
Address

CONSOLIDATION COAL CO.  
Name of Well Operator  
1 BRIDGE STREET MONONGAH, WV 26554  
Complete Address

GLOVER GAP 7.5'  
Well Location  
MANNINGTON  
District

MARION  
County

5141  
Well No.

HAYS, J.L. & A.J., #2  
Farm

STATE INSPECTOR SUPERVISING PLUGGING 

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of MONONGALIA ss:

ROBERT STEEL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 12<sup>th</sup> day of August, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Cleaned 12 1/2" hole from the surface to 281'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 281' to 436'. Cleaned junk metal out of the hole from 436' to 643'. Cleaned 9 7/8" hole from 643' to 1203'. Cleaned 9 7/8" hole through the Pittsburgh Coal seam from 907' to 913'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 1203' to 1210'. Left 20' of 16" conductor casing in the hole from the surface to 20'.		16" Conductor	0'	20'
<p><b>RECEIVED</b> Office of Oil &amp; Gas OCT 30 2013 WV Department of Environmental Protection</p>				
<u>Cemented hole from 1210' back to surface as follows:</u>				
From 1210' to 1110' with 85 sacks of Class A Cement. Left gel spacer from 1110' to 983' with 10 pound per gallon Aquagel. From 983' to 867' with 85 sacks of Expandable Cement. Left gel spacer from 867' to 100' with 10 pound per gallon Aquagel. From 100' to surface with 60 sacks of Class A Cement. A total of 230 sacks of cement was used to fill the hole from 1210' to the surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
Pittsburgh	(907' - 913')	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.		

... and that the work of plugging and filling said well was completed on the 29<sup>th</sup> day of August, 2013


And further deponents saith not.

  
Robert Steel

  
Kevin S. Wright

Sworn to and subscribed before me this 9<sup>th</sup> day of Sept 2013

My commission expires: 9-12-2017

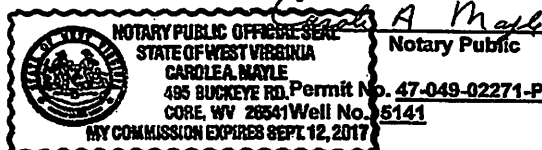

11/01/2013