

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.  
Coal Operator or Owner  
1 BRIDGE STREET MONONGAH, WV 26554  
Address

CNX GAS COMPANY LLC  
Name of Well Operator  
2481 JOHN NASH BLVD., BLUEFIELD WV 24701  
Complete Address

CONSOLIDATION COAL CO.  
Coal Operator or Owner  
1 BRIDGE STREET MONONGAH, WV 26554  
Address

GLEN EASTON WV 7.5'  
Well Location

WILEY R. GAREY  
Lease or Property Owner  
45 G & W DR, MOUNDSVILLE, WV 26041  
Address

CAMERON  
District

MARSHALL  
County

MC 43  
Well No.

GAREY, PAUL & GERALD  
Farm

STATE INSPECTOR SUPERVISING PLUGGING

*Jim Nicholson*

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of MONONGALIA ss:

MICHAEL W. CAMPBELL and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 21<sup>st</sup> day of June, 2017 and that the well was plugged in the following manner:

| Sand or Zone Record Formation  | Filling Material  | Casing/Tubing Size   | Casing Pulled | Casing Left In |
|--|---|--|---------------|----------------|
|  | Logged hole with caliper, directional, and gamma logs to a total depth of 1038'. Based on well record no bond log was needed due to 7" casing being cemented in from the surface with 150 sacks of cement. Set bottom hole plug from 938' to 1038' with 20 sacks of Class A Expandable Cement. Set 7" cement retainer at 780'. Stung into cement retainer at 780' with 3 1/2" drill pipe. Pumped 945 sacks of Class A expandable cement 180% of total volume through cement retainer into Pittsburgh Coal Seam 855.1' to 860.5'. Released out of cement retainer and cemented the hole from 780' to surface. Left an unknown amount of 7" casing in the hole from the surface to an unknown depth, with fiberglass 7" casing from 817' to 876'. | 7"   | 0'            | Unknown        |
| <b>Cemented hole from 780' back to Surface as follows:</b><br>A total of 1120 sacks of Class A Expandable Cement was used to cement hole. Cement did circulate at the surface. |   |  |               |                |
| <b>Coal Seams</b>  |   | <b>Description of Monument</b>   |               |                |
| <u>Pittsburgh</u>  | <u>(855.1' - 860.5')</u>  | 77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level. |               |                |
|  |   |  |               |                |
|  |   |  |               |                |

... and that the work of plugging and filling said well was completed on the 28<sup>th</sup> day of June, 2017


And further deponents saith not.

*Michael W. Campbell*  
Michael W. Campbell

*Kevin S. Wright*  
Kevin S. Wright

Sworn to and subscribed before me this 14<sup>th</sup> day of July, 2017

*Notary Public*  
Notary Public

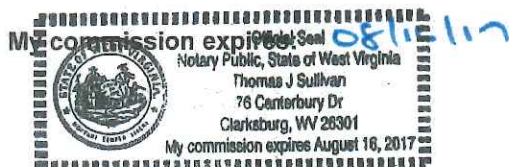

Permit No. 47-051-01096-P  
Well No. MC 43