



west virginia department of environmental protection

Office of Oil and Gas
601 57th Street SE
Charleston, WV 25304
(304) 926-0450
(304) 926-0452 fax

Earl Ray Tomblin, Governor
Randy C. Huffman, Cabinet Secretary
www.dep.wv.gov

PERMIT MODIFICATION APPROVAL

April 01, 2014

NOBLE ENERGY, INC.
333 TECHNOLOGY DRIVE, SUITE 110
CANONSBURG, PA 15317

Re: Permit Modification Approval for API Number 8510069 , Well #: PEN2DHS

Extended Lateral Leg

Oil and Gas Operator:

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

Please call James Martin at 304-926-0499, extension 1654 if you have any questions.

Sincerely,

Gene Smith
Regulatory/Compliance Manager
Office of Oil and Gas

085 10069
MOD



February 6, 2014

West Virginia Department of Environmental Protection
601 57th Street, SE
Charleston, WV 25304-2345

Re: PEN2 Wells API 47-085-10069 DHS/ 47-085-10070 EHS Modification 1

Dear Office of Oil and Gas:

Enclosed please find permit modifications to extend the lateral legs on the above referenced wells. I have enclosed a new casing program signed by the inspector, new survey plat and revised mineral exhibits. These wells are located in Ritchie County, WV.

Should you have any questions, or desire any additional information, please do not hesitate to contact me at 724-820-3061 or via email at dswiger@nobleenergyinc.com.

Sincerely,

A handwritten signature in blue ink, appearing to read 'Dee Swiger', written over the printed name.

Dee Swiger

Regulatory Analyst III

DS/

Enclosures:

Received

FEB 10 2014

Office of Oil and Gas
WV Dept. of Environmental Protection

04/04/2014

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS
WELL WORK PERMIT APPLICATION

085 GAS 10069 MOD

AP: 47-085-10069

1) Well Operator: Noble Energy, Inc. Operator ID 494501907 County 085 District Clay Pennsboro Quadrangle

2) Operator's Well Number: PEN2DHS Well Pad Name: PEN2

3 Elevation, current ground: 1074.85 Elevation, proposed post-construction: 1075.4

4) Well Type: (a) Gas Oil Underground Storage

Other
(b) If Gas: Shallow Deep
Horizontal

5) Existing Pad? Yes or No: No

6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s):
Target-Marcellus, Depth- 6262-66324; Thickness- 62"; Pressure- 4174 # psi

7) Proposed Total Vertical Depth: 6314'

8) Formation at Total Vertical Depth: Marcellus

9) Proposed Total Measured Depth: 16273'

10) Approximate Fresh Water Strata Depths: 454'

11) Method to Determine Fresh Water Depth: Closest well & Seneca Technology data base

12) Approximate Saltwater Depths: 1244'

13) Approximate Coal Seam Depths: no coal

14) Approximate Depth to Possible Void (coal mine, karst, other): none

15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: no

16) Describe proposed well work: Drill the vertical depth to the Marcellus at an estimated total vertical depth of approximately 6314 feet.
Drill Horizontal leg - stimulate and produce the Marcellus Formation.
Should we encounter a unanticipated void we will install a minimum of 20' of casing below the void but not more than 50' set a basket and grout to surface.

17) Describe fracturing/stimulating methods in detail:
The stimulation will be multiple stages divided over the lateral length of the well. Stage spacing is dependent upon engineering design. Slickwater fracturing technique will be utilized on each stage using sand, water, and chemicals.

18) Total area to be disturbed, including roads, etc. (acres): 8.43

19) Area to be disturbed for well pad only, less access road (acres): 8.0

Received

FEB 10 2014

Office of Oil and Gas
WV Dept. of Environmental Protection

Dul
1-21-14

04/04/2014

CASING AND TUBING PROGRAM

085 10069
MOD

20)

TYPE	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	N	LS	52	40'	40'	GTS
Fresh Water	13 3/8"	N	J-55	54.5	579'	579'	CTS
Coal							
Intermediate	9 5/8"	N	HCK-55 BTC	36.0	5410'	5410'	CTS
Production	5 1/2"	N	HCP-110 TYP BTC	20.0	16273'	16273'	Class A tail slurry to inside the intermediate casing
Tubing							
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	26"	.25	2730	Grout to Surface	GTS
Fresh Water	13 3/8"	17.5"	.380	2730	Type 1	1.18
Coal						
Intermediate	9 5/8"	12.25"	.352	3520	Class A	1.19
Production	5 1/2"	8.75/8.5"	.361	12,640	Class A	1.27
Tubing						
Liners						

PACKERS

Kind:				
Sizes:				
Depths Set:				

Received

FEB 10 2014

Office of Oil and Gas
WV Dept. of Environmental Protection

Deal
1-21-14

085 10069

MOD

noble energy		PENS-2 WELLBORE DIAGRAM Marcellus Shale Horizontal Ritchie County, WV Ground Elevation 1076'									
Ground Elevation		1076'		PENS-2D SHL (Lat/Long)				(308287.77N, 1572169.15E) (NAD27)			
Azm		139.06°		PENS-2D LP (Lat/Long)				(307960.79N, 1572669.7E) (NAD27)			
				PENS-2D BHL (Lat/Long)				(300551.83N, 1578891.2E) (NAD27)			
HOLE	CASING	GEOLOGY	TYD Top	TYD Bottom	MUD	CEMENT	CENTRALIZERS	CONDITIONING	COMMENTS		
26"	20" 52#				AIR	Grouted to surface	N/A	Ensure the hole is clean at TD.	Stabilize surface fill/soil. Conductor casing = 0.25" wall thickness		
		Conductor		40							
17.5"	13-3/8" 54.5# J-55 BTC				AIR	15.6 ppg Type 1 + 2% CaCl ₂ 0.25# Lost Circ 40% Excess Yield = 1.18	Bow Spring every 3 joints to surface	Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement.	Protect freshwater. Surface casing = 0.380" thick. Burst=2730 psi		
		Surface Casing		579		CTS					
12.25"	9-5/8" 36# HCK-55 BTC				SOBM 8.0 - 8.5 ppg	50 bbis 10 ppg spacer, 12.0 ppg lead slurry, (800') of 15.6 ppg Class A tail slurry cemented to surface.	Bow Spring centralizers on every joint to KOP, one every third joint from KOP to 100' from surface	Once at TD, circulate at least 2x bottoms up. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement	Casing to be ran below the Alexander. Intermediate casing = 0.352" wall thickness Burst=3520 psi, Collapse 2980 psi		
		Maxton	1929	1973							
		Big Lime	2005	2082							
		Big Injun	2082	2130							
		Weir	2449	2465							
		Fifth	2921	2927							
		Gordon	2950	2952							
		Warren	3532	3566							
		Speechley	3850	4404							
		Riley	4601	4615							
		Benson	4955	4961							
Alexander	5204	5210									
		Intermediate Casing	5410								
8.75/8.5"	5-1/2" 20# HCP-110 TXP BTC	Rhinestreet	5740	5908	SOBM 12.5- 13.0 ppg	120 bbis spacer with density and rheology heirarchy, lead slurry to 2000' to recover SOBM, 14.8 ppg Class A tail slurry to inside intermediate casing	Rigid Bow Spring every third joint from KOP to TOC	Once at TD, circulate at max allowable pump rate for at least 6x bottoms up. Once on bottom with casing, circulate a minimum of one hole volume prior to pumping cement.	Production casing = 0.361" wall thickness Burst=12640 psi Note:Actual centralizer schedules may be changed due to hole conditions		
		Marcellus	6262	6324							
		TD	16273								Rigid Bow Spring every joint to KOP

8.75/8.5" Hole - Cemented Long String 5-1/2" 20# HCP-110 TXP BTC

Received

FEB 10 2014


DW 1-21-14

Office of Oil and Gas
WV Dept. of Environmental Protection

Received

Sheet 2 of 3

Office of Oil and Gas

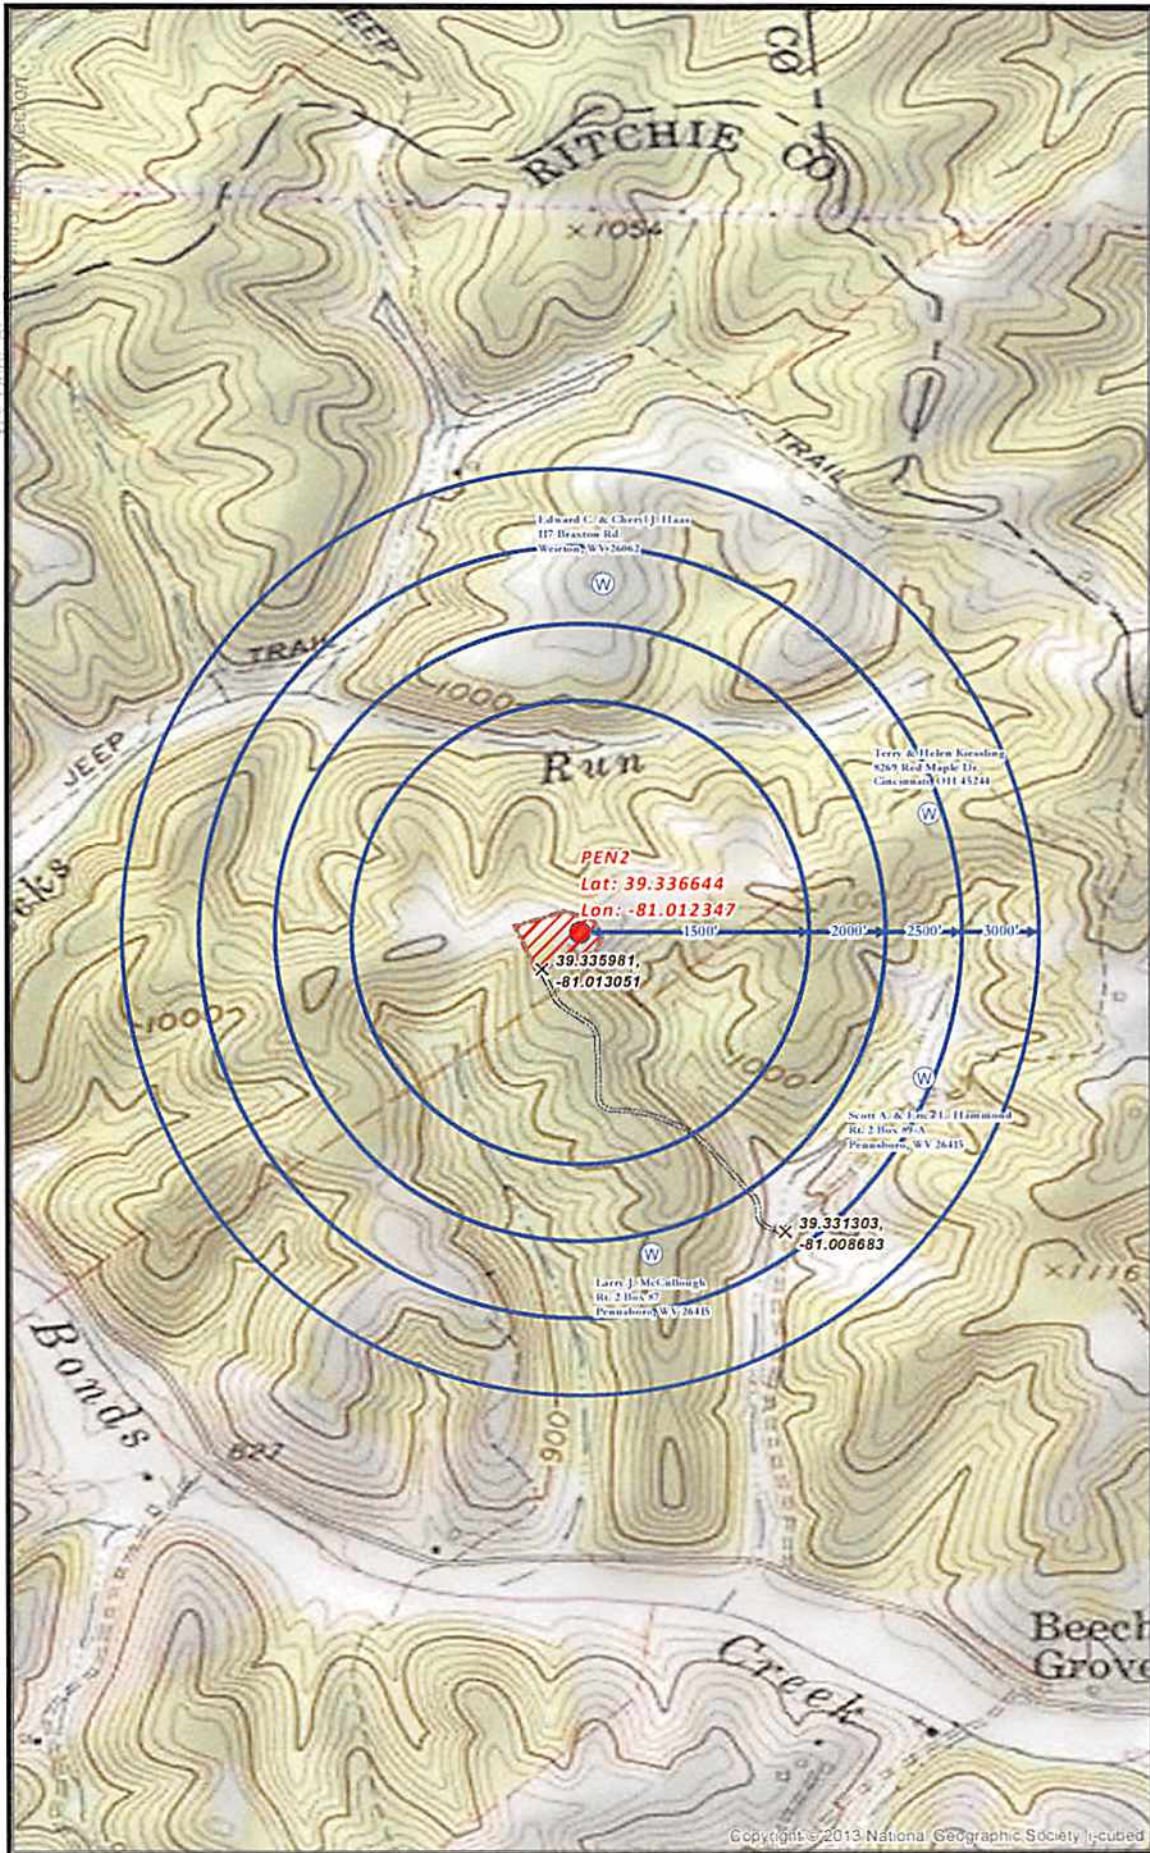


Plat spot A and C/P

85 10069

PENS2 SITE SAFETY PLAN
- WATER WELLS PROXIMITY -

Water Well Protection Buffer
 Proposed Road
 Road Intersection
 Vital Pass Boundary




noble energy

Disclaimer: All data is licensed for use by Noble Energy Inc. use only.

Date: 7/31/2013
Author: Christopher Glaser
04/04/2014
6

Well is located on topo map 13,972' feet south of Latitude: 39° 22' 30"

Well is located on topo map 3,538' feet west of Longitude: 81° 00' 00"

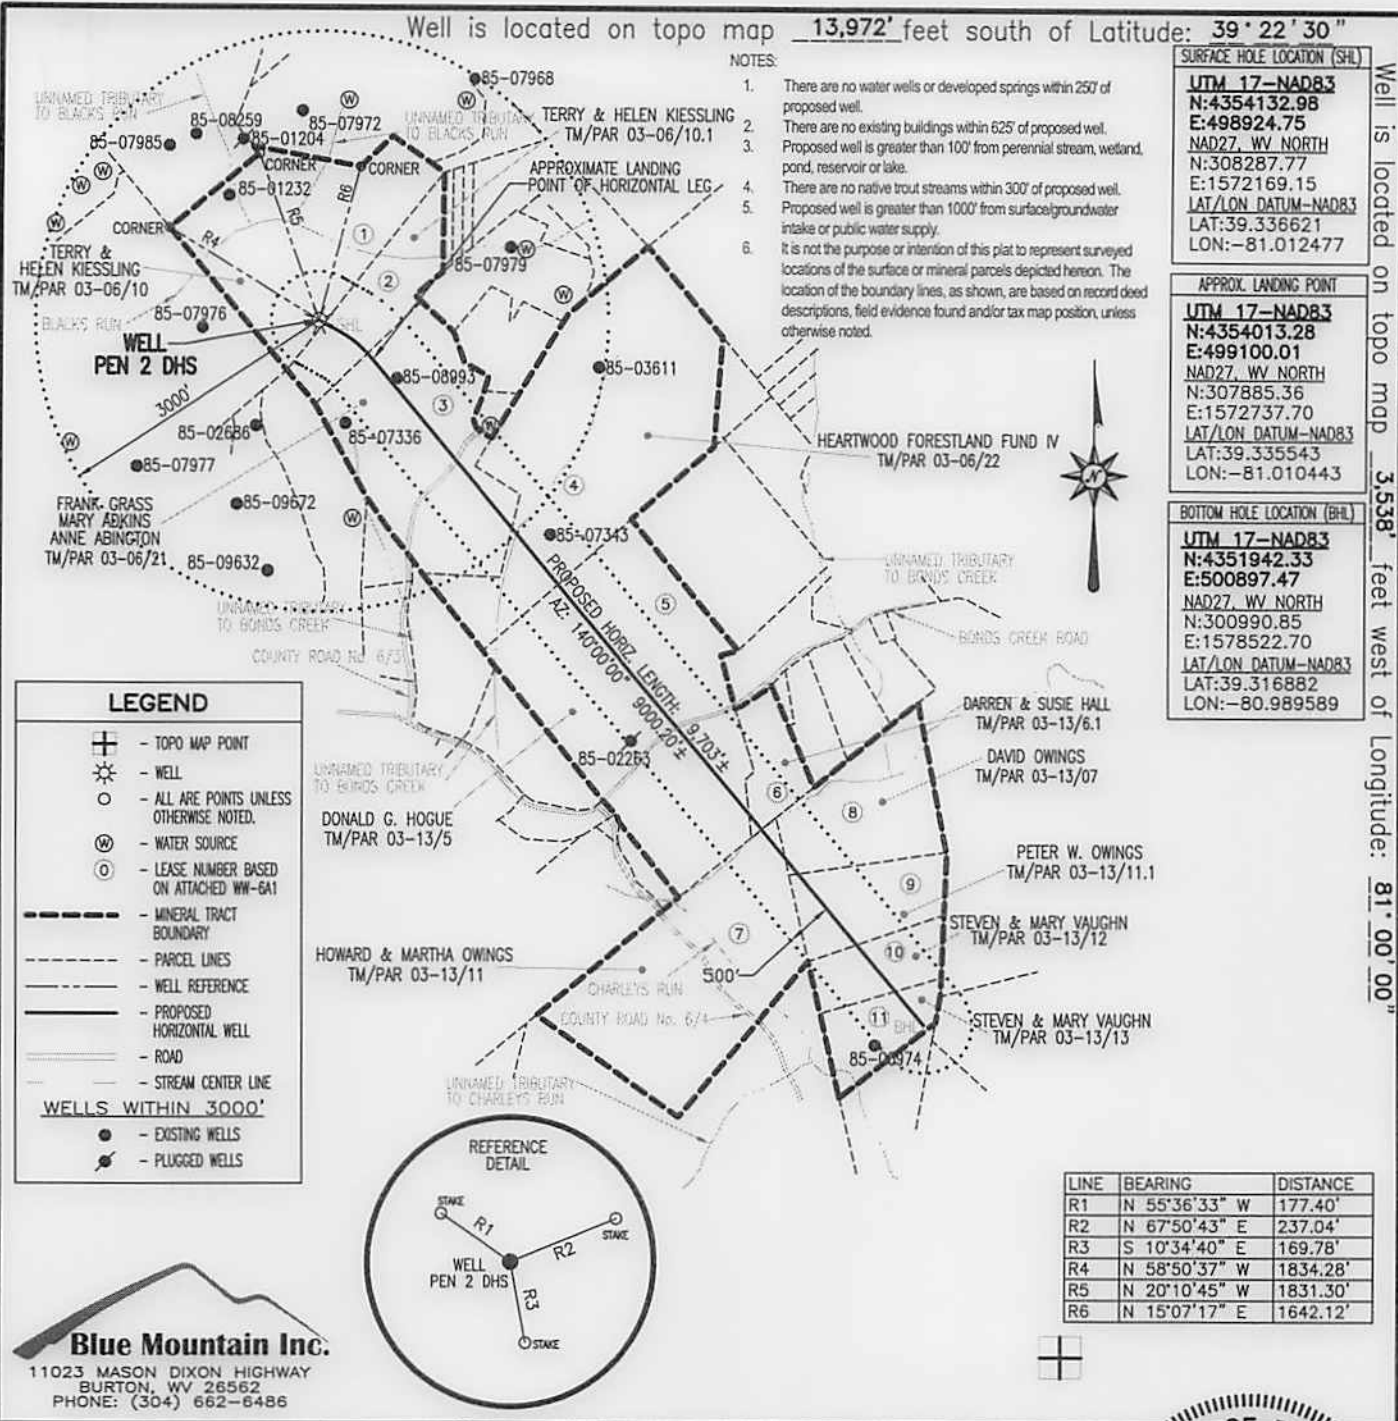

- NOTES:
1. There are no water wells or developed springs within 250' of proposed well.
 2. There are no existing buildings within 625' of proposed well.
 3. Proposed well is greater than 100' from perennial stream, wetland, pond, reservoir or lake.
 4. There are no native trout streams within 300' of proposed well.
 5. Proposed well is greater than 1000' from surface/groundwater intake or public water supply.
 6. It is not the purpose or intention of this plat to represent surveyed locations of the surface or mineral parcels depicted hereon. The location of the boundary lines, as shown, are based on record deed descriptions, field evidence found and/or tax map position, unless otherwise noted.

SURFACE HOLE LOCATION (SHL)
UTM 17-NAD83
N:4354132.98
E:498924.75
NAD27, WV NORTH
N:308287.77
E:1572169.15
IAT/LON DATUM-NAD83
LAT:39.336621
LOX:-81.012477

APPROX. LANDING POINT
UTM 17-NAD83
N:4354013.28
E:499100.01
NAD27, WV NORTH
N:307885.36
E:1572737.70
IAT/LON DATUM-NAD83
LAT:39.335543
LOX:-81.010443

BOTTOM HOLE LOCATION (BHL)
UTM 17-NAD83
N:4351942.33
E:500897.47
NAD27, WV NORTH
N:300990.85
E:1578522.70
IAT/LON DATUM-NAD83
LAT:39.316882
LOX:-80.989589

LEGEND

- ⊕ - TOPO MAP POINT
- ☼ - WELL
- - ALL ARE POINTS UNLESS OTHERWISE NOTED.
- ⊙ - WATER SOURCE
- ⊙ - LEASE NUMBER BASED ON ATTACHED WW-6A1
- - MINERAL TRACT BOUNDARY
- - PARCEL LINES
- - WELL REFERENCE
- - PROPOSED HORIZONTAL WELL
- - ROAD
- - STREAM CENTER LINE

WELLS WITHIN 3000'

- - EXISTING WELLS
- ⊙ - PLUGGED WELLS

LINE	BEARING	DISTANCE
R1	N 55°36'33" W	177.40'
R2	N 67°50'43" E	237.04'
R3	S 10°34'40" E	169.78'
R4	N 58°50'37" W	1834.28'
R5	N 20°10'45" W	1831.30'
R6	N 15°07'17" E	1642.12'

Blue Mountain Inc.
 11023 MASON DIXON HIGHWAY
 BURTON, WV 26562
 PHONE: (304) 662-6486

FILE #: PEN 2 DHS
 DRAWING #: PEN 2 DHS
 SCALE: 1" = 2000'
 MINIMUM DEGREE OF ACCURACY: 1/2500
 PROVEN SOURCE OF ELEVATION: U.S.G.S. MONUMENT THOMAS 1498.81'

I, THE UNDERSIGNED, HEREBY CERTIFY THAT THIS PLAT IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND SHOWS ALL THE INFORMATION REQUIRED BY LAW AND THE REGULATIONS ISSUED AND PRESCRIBED BY THE DEPARTMENT OF ENVIRONMENTAL PROTECTION.

Signed: *[Signature]*
 R.P.E.: _____ L.L.S.: P.S. No. 2000

GEORGE D. SIX
LICENSED
No. 2000
STATE OF WEST VIRGINIA
PROFESSIONAL SURVEYOR

PLACE SEAL HERE

(+) DENOTES LOCATION OF WELL ON UNITED STATES TOPOGRAPHIC MAPS WVDEP

OFFICE OF OIL & GAS
 601 57TH STREET
 CHARLESTON, WV 25304

DATE: JANUARY 30, 2014
 OPERATOR'S WELL #: PEN 2 DHS
 API WELL #: 47 85 MOD 10069 H6A
 STATE COUNTY PERMIT

Well Type: Oil Waste Disposal Production Deep
 Gas Liquid Injection Storage Shallow

WATERSHED: NORTH FORK HUGHES RIVER ELEVATION: 1084'±
 COUNTY/DISTRICT: RITCHIE / CLAY QUADRANGLE: ELLENBORO, WV 7.5'
 SURFACE OWNER: TERRY & HELEN KIESSLING ACREAGE: 79.242±
 OIL & GAS ROYALTY OWNER: SEE ATTACHED WW-6A1 ACREAGE: 675.359±

DRILL CONVERT DRILL DEEPER REDRILL FRACTURE OR STIMULATE
 PLUG OFF OLD FORMATION PERFORATE NEW FORMATION PLUG & ABANDON
 CLEAN OUT & REPLUG OTHER CHANGE (SPECIFY): _____

TARGET FORMATION: MARCELLUS ESTIMATED DEPTH: TVD: 6,324'± TMD: 15,700'±
 WELL OPERATOR NOBLE ENERGY, INC. DESIGNATED AGENT STEVEN M. GREEN
 Address 333 TECHNOLOGY DRIVE, SUITE 116 Address 500 VIRGINIA STREET EAST, UNITED CENTER SUITE 590
 City CANONSBURG State PA Zip Code 15317 City CHARLESTON State WV Zip Code 25301



04/04/2014