

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

December 30, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-8510082, issued to ANTERO RESOURCES CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: MYRTLE UNIT 2H

Farm Name: QUIMBY, FRANKLIN P.

API Well Number: 47-8510082

Permit Type: Horizontal 6A Well

Date Issued: 12/30/2013

Promoting a healthy environment.

API Number: 85-10082

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW-6B (9/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

		WELL WORK PE	EKWIT APPLICA	ATION	101	562
1) Well Operat	or: Antero F	Resources Corporation	494488557	085-Ritchie	Clay	Pullman 7.5'
- Paris			Operator ID	County	District	Quadrangle
2) Operator's V	Well Number	: Myrtle Unit 2H	Well Pa	ad Name: Edwin	Pad	
3) Farm Name/	Surface Own	ner: Franklin P. Quim	by Public Ro	oad Access: CR 1	10/4	
4) Elevation, co	urrent ground	d: ~1220' El	evation, proposed	d post-construction	n: 1191'	
5) Well Type	(a) Gas	Oil	Une	derground Storag	е	
	Other					
	(b)If Gas	Shallow	Deep	<u> </u>		
a. e. Soletove te		Horizontal				
6) Existing Pad	l: Yes or No	No		-		
		ion(s), Depth(s), Antic D, Anticipated Thickness-):
	75 7 7 3 7 7 7	Depth: 6800' TVD	186 - CEC <u>E A ECOL</u> E BELLEVIO			
(a) Froposed 16 (b) Formation at			Shale			
(0) Proposed T						
11) Proposed F			Zana dana dana			
(12) Approxima	ite Fresh Wa	ter Strata Depths:	116', 128', 202'			
				epths have been adj	usted accor	ding to surface elevation
4) Approxima	ite Saltwater	Depths:1366', 2140'	', 2254'			
5) Approxima	ite Coal Sear	n Depths: 194'			/	
l 6) Approxima	te Depth to	Possible Void (coal mi	ine, karst, other):	None anticipated	V	
		eation contain coal sear ent to an active mine?	ms Yes	No	/	
(a) If Yes, pro	ovide Mine I	nfo: Name:				DECEMBE
		Depth:			Offic	Ce of Oil and Gar
		Seam:				
		Owner:				NOV 2 5 2013
					W	/ Department of

Environmental Protection

WW-6B (9/13)

18)

CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill-up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	315'	315'	CTS, 438 Cu. Ft
Coal	9-5/8"	New	J-55	36#	2460'	2460'	CTS, 1002 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	18,000'	18,000'	4554 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7100'	
Liners						7,100	

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield (cu. ft./k)
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						1.10
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

PACKERS

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	

RECEIVED Office of Oil and Gas

DEC 27 2013

Dul 12-13

Page 2 of 3

WW-6B (9/13)

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:
Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale.
20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:
Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well."
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 18.74 acres
22) Area to be disturbed for well pad only, less access road (acres): 5.32 acres
23) Describe centralizer placement for each casing string:
Conductor: no centralizers Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th joint spaced up the hole to surface. Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th collar to surface. Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casing.
24) Describe all cement additives associated with each cement type:
Conductor: no additives, Class A cement. Surface: Class A cement with 2% calcium and 1/4 lb flake, 5 gallons of clay treat Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of clay treat Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51

25) Proposed borehole conditioning procedures:

Conductor: blowhole clean with air, run casing, 10 bbls fresh water.

Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.

Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20

Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing complete public brine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip Office of pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

*Note: Attach additional sheets as needed.

WV Department of Environmental Protection Page 3 of 3

API Number 47	_ 085	¥	19085
Operato	or's Well N	Vo. My	rtle Unit 2H

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Antero Resource	es Corporation	OP Code 494488557	
Watershed (HUC 10) Tributary	of Cabin Run	Quadrangle Pullman 7.5'	_
Elevation _1191'	County_Ritchie	District_Clay	
Do you anticipate using more th Will a pit be used? Yes	an 5,000 bbls of water to complete the	he proposed well work? Yes No	
If so, please describe ar	nticipated pit waste: No pit will be used at th	is site (Drilling and Flowback Fluids will be stored in tanks. Cuttings will be tanked and hauled or	ff site.
Will a synthetic liner be	e used in the pit? Yes No	✓ If so, what ml.? N/A	
Proposed Disposal Met	hod For Treated Pit Wastes:		
Unde Reuse Off S		nber_ locations when applicable. API# will be provided on Form WR-34 or disposal location) (Meadowfill Landfill Permit #SWF-1)) 032-98)
Will closed loop system be used	? If so, describe: Yes		
Drilling medium anticipated for	this well (vertical and horizontal)?	Surface - Air/Freshwater, oil based, etc. Dust/Stiff Foam, Production - Water Based Mu	d
-If oil based, what type	? Synthetic, petroleum, etc. N/A		
Additives to be used in drilling r	nedium? Please See Attachment		
Drill cuttings disposal method?	Leave in pit, landfill, removed offsit	te, etc. Stored in tanks, removed offsite and taken to landfill.	
-If left in pit and plan to	solidify what medium will be used	? (cement, lime, sawdust) N/A	
-Landfill or offsite nam	e/permit number? Meadowfill Landfill (Permit #SWF-1032-98)	
on August 1, 2005, by the Office provisions of the permit are enf law or regulation can lead to enf I certify under penalty application form and all attach obtaining the information, I be penalties for submitting false inf	e of Oil and Gas of the West Virginia orceable by law. Violations of any orcement action. of law that I have personally examinents thereto and that, based on lieve that the information is true, a formation, including the possibility of	tions of the GENERAL WATER POLLUTION PERI a Department of Environmental Protection. I understaterm or condition of the general permit and/or other mined and am familiar with the information submitting inquiry of those individuals immediately response accurate, and complete. I am aware that there are of fine or imprisonment.	and that the applicable ted on this onsible for
Company Official (Typed Name	Gerard G. Alberts	RECEIV	ED
Company Official Title Enviro	nmental & Regulatory Manager	Office of Oil a	and Gas
Subscribed and sworn before me	this 30 day of N	, 20LISA BOTTINELLI Notary Public Notary Public Notary Public Notary ID 201,240,72365 tal My Commission Expires Nov 9, 20	ment of

Form WW-9 Additives Attachment

SURFACE INTERVAL

- 1. Fresh Water
- 2. Soap -Foamer AC
- 3. Air

INTERMEDIATE INTERVAL

STIFF FOAM RECIPE:

- 1) 1 ppb Soda Ash / Sodium Carbonate-Alkalinity Control Agent
- 2) 1 ppb Congor 404 (11.76 ppg) / Corrosion Inhibitor
- 3) 4 ppb KLA-Gard (9.17 ppg) / Amine Acid Complex-Shale Stabilizer
- 4) 1ppb Mil Pac R / Sodium Carboxymethylcellulose-Filtration Control Agent
- 5) 12 ppb KCL / Potassium Chloride-inorganic Salt
- 6) Fresh Water 80 bbls
- 7) Air

PRODUCTION INTERVAL

1. Alpha 1655

Salt Inhibitor

2. Mil-Carb

Calcium Carbonate

3. Cottonseed Hulls

Cellulose-Cottonseed Pellets – LCM

4. Mil-Seal

Vegetable, Cotton & Cellulose-Based Fiber Blend - LCM

5. Clay-Trol

Amine Acid Complex - Shale Stabilizer

6. Xan-Plex

Viscosifier For Water Based Muds

7. Mil-Pac (All Grades)

Sodium Carboxymethylcellulose – Filtration Control Agent

8. New Drill

Anionic Polyacrylamide Copolymer Emulsion - Shale Stabilizer

9. Caustic Soda

Sodium Hydroxide – Alkalinity Control

10. Mil-Lime

Calcium Hydroxide - Lime

11. LD-9

Polyether Polyol – Drilling Fluid Defoamer

12. Mil Mica

Hydro-Biotite Mica – LCM

RECEIVED
Office of Oil and Gas

NOV 25 2013

13. Escaid 110

Drilling Fluild Solvent - Aliphatic Hydrocarbon

14. Ligco

Highly Oxidized Leonardite - Filteration Control Agent

15. Super Sweep

Polypropylene - Hole Cleaning Agent

16. Sulfatrol K

Drilling Fluid Additive - Sulfonated Asphalt Residuum

17. Sodium Chloride, Anhydrous

Inorganic Salt

18. D-D

Drilling Detergent – Surfactant

19. Terra-Rate

Organic Surfactant Blend

20. W.O. Defoam

Alcohol-Based Defoamer

21. Perma-Lose HT

Fluid Loss Reducer For Water-Based Muds

22. Xan-Plex D

Polysaccharide Polymer - Drilling Fluid Viscosifier

23. Walnut Shells

Ground Cellulosic Material - Ground Walnut Shells - LCM

24. Mil-Graphite

Natural Graphite – LCM

25. Mil Bar

Barite - Weighting Agent

26. X-Cide 102

Biocide

27. Soda Ash

Sodium Carbonate – Alkalinity Control Agent

28. Clay Trol

Amine Acid complex - Shale Stabilizer

29. Sulfatrol

Sulfonated Asphalt – Shale Control Additive

30. Xanvis

Viscosifier For Water-Based Muds

31. Milstarch

Starch - Fluid Loss Reducer For Water Based Muds

32. Mil-Lube

Drilling Fluid Lubricant

RECEIVED
Office of Oil and Gas

NOV 252013

Proposed Revegetation Tre	estment: Agree Dicturbed 18.7	4	1 =
Lime 2-4	cathient. Acres Disturbed	Prevegetation pH	
	Tons/acre or to correct to	pii	
	y or straw or Wood Fiber (will be use	d where needed)	
Fertilizer amount_	500	_lbs/acre	
Mulch_2-3	Tor	ns/acre	
Access Re		nment Pad (5.32) + Spoil Pads (4.94) = 18 eed Mixtures	.74 Acres
Т	Cemporary	Perman	ent
Seed Type	lbs/acre	Seed Type	lbs/acre
Tall Fescue	45	Tall Fescue	45
Perennial Rye Gr	rass 20	Perennial Rye Grass	20
*or type of grass seed re	equested by surface owner	*or type of grass seed reques	ted by
rawing(s) of road, location rovided)	n, pit and proposed area for land a lived 7.5' topographic sheet.	application (unless engineered plans inch	
novided)			
Orawing(s) of road, location provided) Photocopied section of involution and the provided by:			

DEC 27 2013



Well Site Safety Plan Antero Resources

Well Name: Hornet Unit 1H, Hornet Unit 2H, Myrtle Unit

1H, Myrtle Unit 2H, Miracle Unit 1H, Miracle Unit 2H, Kehrer Unit 1H, Kehrer Unit 2H, Moats

Unit 1H, Moats Unit 2H

Pad Location: EDWIN PAD

Ritchie County/ Clay District

GPS Coordinates: Lat 39°13'49.56"/Long 80°54'10.19" (NAD83)

Driving Directions:

Head south on WV 74 for 1.3 miles. Turn left onto Lynn Camp road. Stay on Lynn Camp road for 1.3 miles. Take slight right onto County Road 10/Cabin Run road. Continue onto County road 10/4 for 2.7 miles. Turn left to stay on County Road 10/4 and continue for .4 miles. Access road on left

Office of Oil and Gas

WV Department of vironmental Protect

SSP Page 1

west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01688

API/ID Number:

047-085-10082

Operator:

Antero Resources

Myrtle Unit 2H

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVEN DEC 1 6 2013 -

Source Summary

WMP-01688

API Number:

047-085-10082

Operator:

Antero Resources

Myrtle Unit 2H

Stream/River

Source

Ohio River @ Ben's Run Withdrawal Site

Tyler

Owner:

Ben's Run Land Company

Limited Partnership

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

6/6/2017

6/6/2018

12,160,000

39.46593

-81.110781

✓ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

3,360

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

West Fork River @ JCP Withdrawal

Harrison

Owner:

James & Brenda Raines

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

39.320913

Intake Latitude: Intake Longitude: -80.337572

6/6/2017

6/6/2018

12,160,000

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

2,000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

146.25

DEP Comments:

Source

West Fork River @ McDonald Withdrawal

Harrison

Owner:

David Shrieves

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

6/6/2017

6/6/2018

12,160,000

39.16761

-80.45069

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

3,000

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

106.30

DEP Comments:

• Source	West Fork Rive	er @ GAL Wit	hdrawal		Harrison	Owner:	David Shrieves
Start Date 6/6/2017	End Date 6/6/2018		Total Volume (gal) 12,160,000	Max. daily p	urchase (gal)	Intake Latitude: 39.16422	Intake Longitude: -80.45173
☑ Regulated	l Stream? Ston	ewall Jackson	Dam Ref. Gauge II	D: 30610 0	00	WEST FORK RIVER AT ENTE	RPRISE, WV
Max. Pump	rate (gpm):	2,000	Min. Gauge Read	ing (cfs):	175.00	Min. Passby (cf	fs) 106.30
	DEP Comme	nts:					
Source	Middle Island	Creek @ Mee	es Withdrawal Site		Pleasants	Owner:	Sarah E. Mees
Start Date 6/6/2017	End Date 6/6/2018		Total Volume (gal) 12,160,000	Max. daily p	urchase (gal)	Intake Latitude: 39.43113	Intake Longitude: -81.079567
☐ Regulated	I Stream?		Ref. Gauge II	D: 31145 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	3,360	Min. Gauge Read	ing (cfs):	52.59	Min. Passby (cf	rs) 47.63
	DEP Comme	nts:					
Source	Middle Island	Creek @ Daw	son Withdrawal		Tyler	Owner: G a	ary D. and Rella A. Dawson
Start Date 6/6/2017	End Date 6/6/2018		Total Volume (gal) 12,160,000	Max. daily p	urchase (gal)	Intake Latitude: 39.379292	Intake Longitude: -80.867803
☐ Regulated	Stream?		Ref. Gauge IE	D: 31145 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	3,000	Min. Gauge Read	ing (cfs):	76.03	Min. Passby (cf	(s) 28.83
	DEP Comme	nts:					

Tyler Owner: Forest C. & Brenda L. Source McElroy Creek @ Forest Withdrawal Moore Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date **End Date** -80.738197 39.39675 12,160,000 6/6/2017 6/6/2018 ☐ Regulated Stream? MIDDLE ISLAND CREEK AT LITTLE, WV Ref. Gauge ID: 3114500 Min. Gauge Reading (cfs): 74.77 Min. Passby (cfs) 13.10 Max. Pump rate (gpm): 1,000 **DEP Comments:** Source Meathouse Fork @ Gagnon Withdrawal Doddridge Owner: George L. Gagnon and Susan C. Gagnon **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date 6/6/2017 6/6/2018 12,160,000 39.26054 -80.720998 ☐ Regulated Stream? MIDDLE ISLAND CREEK AT LITTLE, WV Ref. Gauge ID: 3114500 Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 71.96 Min. Passby (cfs) 11.74 **DEP Comments:** Meathouse Fork @ Whitehair Withdrawal **Elton Whitehair** Source Doddridge Owner: Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/6/2017 6/6/2018 12,160,000 39.211317 -80.679592 ☐ Regulated Stream? Ref. Gauge ID: 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 69.73 Min. Passby (cfs) 7.28

DEP Comments:

Source Tom's Fork @ Erwin Withdrawal Doddridge John F. Erwin and Sandra E. **Erwin** Max. daily purchase (gal) Intake Latitude: Intake Longitude: **End Date** Total Volume (gal) Start Date -80.702992 6/6/2017 6/6/2018 12,160,000 39.174306 ☐ Regulated Stream? MIDDLE ISLAND CREEK AT LITTLE, WV Ref. Gauge ID: 3114500 Min. Gauge Reading (cfs): 69.73 Min. Passby (cfs) 0.59 Max. Pump rate (gpm): 1,000 **DEP Comments:** Arnold Creek @ Davis Withdrawal Doddridge Source Owner: **Jonathon Davis** Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/6/2017 6/6/2018 12,160,000 39.302006 -80.824561 ☐ Regulated Stream? Ref. Gauge ID: 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 69.73 Min. Passby (cfs) 3.08 **DEP Comments: Buckeye Creek @ Powell Withdrawal** Source Doddridge **Dennis Powell** Owner: Intake Latitude: Intake Longitude: Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) 6/6/2017 6/6/2018 12,160,000 39.277142 -80.690386 Regulated Stream? Ref. Gauge ID: MIDDLE ISLAND CREEK AT LITTLE, WV 3114500 Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 69.73

DEP Comments:

4.59

Min. Passby (cfs)

South Fork of Hughes River @ Knight Withdrawal Tracy C. Knight & Source Ritchie Owner: Stephanie C. Knight Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date **End Date** 39.198369 -80.870969 6/6/2017 6/6/2018 12,160,000 ☐ Regulated Stream? **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ Ref. Gauge ID: 3155220 3,000 Min. Gauge Reading (cfs): 39.80 Min. Passby (cfs) 1.95 Max. Pump rate (gpm): **DEP Comments:** Source North Fork of Hughes River @ Davis Withdrawal Ritchie Owner: Lewis P. Davis and Norma J. Davis **End Date** Total Volume (gal) Max. daily purchase (gal) Start Date Intake Latitude: Intake Longitude: 6/6/2017 6/6/2018 12,160,000 39.322363 -80.936771 ☐ Regulated Stream? Ref. Gauge ID: 3155220 **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ Min. Gauge Reading (cfs): Max. Pump rate (gpm): 1,000 35.23 Min. Passby (cfs) 2.19

DEP Comments:

Source Summary 047-085-10082 Operator: Antero Resources WMP-01688 API Number: Myrtle Unit 2H **Purchased Water** Pleasants Select Energy Ohio River @ Select Energy Owner: Source Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date End Date 6/6/2018 12.160.000 500.000 39.346473 -81.338727 6/6/2017 ✓ Regulated Stream? Ohio River Station: Racine Dam Ohio River Min. Flow Ref. Gauge ID: 9999998 Max. Pump rate (gpm): 1,680 Min. Gauge Reading (cfs): 7,216.00 Min. Passby (cfs) **DEP Comments:** Refer to the specified station on the National Weather Service's Ohio River forecast website: http://www.erh.noaa.gov/ohrfc//flows.shtml Middle Island Creek @ Solo Construction Source Pleasants Owner: Solo Construction, LLC Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/6/2017 6/6/2018 12,160,000 1,000,000 39.399094 -81.185548 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs) DEP Comments: Elevation analysis indicates that this location has the same elevation as Middle Island Creek's pour point into the Ohio River. As such, it is deemed that water flow at this location is heavily influenced by the Ohio River. Source Claywood Park PSD Wood Owner: Claywood Park PSD Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/6/2017 6/6/2018 12,160,000 ✓ Regulated Stream? Ref. Gauge ID: 9999998 Ohio River Station: Racine Dam Max. Pump rate (gpm): Min. Gauge Reading (cfs): 7,216.00 Min. Passby (cfs) **DEP Comments:** Elevation analysis indicates that this location has approximately the same elevation as Little Kanawha's pour point into the Ohio River. As such, it is deemed that water flow at this location is heavily influenced by the Ohio River.

Source

Sun Valley Public Service District

☑ Regulated Stream? **Stonewall Jackson Dam** Ref. Gauge ID:

Harrison

Owner:

Sun Valley PSD

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

6/6/2017

6/6/2018

12,160,000

200,000

Max. Pump rate (gpm):

3061000


WEST FORK RIVER AT ENTERPRISE, WV

Min. Gauge Reading (cfs):


171.48

Min. Passby (cfs)

DEP Comments:

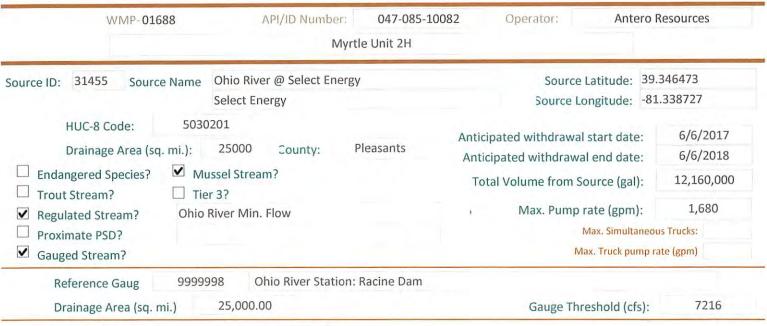



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	50,956.00	4	-
2	54,858.00		-
3	73,256.00	-	-
4	62,552.00		
5	43,151.00	1	-
6	27,095.00	- 0	*
7	17,840.00		4
8	14,941.00		
9	14,272.00		÷
10	17,283.00	4	*
11	29,325.00	4	*
12	46,050.00	÷	-

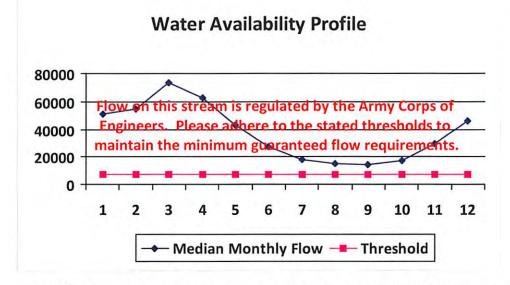

Water Availability Assessment of Location

Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	3.74
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

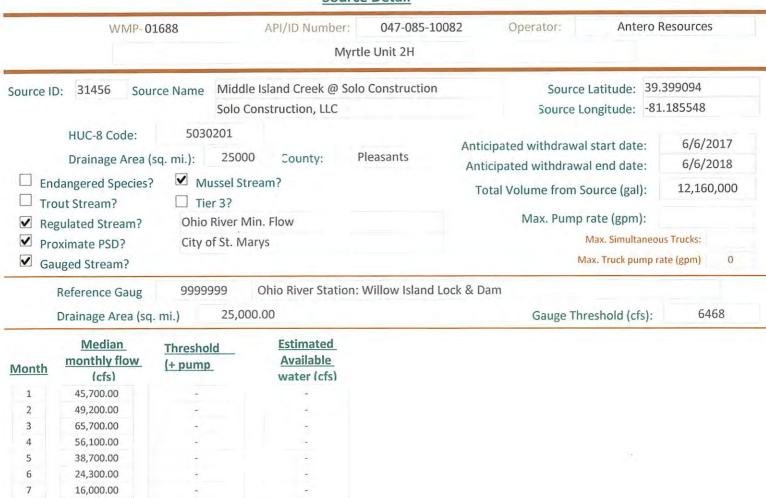

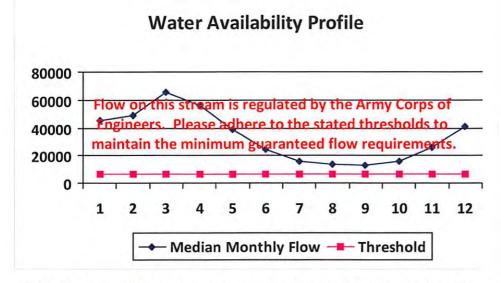

Min. Gauge Reading (cfs): Passby at Location (cfs):	
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	-

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

8

9

10 11

12


13,400.00

12,800.00 15,500.00

26,300.00

41,300.00

			Sour	ce Detail		
	WMP-0	1688	API/ID Number:	047-085-	10082 Operator: Antero I	Resources
			Му	tle Unit 2H		
Source II	D: 31457 Sou	rce Name Clayw	ood Park PSD		Source Latitude: -	
		Clayw	ood Park PSD		Source Longitude: -	
	HUC-8 Code: Drainage Area (5030203 (sq. mi.): 2500	0 County:	Wood	Anticipated withdrawal start date:	6/6/2017
	dangered Species?		ream?		Anticipated withdrawal end date: Total Volume from Source (gal):	6/6/2018 12,160,000
✓ Re	gulated Stream?				Max. Pump rate (gpm):	
	oximate PSD?	Claywood Pa	ark PSD		Max. Simultaneou	us Trucks: 0
	uged Stream?	(3.5)			Max. Truck pump rate (gpm) 0	
	Drainage Area (so	. 1111.)	00.00		Gauge Threshold (cfs):	7216
Month	Median monthly flow	Threshold (+ pump	Estimated Available		Gauge Threshold (cfs):	7216
Month	Median monthly flow (cfs)	Threshold	Estimated		Gauge Threshold (cfs):	7216
1	Median monthly flow (cfs) 50,956.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2	Median monthly flow (cfs) 50,956.00 54,858.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2 3	Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2	Median monthly flow (cfs) 50,956.00 54,858.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2 3 4	Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2 3 4 5	Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2 3 4 5 6	Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 27,095.00 17,840.00 14,941.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2 3 4 5 6 7	Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 27,095.00 17,840.00 14,941.00 14,272.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2 3 4 5 6 7 8 9	Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 27,095.00 17,840.00 14,941.00 14,272.00 17,283.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216
1 2 3 4 5 6 7 8	Median monthly flow (cfs) 50,956.00 54,858.00 73,256.00 62,552.00 43,151.00 27,095.00 17,840.00 14,941.00 14,272.00	Threshold	Estimated Available		Gauge Threshold (cfs):	7216

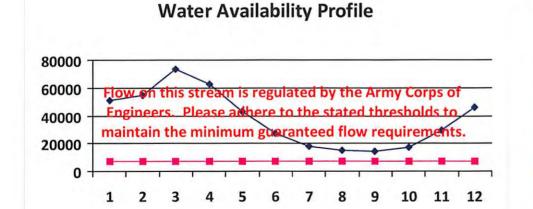

Median Monthly Flow — Threshold

Water Availability Assessment of Location Base Threshold (cfs): Upstream Demand (cfs): Downstream Demand (cfs): Pump rate (cfs): Headwater Safety (cfs): Ungauged Stream Safety (cfs): O.00 Min. Gauge Reading (cfs): Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source Detail		
	WMP-0	1688	API/ID Number: 047-085- Myrtle Unit 2H	10082 Operator: Antero R	Resources
Source II	D: 31458 Sou		Valley Public Service District Valley PSD	Source Latitude: -	
☐ Tro ✓ Re ☐ Pro	HUC-8 Code: Drainage Area (dangered Species) out Stream? gulated Stream? oximate PSD? nuged Stream?	Mussel S		Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneou Max. Truck pump ra	
	Reference Gaug Drainage Area (sc	3061000 1. mi.) 75	WEST FORK RIVER AT ENTERPR	ISE, WV Gauge Threshold (cfs):	234
Month 1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 1,200.75 1,351.92 1,741.33 995.89 1,022.23 512.21 331.86 316.87 220.48 216.17 542.45	Threshold (+ pump	Estimated Available water (cfs)		
2000 1500	'	nis stream is re	ability Profile		-
1000 500	maintain t		re to the stated thresholds to guaranteed flow requiremen		0.00

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

12

9

1

2

3

5

6

7


Median Monthly Flow — Threshold


0.00

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs):

Passby at Location (cfs):

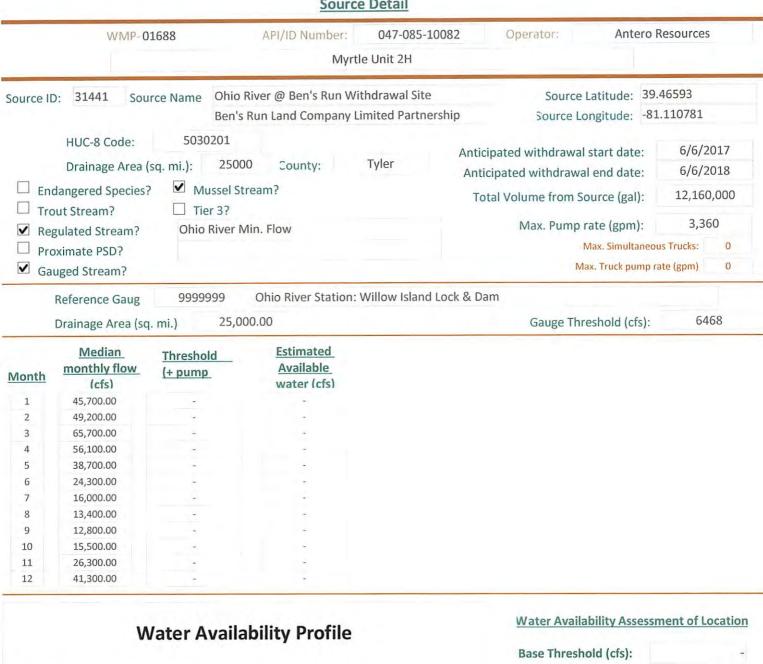

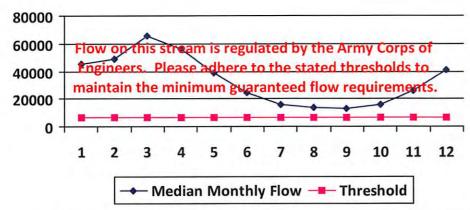


Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	7.49
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.




Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	1,630.82	4	-
2	1,836.14		~
3	2,365.03		
4	1,352.59	W.	~
5	1,388.37	(*)	2
6	695.67		100
7	450.73	~	+1
8	430.37	14	4.
9	299.45		-
10	293.59	+	
11	736.74		4
12	1.257.84	-	-

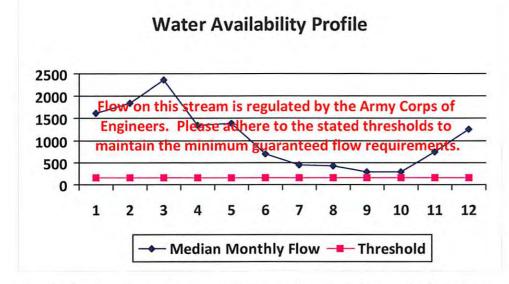

Water Availability Assessment of Location

Base Threshold (cfs):	
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

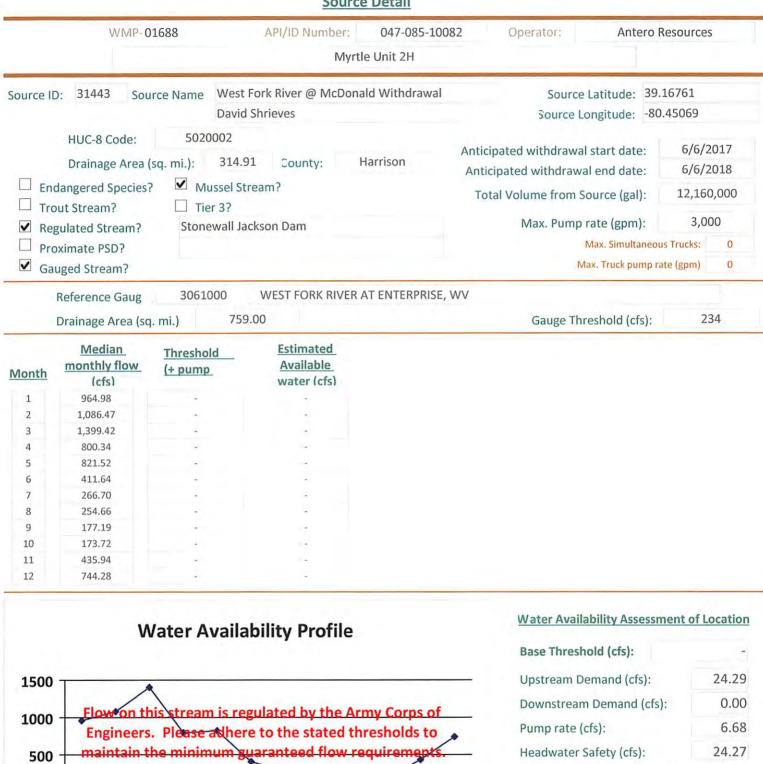

10

11

12

9

1

2

5


Median Monthly Flow — Threshold

0.00


Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

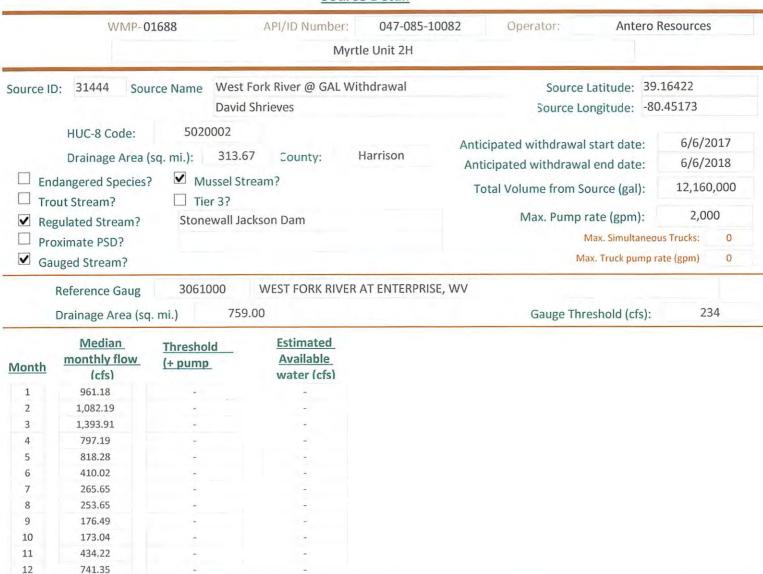



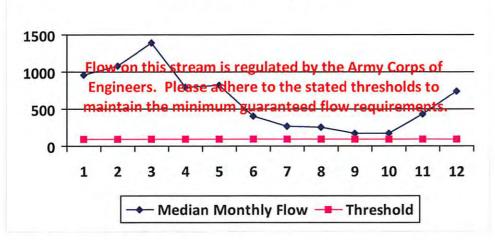


Water Availability Assessment of Location

Base Threshold (cfs):	
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	24.18
Ungauged Stream Safety (cfs):	0.00

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.




Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	519.88	55.12	465.14
2	653.95	55.12	599.22
3	731.75	55.12	677.01
4	543.38	55.12	488.65
5	286.64	55.12	231.90
6	100.10	55.12	45.36
7	56.65	55.12	1.91
8	46.64	55.12	-8.10
9	23.89	55.12	-30.85
10	30.01	55.12	-24.72
11	146.56	55.12	91.83
12	358.10	55.12	303.37

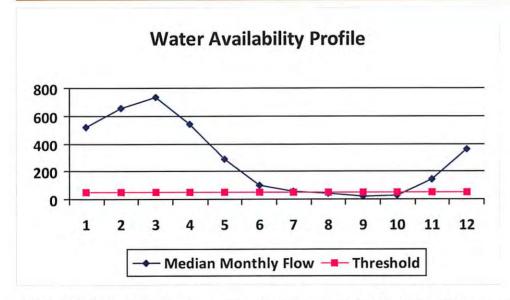


Min. Gauge Reading (cfs): Passby at Location (cfs):	52.49 47.63
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	7.49
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	47.63

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

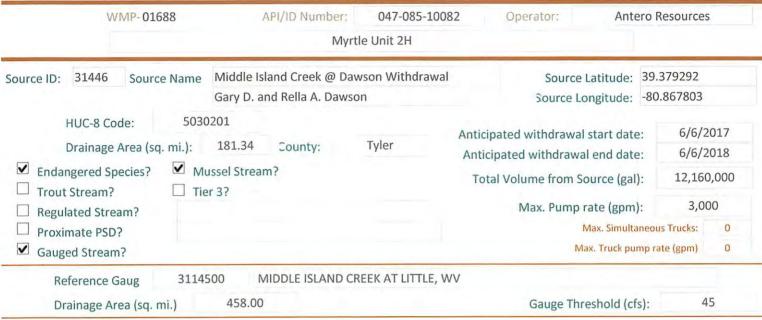

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	194.47	42.06	152.68
2	244.62	42.06	202.83
3	273.72	42.06	231.93
4	203.26	42.06	161.47
5	107.22	42.06	65.43
6	37.44	42.06	-4.35
7	21.19	42.06	-20.60
8	17.45	42.06	-24.34
9	8.94	42.06	-32.85
10	11.23	42.06	-30.56
11	54.82	42.06	13.04
12	133.96	42.06	92.17

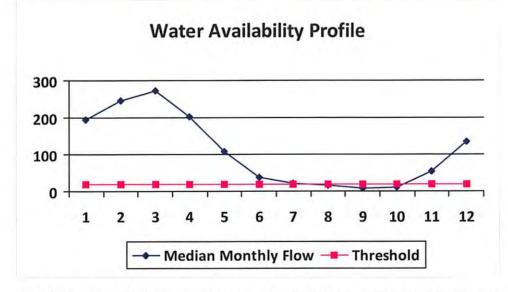


	Water Availability	Assessment of	Location
--	--------------------	---------------	----------

Passby at Location (cfs):	28.82
Min. Gauge Reading (cfs):	76.03
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	4.45
Pump rate (cfs):	6.68
Downstream Demand (cfs):	6.55
Upstream Demand (cfs):	13.10
Base Threshold (cfs):	17.82



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	95.28	19.78	75.68
2	119.86	19.78	100.25
3	134.11	19.78	114.51
4	99.59	19.78	79.99
5	52.54	19.78	32.93
6	18.35	19.78	-1.26
7	10.38	19.78	-9.22
8	8.55	19.78	-11.05
9	4.38	19.78	-15.23
10	5.50	19.78	-14.10
11	26.86	19.78	7.26
12	65.63	19.78	46.03

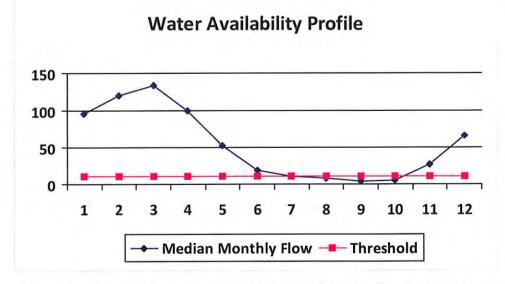

Water Availability	Assessment	of	Location
avacci Availability	MOSCOSIIICIIC	01	Locucion

Base Threshold (cfs):	8.73
Upstream Demand (cfs):	4.46
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.23
Headwater Safety (cfs):	2.18
Ungauged Stream Safety (cfs):	2.18
Min. Gauge Reading (cfs):	74.19
Passby at Location (cfs):	13.09

WMP-01688	API/ID Number	047-085-1008	2 Operator: Anto	ero Resources	
	M	yrtle Unit 2H			
Source ID: 31448 Source Name	Meathouse Fork @ Gagr	non Withdrawal	Source Latitude:	39.26054	
	George L. Gagnon and S	usan C. Gagnon	Source Longitude:	-80.720998	
Drainage Area (sq. mi.): ✓ Endangered Species? ✓ M	0201 60.6 County: lussel Stream? er 3?	Doddridge	Anticipated withdrawal start date Anticipated withdrawal end date Total Volume from Source (gal	e: 6/6/201	18
Regulated Stream?			Max. Pump rate (gpm): 1,000	
Proximate PSD?			Max. Simulta	neous Trucks:	0
☐ Gauged Stream?			Max. Truck pu	mp rate (gpm)	0
Reference Gaug 3114	500 MIDDLE ISLAND	CREEK AT LITTLE, W	V		
Drainage Area (sq. mi.)	458.00		Gauge Threshold (cf	(s): 45	

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	64.99	13.39	51.70
2	81.75	13.39	68.46
3	91.47	13.39	78.19
4	67.93	13.39	54.64
5	35.83	13.39	22.55
6	12.51	13.39	-0.77
7	7.08	13.39	-6.20
8	5.83	13.39	-7.45
9	2.99	13.39	-10.30
10	3.75	13.39	-9.53
11	18.32	13.39	5.04
12	44.76	13.39	31.48

Water Availability Profile Median Monthly Flow — Threshold

Base Threshold (cfs):	5.95
Upstream Demand (cfs):	2.23
Downstream Demand (cfs):	2.81
Pump rate (cfs):	2.23
Headwater Safety (cfs):	1.49
Ungauged Stream Safety (cfs):	1.49

Water Availability Assessment of Location

Min. Gauge Reading (cfs): 71.96

Passby at Location (cfs): 11.74

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01688		API/ID Number:	047-085-1008	2 Operator:	Antero F	Resources
		Му	rtle Unit 2H			
Source ID: 31449 Source Na	me Meathou	se Fork @ White	ehair Withdrawal	Source I	Latitude: 39.	211317
	Elton Wh	nitehair		Source Lo	ngitude: -80	.679592
HUC-8 Code: Sprainage Area (sq. mi.	5030201): 30.37	County:	Doddridge	Anticipated withdrawal Anticipated withdrawal		6/6/2017 6/6/2018
✓ Endangered Species? ✓ Trout Stream?	Mussel Strea	m?		Total Volume from Sc		12,160,000
Regulated Stream?				Max. Pump r	ate (gpm):	1,000
☐ Proximate PSD? ☐ Gauged Stream?					Max. Simultaneou ax. Truck pump ra	
Reference Gaug 3	114500 N	MIDDLE ISLAND	CREEK AT LITTLE, W	V		
Drainage Area (sq. mi.)	458.00) i		Gauge Thre	eshold (cfs):	45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	32.57	6.70	26.15
2	40.97	6.70	34.55
3	45.84	6.70	39.42
4	34.04	6.70	27.62
5	17.96	6.70	11.54
6	6.27	6.70	-0.15
7	3.55	6.70	-2.87
8	2.92	6.70	-3.50
9	1.50	6.70	-4.92
10	1.88	6.70	-4.54
11	9.18	6.70	2.76
12	22.43	6.70	16.01

Water Availability Profile Median Monthly Flow — Threshold

Water Availability Assessment	of Location
Base Threshold (cfs):	2.98

Upstream Demand (cfs):

Downstream Demand (cfs):

Pump rate (cfs):

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs):

2.98

2.98

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00


Passby at Location (cfs):

7.29

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	4.30	2.82	1.88
2	5.41	2.82	2.98
3	6.05	2.82	3.63
4	4.49	2.82	2.07
5	2.37	2.82	-0.05
6	0.83	2.82	-1.60
7	0.47	2.82	-1.96
8	0.39	2.82	-2.04
9	0.20	2.82	-2.23
10	0.25	2.82	-2.18
11	1.21	2.82	-1.21
12	2.96	2.82	0.54

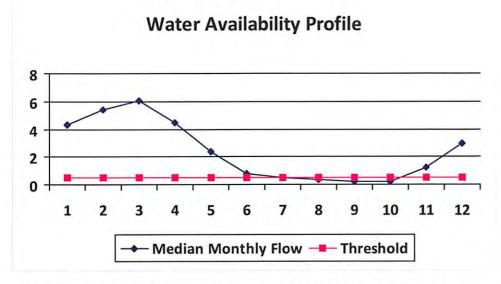


Water	Availability	Assessment	of	Location

Ungauged Stream Safety (cfs):	0.10
Headwater Safety (cfs):	0.10
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	0.39

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	22.34	5.30	17.29
2	28.10	5,30	23.05
3	31.44	5.30	26.39
4	23.35	5.30	18.30
5	12.32	5.30	7.26
6	4.30	5.30	-0.75
7	2.43	5.30	-2.62
8	2.00	5.30	-3.05
9	1.03	5.30	-4.03
10	1.29	5.30	-3.76
11	6.30	5.30	1.25
12	15.39	5.30	10.34

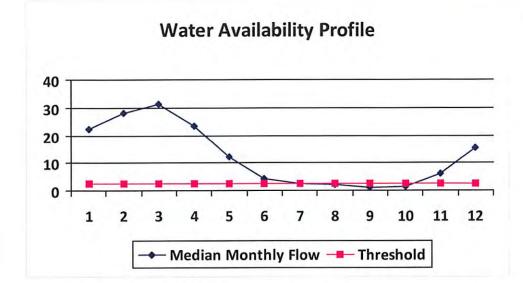


Water Availability	Assessment	of	Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	69.73 3.07
Ungauged Stream Safety (cfs):	0.51
Headwater Safety (cfs):	0.51
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	2.05



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	33.41	6.82	26.95
2	42.02	6.82	35.56
3	47.02	6.82	40.56
4	34.92	6.82	28.46
5	18.42	6.82	11.96
6	6.43	6.82	-0.03
7	3.64	6.82	-2.82
8	3.00	6.82	-3.46
9	1.53	6.82	-4.92
10	1.93	6.82	-4.53
11	9.42	6.82	2.96
12	23.01	6.82	16.55

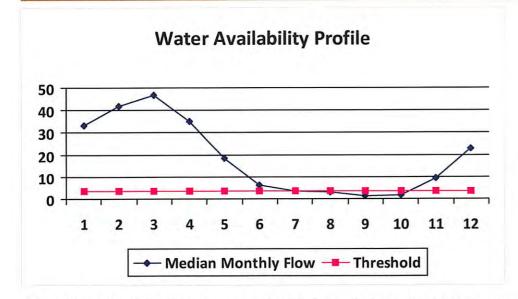

Water	Availability	Assessment	of	Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	69.73 4.59
Ungauged Stream Safety (cfs):	0.77
Headwater Safety (cfs):	0.77
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	3.06



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45.67	14.26	31.44
2	59.55	14.26	45.31
3	65.21	14.26	50.97
4	36.87	14.26	22.63
5	25.86	14.26	11.63
6	13.90	14.26	-0.33
7	6.89	14.26	-7.34
8	3.98	14.26	-10.25
9	4.79	14.26	-9.45
10	5.20	14.26	-9.04
11	15.54	14.26	1.30
12	32.06	14.26	17.82

Water Availability Profile 80 40 20 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Min. Gauge Reading (cfs): Passby at Location (cfs):	39.80 1.95
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.39
Pump rate (cfs):	6.68
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	5.62
Base Threshold (cfs):	1.56



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	42.64	4.42	38.36
2	55.59	4.42	51.32
3	60.88	4.42	56.60
4	34.42	4.42	30.14
5	24.15	4.42	19.87
6	12.98	4.42	8.70
7	6.44	4.42	2.16
8	3.72	4.42	-0.56
9	4.47	4.42	0.19
10	4.85	4.42	0.57
11	14.50	4.42	10.23
12	29.93	4.42	25.65

80 60 40 20 0 1 2 3 4 5 6 7 8 9 10 11 12

Median Monthly Flow — Threshold

Water Availability Profile

Water Availability Assessment	of Location
Base Threshold (cfs):	1.46
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.23
Headwater Safety (cfs):	0.36
Ungauged Stream Safety (cfs):	0.36
Min. Gauge Reading (cfs):	35.23
Passby at Location (cfs):	2.19

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

west virginia department of environmental protection



Water Management Plan: **Secondary Water Sources**



WMP-01688

API/ID Number

047-085-10082

Operator:

Antero Resources

Myrtle Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 31459 Source Name

City of Salem Reservior (Lower Dog Run)

Source start date:

6/6/2017

Public Water Provider

Source end date:

6/6/2018

Source Lat:

39.28834

Source Long:

-80.54966

County

Harrison

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

12,160,000

DEP Comments:

WMP-01688	API/ID Number	047-085-10082	Operator:	Antero Resources
	Myr	tle Unit 2H		

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID:	31460	Source Name	Pennsboro Lak	e		Source start date:	6/6/2017
						Source end date:	6/6/2018
		Source Lat:	39.281689	Source Long:	-80.925526	County	Ritchie
		Max. Daily Pu	rchase (gal)		Total Volum	ne from Source (gal):	12,160,000

Sourc	e ID:	31461	Source Name	Powers Lake (V	Vilderness Water	Park Dam)	Source start date	6/6/2017
				Private Owner			Source end date	6/6/2018
			Source Lat:	39.255752	Source Long:	-80.463262	County	Harrison
			Max. Daily Pu	rchase (gal)		Total Volu	me from Source (gal):	12,160,000
		DEP Co	mments:					

WMP-01688 API/ID Number 047-085-10082 Operator: Antero Resources

Myrtle Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 31462 Source Name Powers Lake Two Source start date: 6/6/2017 Source end date: 6/6/2018

Source Lat: 39.247604 Source Long: -80.466642 County Harrison

Max. Daily Purchase (gal) Total Volume from Source (gal): 12,160,000

DEP Comments:

Myrtle Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Other

Source ID: 31463 Source Name Poth Lake (Landowner Pond) Source start date: 6/6/2017

Private Owner Source end date:

Source Lat: 39.221306 Source Long: -80.463028 County Harrison

Max. Daily Purchase (gal) Total Volume from Source (gal): 12,160,000

DEP Comments:

Source ID: 31464 Source Name Williamson Pond (Landowner Pond) Source start date: 6/6/2017
Source end date: 6/6/2018

Source Lat: 39.19924 Source Long: -80.886161 County Ritchie

Max. Daily Purchase (gal) Total Volume from Source (gal): 12,160,000

DEP Comments:

6/6/2018

WMP-01688	API/ID Number	047-085-10082	Operator:	Antero Resources	

Myrtle Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 31465		Source Name	Eddy Pond (La	ndowner Pond)	Source start date:	6/6/2017	
						Source end date:	6/6/2018
		Source Lat:	39.19924	Source Long:	-80.886161	County	Ritchie
		Max. Daily Purchase (gal)			Total Volume from Source (gal):		12,160,000

Source ID:	31466	Source Name	Hog Lick Qua	rry		Source start date	: 6/6/2017
			Industrial Fa	cility		Source end date	6/6/2018
	S	Source Lat:	39.419272	Source Long:	-80.217941	County	Marion
Max. D	Max. Daily Pu	rchase (gal)	1,000,000	Total Volu	me from Source (gal):	12,160,000	

WMP-01688	API/ID Number	047-085-10082	Operator:	Antero Resources
	Myr	tle Unit 2H		


Important:


For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 31467	31467	Source Name	Glade Fork Mi	ine	Source start date:	6/6/2017	
			Industrial Fac	ility		Source end date:	6/6/2018
		Source Lat:	38.965767	Source Long:	-80.299313	County	Upshur
		Max. Daily Pu	rchase (gal)	1,000,000	Total Volu	me from Source (gal):	12,160,000

Recycled Frac Water

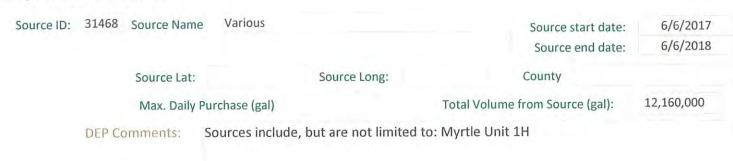

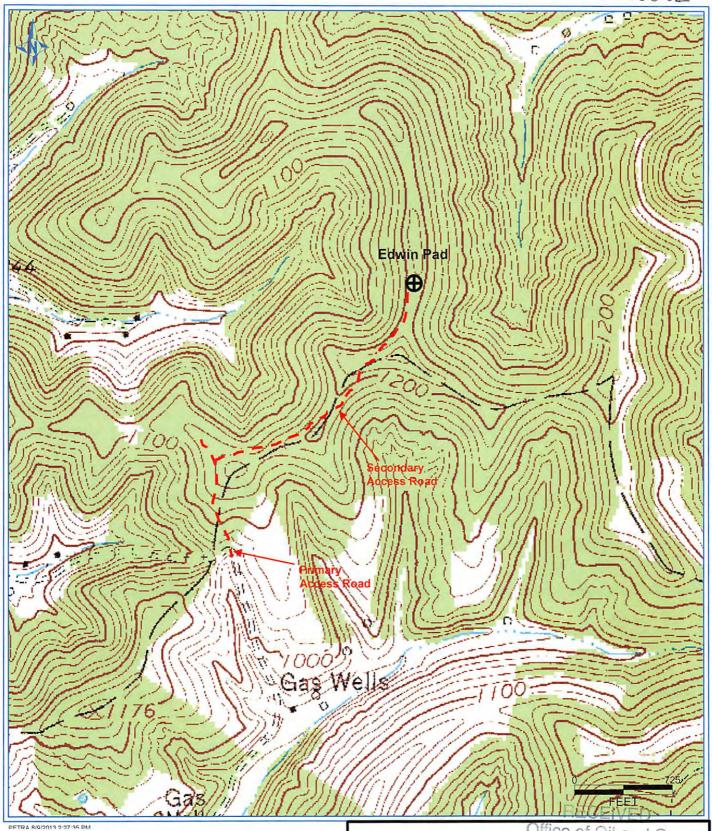

Antero Resources Corporation

Appalachian Basin 2013 Myrtle Unit 2H

Ritchie County

man Protection

Quadrangle: Pullman Watershed: Little Kanawha

District: Clay Date: 8-9-2013

