

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street, S.E. Charleston, WV 25304 (304) 926-0450 fax: (304) 926-0452

Austin Caperton, Cabinet Secretary www.dep.wv.gov

March 7, 2018 PERMIT MODIFICATION APPROVAL Horizontal 6A / New Drill

SWN PRODUCTION COMPANY, LLC POST OFFICE BOX 12359

SPRING, TX 773914954

Re:

Permit Modification Approval for MARK HICKMAN OHI 10H

47-069-00250-00-00

Modified Surface Casing with Inspector's Approval

SWN PRODUCTION COMPANY, LLC

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

If there are any questions, please feel free to contact me at (304) 926-0450.

James A. Martin

Chief

Operator's Well Number: MARK HICKMAN OHI 10H

Farm Name: LAWRENCE GRANT HICKMAN, CECIL LEE HICKMAN & CAR

U.S. WELL NUMBER: 47-069-00250-00-00

Horizontal 6A / New Drill

Date Issued: March 7, 2018

Promoting a healthy environment.

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION. OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

		-			
1) Well Operator: SWN F	Production Co., LLC	494512924	069-Ohio	Triadelph	Valley Grove
		Operator ID	County	District	Quadrangle
2) Operator's Well Number	Mark Hickman OH	1 10H Well Pa	ad Name: Mar	k Hickman F	
3) Farm Name/Surface Own	ner: Mark Hickman	Public Ro	ad Access: Da	allas Pike	
4) Elevation, current ground	d: 1281' Fi	levation, proposed	nost-construe	tion: 1281	
5) YY 11 m		Uno			
Other		- Cik	ierground Stor	age	
(b)If Gas	Shallow X	Deep			
	Horizontal X			-1	4.0
6) Existing Pad: Yes or No	Yes	The state of the s		C 15)	Q 2.14.18
7) Proposed Target Formation	on(s), Depth(s), Antic	ipated Thickness	and Expected 1	Praccura(a).	
Target Formation- Marcellus, T	arget Top TVD- 6810' Targ	get Base TVD- 6854',	Anticipated Thickn	ess-44', Assoc	iated Pressure- 4440
Proposed Total Vertical I					
) Formation at Total Vertic					
0) Proposed Total Measure					
1) Proposed Horizontal Leg	g Length: 8418.21'				
2) Approximate Fresh Wate	er Strata Depths:	563'			
3) Method to Determine Fro	esh Water Denths: fr	om nearby wate	rwells salinit	v profile and	Llogo
4) Approximate Saltwater I		The state of the s	Wons, Samme	y prome and	logs
5) Approximate Coal Seam	William Control				
6) Approximate Depth to Pe		ne, karst, other):	Possible void	713'	
		-			
7) Does Proposed well loca irectly overlying or adjacen	tion contain coal seam			V	
		165	No	^	Promi
(a) If Yes, provide Mine In	fo: Name:				Office of Oil and G
	Depth:				FFR 10 a
	Seam:				FEB 1 6 2018
	Owner:			E	WV Department of nvironmental Protect
					. rotec

Page 1 of 3

18)

CASING AND TUBING PROGRAM

TYPE		Mari					
	Size (in)	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling (ft)	INTERVALS: Left in Well (ft)	CEMENT: Fill-up (Cu. Ft.)/CTS
Conductor	20"	New	H-40	94#	100'	100'	CTS
Fresh Water	13 3/8"	New	H-40	48#	810'		
Coal	9 5/8"	New	J-55	36#		810'	748 sx/CTS
Intermediate	7"				2163'	2163'	802 sx/CTS
	1	New	J-55	20#	If Needed	If Needed	If Needed/As Needed
Production	5 1/2"	New	HCP-110	20#	15480'	15480'	Read Billion Tail 2002by strade informations
Tubing	2 3/8"	New	HCP-110	4.7#	Approx. 6702'	Approx. 6702'	
Liners					77.2 0702	71pprox. 0702	

C. Slo 2.14.18

TYPE			Well	1			
	Size (in)	Wellbore Diameter (in)	Wall Thickness (in)	Burst Pressure (psi)	Anticipated Max. Internal Pressure (psi)	Cement Type	Cement <u>Yield</u> (cu. ft./k)
Conductor	20"	30"	0.25	2120	81	Class A	1.19/50% Excess
Fresh Water	13 3/8"	17.5"	0.380	2740	633		1.19/50% Excess
Coal	9 5/8"	12 1/4"	0.395	3950	1768		1.19/50% Excess
Intermediate	7"	8 3/4"	0.317	4360	3250		
Production	5 1/2"	8 3/4"	0.361	12360	9500		1.20/50% Excess
Tubing	2 3/8"	4.778"	0.190	Approx 8193'	Approx 8193'	Class A	1.20/50% Excess
Liners				7.00107.0100	Approx 6 193		

PACKERS


Kind:	10K Arrowset AS-1X	
Sizes:	5 1/2"	
Depths Set:		

Page 2 of 3

RECEIVED Office of Cil and Gas

FEB 1 6 2018

WV Department of Environmental Protection

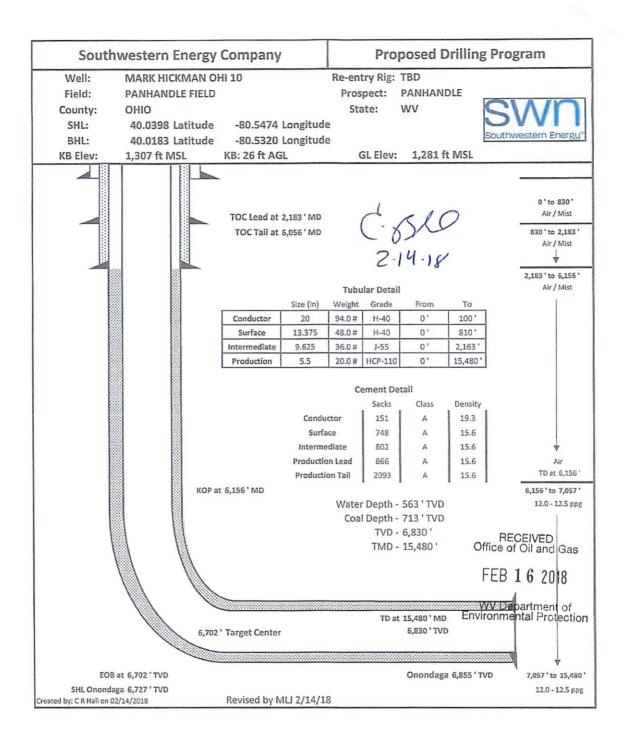





SWN Production Company, LLC

179 Innovation Drive Jane Lew, WV 26378 Tel: 304 884 1610 Fax: 304 471 2497 www.swn.com

February 15, 2018

Ms. Laura Adkins Office of Oil & Gas 601 57th Street Charleston, WV 25304 Office of Oil and Gas

FEB 16 2018

WV Departmer. Environmental Protection

RE: Proposed Modification: Mark Hickman OHI 6H & Mark Hickman OHI 10H

Dear Ms. Adkins

Enclosed please find an updated 6B & WBD for the above captioned wells. We have changed the surface casing. These wells are situated on the Hickman's property, in Triadelphia District, Ohio County, West Virginia.

If you have any questions or desire additional information, please me at 304-884-1614

Thank you.

Sincerely,

Dee Southall

Senior Regulatory Analyst

Southwestern Energy Production Company, LLC

R2 wV+°