

WR-38
DATE: 12/26/01

API # 47-085-04144

STATE OF WEST VIRGINIA
DIVISION OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: Wright, Othel Operator Well No.: 9318

LOCATION: Elevation: 953.99 Quadrangle: Burnt House WV 7.5'
District: Union County: Ritchie
Latitude: 12900 Feet South of 39 Deg. 05 Min. 00 Sec.
Longitude: 3200 Feet West of 80 Deg. 55 Min. 00 Sec.

Well Type: OIL _____ GAS X

Company: Dominion Transmission
445 West Main Street
Clarksburg, WV 26301

Coal Operator No Operations
or Owner _____
Coal Operator _____
or Owner _____

Agent: James D. Blasingame

Permit Issued Date: 5/24/2001

AFFIDAVIT


STATE OF WEST VIRGINIA,
County of Ritchie ss:

James E. Simons and Fred Gaukel being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well, and Larry Parrish Oil and Gas Inspector representing the Director, say that said work was commenced on the 6th day of August, 2001, and that the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
29 sx. Cl. A cement	2325	2240	1444' of 4 1/2" casing	838' of 4 1/2" casing
38 sx. Cl. A	2240	1700	892.15' of 7" casing	771' of 8 5/8" casing
50 sx. Cl. A	1545	1250'	97' of 8 5/8" casing	1007.85' of 7" casing
65 sx. Cl. A	945	735		100' of 10 3/4" casing
185 sx. Cl. A	630	60		
60 sx. Cl. A	60	Squeeze	Perforated 50-75	
100 sx. Cl. A	50	Surface	100 shots 4 spf	
100# Flo-Cel	50	Surface		
Straw and 25 sx. Cl. A Cmt.				

Description of monument: 2'x 2' plate welded to 2" vent with Well No., API No., and date plugged and filled work of plugging and filling said well was completed on the 23rd day of August, 2001.

And further deponents saith not. Fred Gaukel
James E. Simons

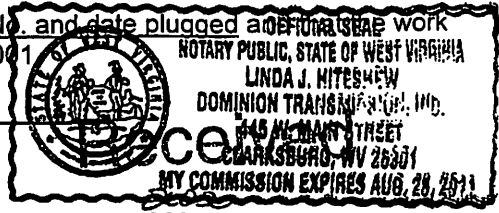

Sworn and subscribed before me this 4th day of February, 2001.
My commission expires: Aug 28, 2011

Linda J. Hiteshew
Notary Public

JUL 2 2013

Office of Oil and Gas
WV Dept. of Environmental Protection

Oil and Gas Inspector: [Signature]