

WR-38
DATE: 12/27/01

API # 47-085-04172P

STATE OF WEST VIRGINIA
DIVISION OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: Maxwell, Martin James Operator Well No.: 9736

LOCATION: Elevation: 1118.32 Quadrangle: Burnt House WV 7.5'
District: Union County: Ritchie
Latitude: 11850 Feet South of 39 Deg. 05 Min. 00 Sec.
Longitude: 7100 Feet West of 80 Deg. 55 Min. 00 Sec.

Well Type: OIL _____ GAS X

Company: Dominion Transmission
445 West Main Street
Clarksburg, WV 26301

Coal Operator No Operations
or Owner _____
Coal Operator _____
or Owner _____

Agent: James D. Blasingame

Permit Issued Date: 5/24/2001

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of Ritchie ss:

James E. Simons and Fred Gaukel being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well, and Larry Parrish Oil and Gas Inspector representing the Director, say that said work was commenced on the 19th day of July, 2001, and that the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
30 sx. Cl. A with 1% CFR2	Below retainer	@ 2380'	1200' of 3 1/2" tubing	302' of 10 3/4" casing
18 sx. Cl. A with 1% CFR2	2380	2000	1200' of 5 1/2" casing	1115' of 8 5/8" casing
50 sx. Cl. A	1200	1045	1195.55' of 7" casing	790.45' of 7" casing
112 sx. Class A	1015	606		797' of 5 1/2" casing
113 sx. Class A	606	206		1277' of 3 1/2" tubing
150 sx. Class A	248	0	Perforate 8 5/8" casing at 500 w/ 4 shots and at 275-300 w/ 4 spf	

Description of monument: 2'x 2' plate welded to 2" vent with Well No., API No. and date plugged and that the work of plugging and filling said well was completed on the 6th day of August 2001.


And further deponents saith not.

Fred Gaukel
James Simons

Sworn and subscribed before me this 4th day of February

My commission expires: Aug 28, 2011

Linda J. Hitesrew
Notary Public

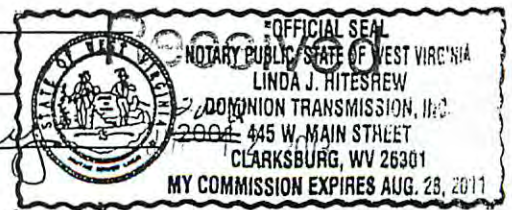

Oil and Gas Inspector: Larry Parrish

Office of Oil and Gas **07/19/2013**
West Virginia Department of Environmental Protection