

#### west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

September 24, 2013

#### WELL WORK PERMIT

#### Horizontal 6A Well

This permit, API Well Number: 47-8510057, issued to ANTERO RESOURCES CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: CHANDOS UNIT 2H

Farm Name: ANNIE B. HAYMOND, ET AL

API Well Number: 47-8510057

Permit Type: Horizontal 6A Well

Date Issued: 09/24/2013

API Number: 85-10057

## PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. <u>Failure to adhere to the specified permit conditions may result in enforcement action.</u>

#### CONDITIONS

- 1. The Office of Oil and Gas has approved your permit application, which includes your addendum. Please be advised that the addendum is part of the terms of the well work permit, and will be enforced as such. The Office of Oil and Gas must receive a copy of all data collected, and submitted in a timely fashion, but no later than the WR35 submittal.
- 2. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 3. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 4. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% (unless soil test results show a greater range of moisture content is appropriate and 95% compaction can still be achieved) of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95% compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 5. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 6. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.

API Number: 85-100 57

## **PERMIT CONDITIONS**

8. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.

9. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.



#### Addendum for Antero pads in Ritchie County, WV

Chandos Unit 2H Eddy Pad

The following outlines the process to be undertaken by Antero Resources prior to and during completion process of wells.

- •Investigate all wells within 1320' of new wells when within the defined Alexander to Marcellus <1500' window and all Marcellus vertical wells
  - contact operator of all wells
  - confirm well status, producing horizon, well completion/stimulation information
  - discuss plans to stimulate the horizontal Marcellus wells and the plans for monitoring Potential impact on shallow wells
  - make sure all vertical Marcellus to Alexander wells have adequate wellhead equipment,
     Including pressure gauges
  - provide shallow well operator with frac dates and monitor during stimulation
  - if well waters out during frac, shut it in until after stimulations, and install adequate well
     Control equipment prior to swabbing in the impacted shallow well
- Control fracturing parameters during job to limit fracture height growth
  - limit rate and limit pressures for each segment of fracturing stages
- •Tracers demonstrate that we rarely reach offset wells at 660' offset
  - -will use tracers at each lateral

RECEIVED Office of Oil and Gas

AUG 2 2013

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

		WELL	WORK PE	KMIT APPLICA	110N 86	V.	539
1) Well Operator:	Antero Re	esources C	orporation	494488557	085- Ritchie	Clay	Pennsboro 7.5
r) wen operator.				Operator ID	County	District	Quadrangle
2) Operator's Well	Number:	Chandos Unit	2H		Well Pad Nam	e: Existing Eddy	Pad
3 Elevation, curren	t ground:	971'	Ele	vation, proposed	post-construc	tion:	971'
4) Well Type: (a) C	Gas		Oil	Undergroun	d Storage		
	Other						
(b) I		hallow	-	Deep			
5) Evicting Dod9 Vo		lorizontal Yes		<del></del>			
5) Existing Pad? Ye				All and a second second	49 (4.12		
6) Proposed Target  Marcellus Shale: 6200' TV					d Associated	Pressure(s):	
7) Proposed Total V	ertical De	oth: 620	00' TVD				
8) Formation at Tot	al Vertical	Depth:	Marcellus Shale				
9) Proposed Total M	Measured D	epth:	14,500' MD				
10) Approximate Fr	esh Water	Strata Dept	hs: 13	7'			
11) Method to Dete	rmine Fres	h Water Dej	pth: Ar	nna Unit 3H (API# 47-085-	10015)		
12) Approximate Sa	altwater De	pths:	1536'				
13) Approximate Co	oal Seam D	Depths:	611', 643'				/
14) Approximate De	epth to Pos	sible Void (	coal mine,	karst, other):	None antic	ipated V	/
15) Does proposed adjacent to an ad				irectly overlying and depth of mine:	or No		
16) Describe propos	sed well wo	ork: Drill	l, perforate, fractu	re a new horizontal shallo	w well and complete	Marcellus Shale	
	kwater into the M	arcellus Shale for	mation in order to	ready the well for production			
water and sand, with less	than 1 percent sp	ecial-purpose add	itives as shown in	the attached "List of Anticip	pated Additives Used	for Fracturing or Stir	nulating Well."
<del></del>							
18) Total area to be			and the second second		(acres):	11.1 acres	
19) Area to be distu	rbed for w	ell pad only	, les <b>Offices</b>	road (acres):	6.6 acres		D 4 - 1 6
				NUG 2 2013	0	Julia.	Page 1 of 3
			WV	Department o mental Protec	of Har	1-13	9/27/2013

#### 20)

#### CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	305'	305'	CTS, 424 Cu. Ft.
Coal	9-5/8"	New	J-55	36#	2525'	2525'	CTS, 1028 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	14500'	14500'	3540 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		6800'	
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

#### **PACKERS**

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	

RECEIVED
Office of Oil and Gas

AUG 2 2013

Page 2 of 3



21) Describe centralizer placement for each casing string.

Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th joint spaced up the hole to surface.

Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th collar to surface.

Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casing.

22) Describe all cement additives associated with each cement type.

Conductor: no additives, Class A cement.

Surface: Class A cement with 2% calcium and 1/4 lb flake, 5 gallons of clay treat

Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of clay treat

Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51

Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20

23) Proposed borehole conditioning procedures.

Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.

Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate 40 bbls brine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to base of curve, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

\*Note: Attach additional sheets as needed.

RECEIVED
Office of Oil and Gas

AUG 2 2013

WV Department of Environmental Protection

Page 3 of 3

09/27/2013

	Page	of	
API Number 47 - 085	-	10057	
Operator's Well	No. Char	ndos Unit 2H	

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

85-0010057

#### FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator NameAntero Resou	rces Corporation	OP Code	494488557	<del></del>
Watershed (HUC 10) North F	ork Hughes River	_ Quadrangle _ Pennsboro	7.5'	
Elevation 971'	County_Ritchie	Distric	Clay Clay	-
Will a pit be used for drill cutt If so, please describe	anticipated pit waste: Drilling and F	(*An associated frac Flowback Fluids	pit will be used for flowb	
	be used in the pit? Yes X N	lo If so, what m	1.? 60 mil	
Lar Un Rer Off	tethod For Treated Pit Wastes: ad Application derground Injection ( UIC Permit Notes ( at API Number Future permitted well of Site Disposal ( Meadowfill Landfill Peter ( Explain)	locations when applicable. API# wi		
Will closed loop system be us	ed? Yes			
Drilling medium anticipated for	or this well? Air, freshwater, oil base	ed, etc. Surface - Air/Freshwater, Inter	mediate - Dust/Stiff Foam, Production - Water	Based Mud
	pe? Synthetic, petroleum, etc. N/A			
	g medium? Please See Attachment			
	? Leave in pit, landfill, removed off	site, etc. Stored in tanks, rem	oved offsite and taken to landfill	
	to solidify what medium will be use			
-Landfill or offsite na	me/permit number? Meadowfill Landfill	(Permit #SWF-1032-98)		
on August 1, 2005, by the Off provisions of the permit are elaw or regulation can lead to elaw or regulation can lead to elaw or regulation form and all atta obtaining the information, I penalties for submitting false Company Official Signature_ Company Official (Typed Na	ty of law that I have personally exchments thereto and that, based of believe that the information is true information, including the possibility me) Gerard G. Alberts	nia Department of Environ by term or condition of the camined and am familiar on my inquiry of those in accurate, and complete.	mental Protection. I under general permit and/or oth with the information submidividuals immediately. I am awar the there at AUG	stand that the ter applicable nitted on this sponsible for as a significant 2 2013
Company Official Title Env	ironmental & Regulatory Manager		Environme	ntal Protectio
Subscribed and sworn before  Wy commission expires	me this 39 day of C		otary PubliSA BOTTINELLI Notary Public State of Colorado Notary ID 201240723 My Commission Expires	<sup>65</sup> <b>27/201</b> 3

# Form WW-9 Additives Attachment85 - 0010057

#### SURFACE INTERVAL

- 1. Fresh Water
- 2. Soap -Foamer AC
- 3. Air

#### INTERMEDIATE INTERVAL

#### STIFF FOAM RECIPE:

- 1) 1 ppb Soda Ash / Sodium Carbonate-Alkalinity Control Agent
- 2) 1 ppb Conqor 404 (11.76 ppg) / Corrosion Inhibitor
- 3) 4 ppb KLA-Gard (9.17 ppg) / Amine Acid Complex-Shale Stabilizer
- 4) 1ppb Mil Pac R / Sodium Carboxymethylcellulose-Filtration Control Agent
- 5) 12 ppb KCL / Potassium Chloride-inorganic Salt
- 6) Fresh Water 80 bbls
- 7) Air

#### PRODUCTION INTERVAL

1. Alpha 1655

Salt Inhibitor

2. Mil-Carb

Calcium Carbonate

3. Cottonseed Hulls

Cellulose-Cottonseed Pellets - LCM

4. Mil-Seal

Vegetable, Cotton & Cellulose-Based Fiber Blend – LCM

5. Clay-Trol

Amine Acid Complex - Shale Stabilizer

6. Xan-Plex

Viscosifier For Water Based Muds

7. Mil-Pac (All Grades)

Sodium Carboxymethylcellulose – Filtration Control Agent

8. New Drill

Anionic Polyacrylamide Copolymer Emulsion - Shale Stabilizer

Caustic Soda

Sodium Hydroxide – Alkalinity Control

10. Mil-Lime

Calcium Hydroxide - Lime

11. LD-9

Polyether Polyol – Drilling Fluid Defoamer

12. Mil Mica

Hydro-Biotite Mica – LCM

RECEIVED
Office of Oil and Gas

AUG 2 2013

13. Escaid 110

Drilling Fluild Solvent - Aliphatic Hydrocarbon

85-0010057

14. Ligco

Highly Oxidized Leonardite - Filteration Control Agent

15. Super Sweep

Polypropylene - Hole Cleaning Agent

16. Sulfatrol K

Drilling Fluid Additive - Sulfonated Asphalt Residuum

17. Sodium Chloride, Anhydrous

Inorganic Salt

18. D-D

Drilling Detergent - Surfactant

19. Terra-Rate

Organic Surfactant Blend

20. W.O. Defoam

Alcohol-Based Defoamer

21. Perma-Lose HT

Fluid Loss Reducer For Water-Based Muds

22. Xan-Plex D

Polysaccharide Polymer - Drilling Fluid Viscosifier

23. Walnut Shells

Ground Cellulosic Material - Ground Walnut Shells - LCM

24. Mil-Graphite

Natural Graphite - LCM

25. Mil Bar

Barite - Weighting Agent

26. X-Cide 102

Biocide

27. Soda Ash

Sodium Carbonate – Alkalinity Control Agent

28. Clay Trol

Amine Acid complex - Shale Stabilizer

29. Sulfatrol

Sulfonated Asphalt – Shale Control Additive

30. Xanvis

Viscosifier For Water-Based Muds

31. Milstarch

Starch - Fluid Loss Reducer For Water Based Muds

32. Mil-Lube

**Drilling Fluid Lubricant** 

RECEIVED
Office of Oil and Gas

AUG 2 2013

# 85-0010057

Operator's Well No. Chandos Unit 2H Form WW-9 Antero Resources Corporation Proposed Revegetation Treatment: Acres Disturbed 11.1 \_\_\_\_\_Tons/acre or to correct to pH 6.5 Hay or straw or Wood Fiber (will be used where needed) Fertilizer (10-20-20 or equivalent) 500 lbs/acre (500 lbs minimum) Mulch 2-3 Tons/acre Existing Access Road(2.6) + Existing Drill Pad (6.6) + Existing Frac Pit (0.7) + Existing E&S (0.3) + Existing Topsoil Stockpile (0.9) = 11.1 Acres Seed Mixtures Area II (Permanent) Area I (Temporary) Seed Type Seed Type lbs/acre lbs/acre 40 40 Fox Tail/Grassy Annual Rye Grass Perennial Rye 30 Crown Vetch 20 \*or type of grass seed requested by surface owner \*or type of grass seed requested by surface owner Attach: Drawing(s) of road, location, pit and proposed area for land application. Photocopied section of involved 7.5' topographic sheet. Plan Approved by

Field Reviewed?

AUG 2 2013

Office of Oil and Gas

# west virginia department of environmental protection



# Water Management Plan: Primary Water Sources



WMP-01450

API/ID Number:

047-085-10057

Operator:

Antero Resources

Chandos Unit 2H

#### Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

" APPROVED SEP 2 3 2013

#### **Source Summary**

WMP-01450

API Number:

047-085-10057

Operator:

**Antero Resources** 

Chandos Unit 2H

Stream/River

Ohio River @ Ben's Run Withdrawal Site Source

Tyler

Owner:

**Ben's Run Land Company** 

**Limited Partnership** 

Start Date

**End Date** 

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/13/2014 11/13/2015

8,540,000

39.46593

-81.110781

✓ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID: 9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

3,360

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

**DEP Comments:** 

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

West Fork River @ JCP Withdrawal Source

Harrison

Owner:

**James & Brenda Raines** 

Start Date

**End Date** 

Total Volume (gal)

Max. daily purchase (gal)

39.320913

Intake Latitude: Intake Longitude: -80.337572

11/13/2014

11/13/2015

8,540,000

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

2,000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

146.25

**DEP Comments:** 

Source West Fork River @ McDonald Withdrawal Harrison

Owner:

**David Shrieves** 

Start Date

**End Date** 

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/13/2014

11/13/2015

8,540,000

39.16761

-80.45069

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

3,000

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

106.30

Source	West Fork Rive	r @ GAL Withdraw	al		Harrison	Owner:	<b>David Shrieves</b>
Start Date <b>11/13/2014</b>	End Date 11/13/2015		/olume (gal) 6 <b>40,000</b>	Max. daily pu	rchase (gal)	Intake Latitude: <b>39.16422</b>	Intake Longitude: -80.45173
<b>☑</b> Regulated	Stream? Stone	ewall Jackson Dam	Ref. Gauge ID	3061000	ı	WEST FORK RIVER AT ENTE	RPRISE, WV
Max. Pump	rate (gpm):	<b>2,000</b> Min	. Gauge Readi	ing (cfs):	175.00	Min. Passby (cf	(s) <b>106.30</b>
	DEP Commer	nts:					
Source	Middle Island O	Creek @ Mees With	ndrawal Site		Pleasants	Owner:	Sarah E. Mees
Start Date 11/13/2014	End Date 11/13/2015		/olume (gal) 4 <b>0,000</b>	Max. daily pu	rchase (gal)	Intake Latitude: <b>39.43113</b>	Intake Longitude: -81.079567
		5,5	10,000			33.43113	01.073307
☐ Regulated	Stream?		Ref. Gauge ID	3114500	ı	MIDDLE ISLAND CREEK AT	LITTLE, WV
☐ Regulated		<b>3,360</b> Min.	Ref. Gauge ID . <b>Gauge Readi</b>		52.59	MIDDLE ISLAND CREEK AT  Min. Passby (cf	
_		·	_				
_	rate (gpm):	·	_				
_	rate (gpm):	·	_				
_	rate (gpm): DEP Commer	·	. Gauge Readi			Min. Passby (cf	
Max. Pump	rate (gpm):  DEP Commer  Middle Island C	creek @ Dawson W Total V	. Gauge Readi ithdrawal /olume (gal)		<b>52.59</b> Tyler	Min. Passby (cf  Owner: Ga  Intake Latitude:	ary D. and Rella A. Dawson Intake Longitude:
Max. Pump	rate (gpm):  DEP Commer  Middle Island C	creek @ Dawson W Total V	. Gauge Readi	ing (cfs):	<b>52.59</b> Tyler	Min. Passby (cf	ary D. and Rella A. Dawson
Max. Pump	rate (gpm):  DEP Commen  Middle Island C  End Date  11/13/2015	creek @ Dawson W Total V	. Gauge Readi ithdrawal /olume (gal)	ing (cfs): Max. daily pur	<b>52.59</b> Tyler  Tchase (gal)	Min. Passby (cf  Owner: Ga  Intake Latitude:	ary D. and Rella A. Dawson Intake Longitude: -80.867803
Max. Pump	rate (gpm):  DEP Commen  Middle Island C  End Date  11/13/2015  Stream?	creek @ Dawson W Total v 8,5	Gauge Readi ithdrawal olume (gal) 40,000	ing (cfs):  Max. daily pure:	<b>52.59</b> Tyler  Tchase (gal)	Min. Passby (cf  Owner: Ga  Intake Latitude:  39.379292	ary D. and Rella A. Dawson Intake Longitude: -80.867803 LITTLE, WV

0	Source	McElroy Creek	@ Forest \	<b>Withdrawal</b>		Tyler	Owner:	Forest C. & Brenda L. Moore
	Start Date 11/13/2014	End Date 11/13/2015		Total Volume (gal) <b>8,540,000</b>	Max. daily	purchase (gal)	Intake Latitud <b>39.39675</b>	de: Intake Longitude: -80.738197
	☐ Regulated	Stream?		Ref. Gauge I	D: <b>3114</b>	500	MIDDLE ISLAND CREEK	AT LITTLE, WV
	Max. Pump r	rate (gpm):	1,000	Min. Gauge Read	ding (cfs):	74.77	Min. Passby	(cfs) 13.10
		DEP Commer	nts:					
ø	Source	Meathouse Fo	rk @ Gagne	on Withdrawal		Doddridge	Owner: <b>(</b>	George L. Gagnon and Susan C. Gagnon
	Start Date 11/13/2014	End Date 11/13/2015		Total Volume (gal) <b>8,540,000</b>	Max. daily	purchase (gal)	Intake Latitud <b>39.26054</b>	le: Intake Longitude:
	☐ Regulated	Stream?		Ref. Gauge I	D: <b>3114</b>	500	MIDDLE ISLAND CREEK	AT LITTLE, WV
	Max. Pump r	rate (gpm):	1,000	Min. Gauge Read	ding (cfs):	71.96	Min. Passby	(cfs) 11.74
		DEP Commer	nts:					
Ø	Source	Meathouse For	·k @ White	ehair Withdrawal		Doddridge	Owner:	Elton Whitehair
	Start Date 11/13/2014	End Date 11/13/2015		Total Volume (gal) <b>8,540,000</b>	Max. daily	purchase (gal)	Intake Latitud <b>39.211317</b>	_
	☐ Regulated	Stream?		Ref. Gauge I	D: <b>3114</b>	500	MIDDLE ISLAND CREEK	AT LITTLE, WV
	Max. Pump r	ate (gpm):	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. Passby	(cfs) <b>7.28</b>

09/27/2013

0	Source	Tom's Fork @ E	rwin With	drawal		Doddridge	Owner:	John F. Erv	win and Sandra E. Erwin
	Start Date 11/13/2014	End Date <b>11/13/2015</b>		Total Volume (gal) <b>8,540,000</b>	Max. daily	purchase (gal)		Latitude: <b>174306</b>	Intake Longitude: -80.702992
	☐ Regulated	Stream?		Ref. Gauge I	D: <b>3114</b> !	500	MIDDLE ISLAND	CREEK AT	LITTLE, WV
	Max. Pump i	ate (gpm):	1,000	Min. Gauge Reac	ling (cfs):	69.73	Min. F	Passby (cfs	s) 0.59
		DEP Commer	its:						
0	Source	Arnold Creek @	Davis Wit	hdrawal		Doddridge	Owner:		Jonathon Davis
	Start Date 11/13/2014	End Date 11/13/2015		Total Volume (gal) <b>8,540,000</b>	Max. daily	purchase (gal)		Latitude: <b>302006</b>	Intake Longitude: -80.824561
	☐ Regulated	Stream?		Ref. Gauge I	D: <b>3114</b> 5	500	MIDDLE ISLAND	CREEK AT I	LITTLE, WV
	Max. Pump r	ate (gpm):	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. F	Passby (cfs	3.08
		DEP Commen	ts:						
Ø	Source	Buckeye Creek	@ Powell \	Vithdrawal		Doddridge	Owner:		Dennis Powell
	Start Date 11/13/2014	End Date <b>11/13/2015</b>		Total Volume (gal) <b>8,540,000</b>	Max. daily	purchase (gal)		Latitude: <b>277142</b>	Intake Longitude: -80.690386
	☐ Regulated	Stream?		Ref. Gauge II	D: <b>3114</b> 5	500	MIDDLE ISLAND	CREEK AT L	.ITTLE, WV
	Max. Pump r	ate (gpm):	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. P	Passby (cfs	4.59

Source	South Fork of H	ughes River @ H	Knight Withdrawa	I	Ritchie	Owner:	Tracy C. Knight & Stephanie C. Knight
Start Date <b>11/13/2014</b>	End Date <b>11/13/2015</b>		al Volume (gal) <b>8,540,000</b>	Max. daily purc	hase (gal)	Intake Latitud <b>39.19836</b>	· ·
☐ Regulated	Stream?		Ref. Gauge ID	3155220	OUTH FO	RK HUGHES RIVER B	ELOW MACFARLAN, W\
Max. Pump i	rate (gpm):	<b>3,000</b> M	lin. Gauge Readi	ng (cfs):	39.80	Min. Passby	(cfs) <b>1.95</b>
	DEP Commen	ts:					
Source	North Fork of H	ughes River @ [	Davis Withdrawal		Ritchie	Owner: <b>Lew</b>	is P. Davis and Norma J. Davis
Start Date 11/13/2014	End Date <b>11/13/2015</b>		al Volume (gal) <b>8,540,000</b>	Max. daily purc	hase (gal)	Intake Latitud <b>39.32236</b>	9
☐ Regulated	Stream?		Ref. Gauge ID	: 3155220	OUTH FO	RK HUGHES RIVER B	ELOW MACFARLAN, W\
Max. Pump r	ate (gpm):	<b>1,000</b> M	lin. Gauge Readi	ng (cfs):	35.23	Min. Passby	(cfs) <b>2.19</b>

#### Source Summary

WMP-01450

API Number:

047-085-10057

Operator:

Antero Resources

Chandos Unit 2H

#### **Purchased Water**

Ohio River @ Select Energy Source

Pleasants

Owner:

Select Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/13/2014

11/13/2015

8.540.000

500,000

39.346473

-81.338727

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

1.680

Min. Gauge Reading (cfs):

7.216.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Middle Island Creek @ Solo Construction

Pleasants

Owner:

Solo Construction, LLC

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/13/2014

11/13/2015

8,540,000

1,000,000

39.399094

-81.185548

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

6.468.00

Min. Passby (cfs)

**DEP Comments:** 

Elevation analysis indicates that this location has the same elevation as Middle Island Creek's pour point into the Ohio River. As such, it is deemed that water flow at this

location is heavily influenced by the Ohio River.

Source

Claywood Park PSD

Wood

Owner:

Claywood Park PSD

Start Date

✓ Regulated Stream?

End Date

Total Volume (gal) 8,540,000

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/13/2014

11/13/2015

Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

7,216.00

Min. Passby (cfs)

**DEP Comments:** 

Elevation analysis indicates that this location has approximately the same elevation as Little Kanawha's pour point into the Ohio River. As such, it is deemed that water flow

at this location is heavily influenced by the Ohio River.

**Sun Valley Public Service District** Harrison Owner: **Sun Valley PSD** Source

Start Date

**End Date** 

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/13/2014

11/13/2015

8,540,000

200,000

Max. Pump rate (gpm):

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Min. Gauge Reading (cfs):

171.48


Min. Passby (cfs)

**DEP Comments:** 

**☑** Regulated Stream? **Stonewall Jackson Dam** Ref. Gauge ID:

WMP-01450 API/ID Number: 047-085-10057 Operator: Antero Resources Chandos Unit 2H Ohio River @ Select Energy Source ID: 24572 Source Name Source Latitude: 39.346473 Select Energy Source Longitude: -81.338727 5030201 HUC-8 Code: Anticipated withdrawal start date: 11/13/2014 Pleasants 25000 Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 11/13/2015 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 8,540,000 Trout Stream? Tier 3? 1,680 Ohio River Min. Flow Max. Pump rate (gpm): Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Gauged Stream? Max. Truck pump rate (gpm) Reference Gaug 9999998 Ohio River Station: Racine Dam 25,000.00 Drainage Area (sq. mi.) Gauge Threshold (cfs): 7216


Month	Median monthly flow (cfs)	Threshold (+ pump	Available water (cfs)	
1	50,956.00		4	
2	54,858.00	(4)	12	
3	73,256.00	141	9	
4	62,552.00			
5	43,151.00		1.45	
6	27,095.00	-	-	
7	17,840.00	-	3.0	
8	14,941.00		9	
9	14,272.00	9	1141	
10	17,283.00			
11	29,325.00		1191	
12	46,050.00	55.	4	

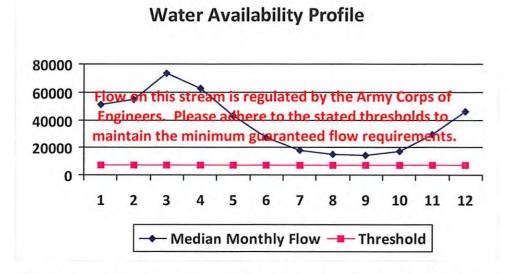


Min. Gauge Reading (cfs): Passby at Location (cfs):	
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	3.74
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	

API/ID Number: WMP-01450 047-085-10057 Operator: Antero Resources Chandos Unit 2H Middle Island Creek @ Solo Construction Source ID: 24573 Source Latitude: 39.399094 Source Name Solo Construction, LLC Source Longitude: -81.185548 5030201 HUC-8 Code: Anticipated withdrawal start date: 11/13/2014 25000 Pleasants Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 11/13/2015 **Endangered Species?** ✓ Mussel Stream? 8,540,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? City of St. Marys Max. Truck pump rate (gpm) Gauged Stream? Ohio River Station: Willow Island Lock & Dam Reference Gaug 9999999 25,000.00 6468 Drainage Area (sq. mi.) Gauge Threshold (cfs):


Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	45,700.00	1.0	
2	49,200.00	4	
3	65,700.00		
4	56,100.00		12
5	38,700.00	-	2
6	24,300.00	-	4
7	16,000.00	-	2
8	13,400.00		4
9	12,800.00	-	2
10	15,500.00		1.5
11	26,300.00	(4)	17
12	41,300.00	-	4

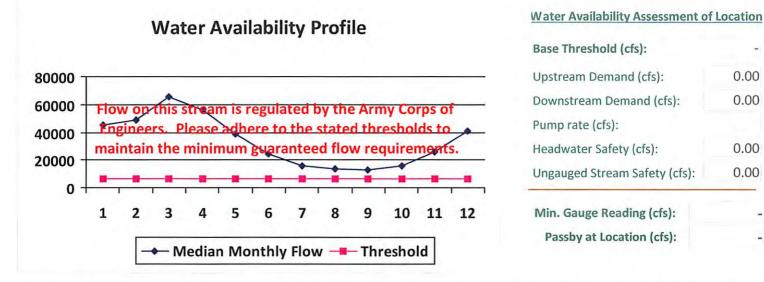

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

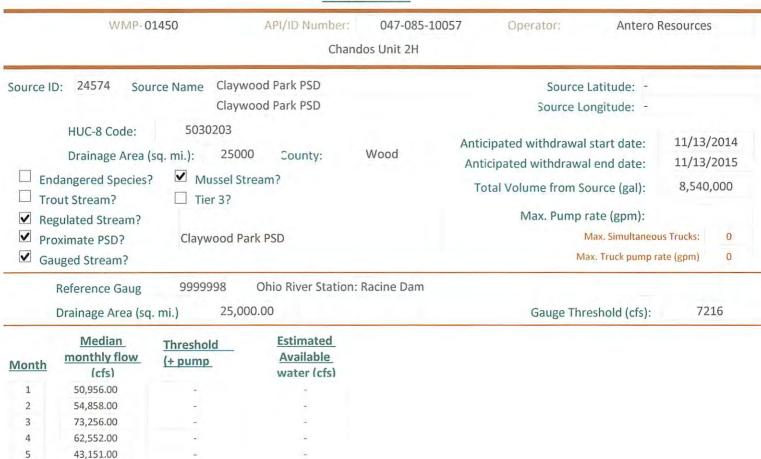

## **Water Availability Profile**

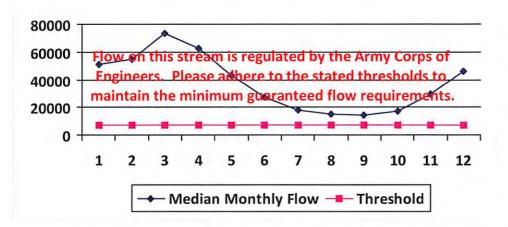

Mater	Availability	Accocement	of I	ocation

Base Threshold (cfs):	- 1
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	104

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

6

7

8

9

10

11 12 27,095.00

17,840.00

14,941.00

14,272.00

17,283.00 29,325.00

46,050.00

Source Detail WMP-01450 API/ID Number: 047-085-10057 Operator: Antero Resources Chandos Unit 2H Sun Valley Public Service District Source ID: 24575 Source Name Source Latitude: -Sun Valley PSD Source Longitude: -HUC-8 Code: 5020002 Anticipated withdrawal start date: 11/13/2014 391.85 Harrison Drainage Area (sq. mi.): County: 11/13/2015 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 8,540,000 Total Volume from Source (gal): Trout Stream? Tier 3? Max. Pump rate (gpm): Stonewall Jackson Dam Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 3061000 WEST FORK RIVER AT ENTERPRISE, WV Reference Gaug 759.00 234 Drainage Area (sq. mi.) Gauge Threshold (cfs): Median Estimated **Threshold** monthly flow Available (+ pump Month (cfs) water (cfs) 1,200.75 1 2 1,351.92 3 1,741.33 4 995.89 5 1,022.23 6 512.21 7 331.86 8 316.87 9 220.48 10 216.17 11 542.45 12 926.12 Water Availability Assessment of Location **Water Availability Profile** Base Threshold (cfs): 2000 Upstream Demand (cfs): Downstream Demand (cfs): 1500 stream is regulated by the Army Corps of

## "Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

12

9

Pump rate (cfs):

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

maintain the minimum

5

6

Median Monthly Flow — Threshold

1000

500

0

1


2

0.00

0.00

API/ID Number: 047-085-10057 WMP-01450 Operator: Antero Resources Chandos Unit 2H Ohio River @ Ben's Run Withdrawal Site Source ID: 24558 Source Name Source Latitude: 39.46593 Ben's Run Land Company Limited Partnership Source Longitude: -81.110781 5030201 HUC-8 Code: Anticipated withdrawal start date: 11/13/2014 25000 Tyler Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 11/13/2015 **Endangered Species?** ✓ Mussel Stream? 8,540,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 3,360 Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 9999999 Ohio River Station: Willow Island Lock & Dam Reference Gaug 25,000.00 6468 Drainage Area (sq. mi.) Gauge Threshold (cfs):


Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Estimated</u> <u>Available</u> water (cfs)
1	45,700.00	1.4	-
2	49,200.00	121	-
3	65,700.00		
4	56,100.00	121	*
5	38,700.00	Y	4
6	24,300.00		3.7
7	16,000.00		
8	13,400.00		-
9	12,800.00		
10	15,500.00	(*)	-
11	26,300.00	(4.)	4
12	41,300.00		7.

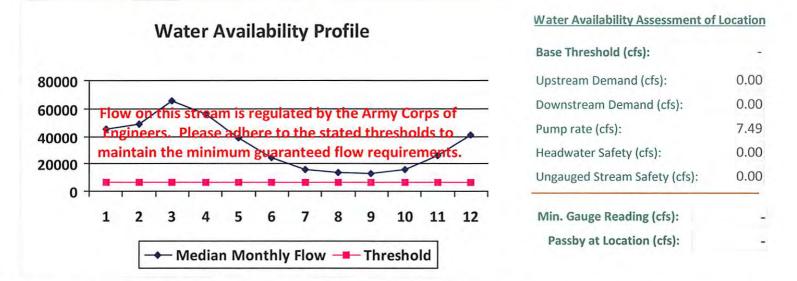

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01450	API/ID Number:	047-085-10057	Operator:	Antero R	esources	
	Chand	os Unit 2H				
ource ID: 24559 Source Name Wes	st Fork River @ JCP With	ndrawal	Source L	atitude: 39.	320913	
Jam	es & Brenda Raines		Source Lor	ngitude: -80	.337572	
☐ Endangered Species? ✓ Mussel ☐ Trout Stream? ☐ Tier 3?	Stream?	larrison Ar	ticipated withdrawal s nticipated withdrawal Total Volume from So	end date: urce (gal):	11/13/2 11/13/2 8,540,0	2015
<ul><li>✓ Regulated Stream? Stonewall</li><li>☐ Proximate PSD?</li><li>✓ Gauged Stream?</li></ul>	Jackson Dam			ax. Simultaneou x. Truck pump ra	s Trucks:	0
Reference Gaug 3061000	WEST FORK RIVER A	AT ENTERPRISE, WV	1.00			
Drainage Area (sq. mi.) 7.	59.00		Gauge Thre	shold (cfs):	23	4


Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	1,630.82	14	
2	1,836.14	La V	1
3	2,365.03		-
4	1,352.59	-	<u>.</u>
5	1,388.37	-2	
6	695.67		
7	450.73	1.2	1.0
8	430.37		-2.
9	299.45	3	
10	293.59		
11	736.74	4	19.1
12	1,257.84	4	-

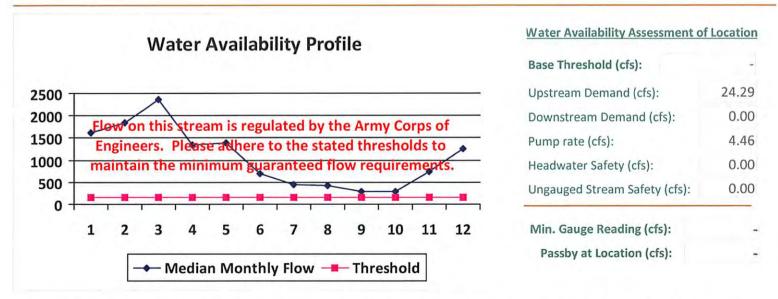

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01450	API/ID Number:	047-085-1005	Operator: Antero	Resources
	Chand	os Unit 2H		
ource ID: 24560 Source Name	West Fork River @ McDona David Shrieves	ld Withdrawal	ourse gamage.	0.16761 0.45069
Drainage Area (sq. mi.):  ☐ Endangered Species?  ✓ M ☐ Trout Stream?  ☐ Tie	0002 314.91 County: F ussel Stream? er 3? ewall Jackson Dam	Harrison	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneo	11/13/2014 11/13/2015 8,540,000 3,000 ous Trucks: 0
✓ Gauged Stream?			Max. Truck pump	rate (gpm) 0
Reference Gaug 3061	000 WEST FORK RIVER A	AT ENTERPRISE, V	NV	
Drainage Area (sq. mi.)	759.00		Gauge Threshold (cfs):	234
Median Thresho	A ! la la la			


Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	964.98		
2	1,086.47	4	
3	1,399.42		1.0
4	800.34	-	
5	821.52	. e.	1.0
6	411.64	40	-
7	266.70	+	- 2
8	254.66	-	1 6.
9	177.19	*	
10	173.72	(4)	
11	435.94	2	-
12	744.28	- 2	

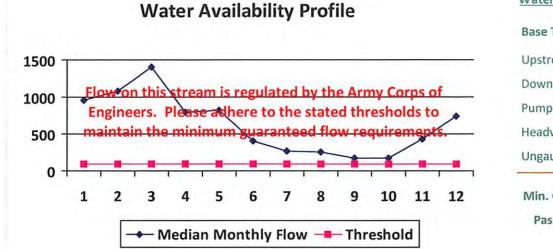

Base Threshold (cfs):	-
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	6.68
Headwater Safety (cfs):	24.27
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

WMP-01450	API/ID Number:	047-085-10057	Operator:	Antero Resour	ces
	Chande	os Unit 2H			
ource ID: 24561 Source Name	West Fork River @ GAL Wit	hdrawal	Source L	atitude: 39.16422	
	David Shrieves		Source Lo	ngitude: -80.45173	
☐ Endangered Species? ☑ Mus ☐ Trout Stream? ☐ Tier	313.67 County: First Stream?	larrison Ant		end date: 11/3 urce (gal): 8,5	
Reference Gaug 306100	00 WEST FORK RIVER A	AT ENTERPRISE, WV		4	
Drainage Area (sq. mi.)	759.00		Gauge Thre	shold (cfs):	234


Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	961.18	1.61	
2	1,082.19	- 2	1
3	1,393.91	1.0	
4	797.19	V	
5	818.28	1.00	9
6	410.02		
7	265.65		4
8	253.65	340	0.02
9	176.49		2
10	173.04		
11	434.22	141	4
12	741.35	4	4

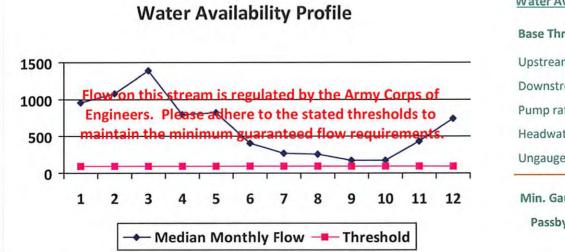

Base Threshold (cfs):	- 2
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	24.18
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

WMP-01450	API/ID Number:	047-085-10057	Operator:	Antero Reso	urces
	Chand	os Unit 2H			
ource ID: 24562 Source Name	Middle Island Creek @ Mee	es Withdrawal Site	Source La	titude: 39.431	13
	Sarah E. Mees		Source Long	gitude: -81.079	9567
HUC-8 Code: 5030  Drainage Area (sq. mi.):		leasants	nticipated withdrawal st		1/13/2014
✓ Endangered Species? ✓ Mu	ssel Stream?	A	Anticipated withdrawal e Total Volume from Sou		1/13/2015 8,540,000
☐ Trout Stream? ☐ Tie Regulated Stream?	r 3?		Max. Pump rat	e (gpm):	3,360
Proximate PSD?				c. Simultaneous Tru	
✓ Gauged Stream?			Max.	Truck pump rate (g	(pm) 0
Reference Gaug 31145	00 MIDDLE ISLAND CR	EEK AT LITTLE, WV			
Drainage Area (sq. mi.)	458.00		Gauge Thresh	nold (cfs):	45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	519.88	55.12	465.14
2	653.95	55.12	599.22
3	731.75	55.12	677.01
4	543.38	55.12	488.65
5	286.64	55.12	231.90
6	100.10	55.12	45.36
7	56.65	55.12	1.91
8	46.64	55.12	-8.10
9	23.89	55.12	-30.85
10	30.01	55.12	-24.72
11	146.56	55.12	91.83
12	358.10	55.12	303.37

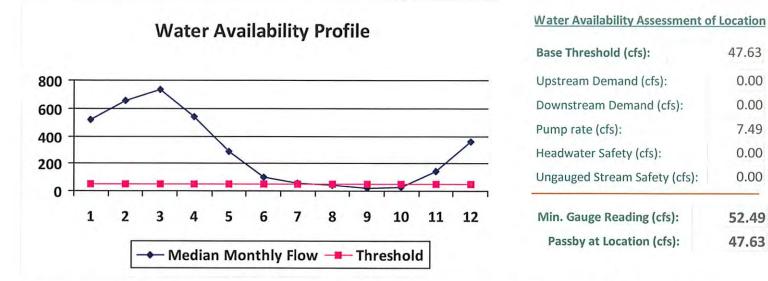

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

0.00 0.00


7.49

0.00

0.00

WMP-0:	1450	API/ID Number:	047-085-10057	7 Operator:	Antero I	Resources
		Chand	los Unit 2H			
ource ID: 24563 Sour	rce Name M	iddle Island Creek @ Daw	vson Withdrawal	Source L	atitude: 39.	379292
	Ga	ary D. and Rella A. Dawso	n	Source Lor	ngitude: -80	.867803
HUC-8 Code:  Drainage Area (s  ✓ Endangered Species?  Trout Stream?  Regulated Stream?  Proximate PSD?		31.34 County:	Tyler		end date: urce (gal): ate (gpm): lax. Simultaneou	
✓ Gauged Stream?				Max	x. Truck pump ra	ate (gpm) 0
Reference Gaug	3114500	MIDDLE ISLAND CR	EEK AT LITTLE, W\	/		
Drainage Area (sq.	mi.)	458.00		Gauge Thre	shold (cfs):	45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	194.47	42.06	152.68
2	244.62	42.06	202.83
3	273.72	42.06	231.93
4	203.26	42.06	161.47
5	107.22	42.06	65.43
6	37.44	42.06	-4.35
7	21.19	42.06	-20.60
8	17.45	42.06	-24.34
9	8.94	42.06	-32.85
10	11.23	42.06	-30.56
11	54.82	42.06	13.04
12	133.96	42.06	92.17

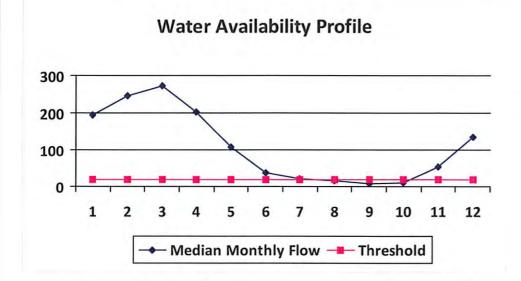

6.55 6.68 4.45 0.00
6.68
6.55
3.5 00.00
13.10
17.82


WMP-01450 API/ID Number: 047-085-10057 Operator: Antero Resources Chandos Unit 2H McElroy Creek @ Forest Withdrawal Source ID: 24564 Source Latitude: 39.39675 Source Name Forest C. & Brenda L. Moore Source Longitude: -80.738197 HUC-8 Code: 5030201 Anticipated withdrawal start date: 11/13/2014 Drainage Area (sq. mi.): 88.85 Tyler County: Anticipated withdrawal end date: 11/13/2015 **Endangered Species?** ☐ Mussel Stream? 8,540,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,000 Max. Pump rate (gpm): Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Gauged Stream? Max. Truck pump rate (gpm) 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	95.28	19.78	75.68
2	119.86	19.78	100.25
3	134.11	19.78	114.51
4	99.59	19.78	79.99
5	52.54	19.78	32.93
6	18.35	19.78	-1.26
7	10.38	19.78	-9.22
8	8.55	19.78	-11.05
9	4.38	19.78	-15.23
10	5.50	19.78	-14.10
11	26.86	19.78	7.26
12	65.63	19.78	46.03

Drainage Area (sq. mi.)

### **Water Availability Profile**

458.00

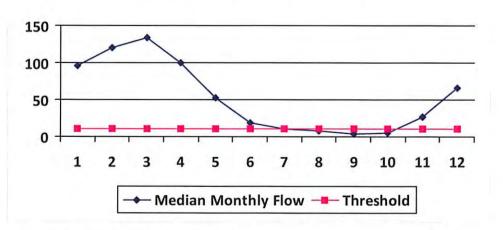

#### Water Availability Assessment of Location


Gauge Threshold (cfs):

45

Min. Gauge Reading (cfs): Passby at Location (cfs):	74.19 13.09
Ungauged Stream Safety (cfs):	2.18
Headwater Safety (cfs):	2.18
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	4.46
Base Threshold (cfs):	8.73

WMP-01450 API/ID Number: 047-085-10057 Operator: Antero Resources Chandos Unit 2H Meathouse Fork @ Gagnon Withdrawal 24565 Source Latitude: 39.26054 Source ID: Source Name George L. Gagnon and Susan C. Gagnon Source Longitude: -80.720998 5030201 HUC-8 Code: 11/13/2014 Anticipated withdrawal start date: Doddridge Drainage Area (sq. mi.): 60.6 County: Anticipated withdrawal end date: 11/13/2015 ✓ Endangered Species? ✓ Mussel Stream? 8,540,000 Total Volume from Source (gal): Trout Stream? Tier 3? 1,000 Max. Pump rate (gpm): Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Max. Truck pump rate (gpm) Gauged Stream? Reference Gaug 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV

	- rando rada (ed. mil)			Sauge Thi estiona (ers).	
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)		
1	64.99	13.39	51.70		
2	81.75	13.39	68.46		
3	91.47	13.39	78.19		
4	67.93	13.39	54.64		
5	35.83	13.39	22.55		
6	12.51	13.39	-0.77		
7	7.08	13.39	-6.20		
8	5.83	13.39	-7.45		
9	2.99	13.39	-10.30		
10	3.75	13.39	-9.53		
11	18.32	13.39	5.04		
12	44.76	13.39	31.48		

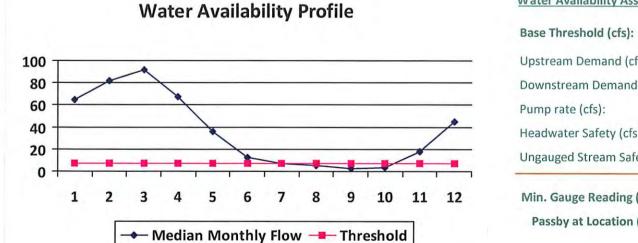

Water Availability Assessment	of Location
Base Threshold (cfs):	5.95
Upstream Demand (cfs):	2.23
Downstream Demand (cfs):	2.81
Pump rate (cfs):	2.23
Headwater Safety (cfs):	1.49
Ungauged Stream Safety (cfs):	1.49
Min. Gauge Reading (cfs):	71.96
Passby at Location (cfs):	11.74

Gauge Threshold (cfs):

45


"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


Drainage Area (sq. mi.)

458.00

	WMP-014	50		API/ID Numbe	047-085-1005	Operator:	Antero	Resources	
				Ch	andos Unit 2H				
ource ID:	24566 Source	e Name	Meathou	se Fork @ Whi	itehair Withdrawal	Source	Latitude: 39.	.211317	
			Elton Wh	itehair		Source Lo	ongitude: -80	0.679592	
Di ✓ Endang  ☐ Trout S	UC-8 Code: rainage Area (sq. gered Species? tream? ted Stream?	✓ Mu	30.37 ussel Stream r 3?	County: m?	Doddridge	Anticipated withdrawal Anticipated withdrawa Total Volume from So	l end date: ource (gal):	11/13/20 11/13/20 8,540,00	15
Proxima	ate PSD? I Stream?					(A	Max. Simultaneou	us Trucks:	0

Month	Median monthly flow (cfs)	Threshold (+ pump	Available water (cfs)
1	32.57	6.70	26.15
2	40.97	6.70	34.55
3	45.84	6.70	39.42
4	34.04	6.70	27.62
5	17.96	6.70	11.54
6	6.27	6.70	-0.15
7	3.55	6.70	-2.87
8	2.92	6.70	-3.50
9	1.50	6.70	-4.92
10	1.88	6.70	-4.54
11	9.18	6.70	2.76
12	22.43	6.70	16.01



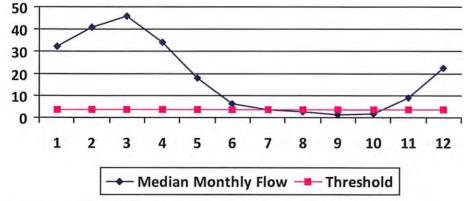


Water Availability Assessment	of Location
Base Threshold (cfs):	2.98
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	2.81
Pump rate (cfs):	2.23
Headwater Safety (cfs):	0.75
Ungauged Stream Safety (cfs):	0.75
Min. Gauge Reading (cfs):	69.73
Passby at Location (cfs):	7.29

WMP-01450	API/ID Number:	047-085-10057	Operator:	Antero	Resources	
	Chando	os Unit 2H				
Source ID: 24567 Source Name	Tom's Fork @ Erwin Withdr	awal	Source Lat	itude: 39	.174306	
	John F. Erwin and Sandra E.	Erwin	Source Long	itude: -80	0.702992	
		oddridge Ar	ticipated withdrawal sta nticipated withdrawal er Total Volume from Sour	nd date:	11/13/2 11/13/2 8,540,0	015
☐ Regulated Stream?			Max. Pump rate	e (gpm):	1,000	)
☐ Proximate PSD? ☐ Gauged Stream?				. Simultaneoi Fruck pump r		0
Reference Gaug 31145  Drainage Area (sq. mi.)	MIDDLE ISLAND CRE	EEK AT LITTLE, WV	Gauge Thresh	nold (cfs):	45	

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	4.30	2.82	1.88
2	5.41	2.82	2.98
3	6.05	2.82	3.63
4	4.49	2.82	2.07
5	2.37	2.82	-0.05
6	0.83	2.82	-1.60
7	0.47	2.82	-1.96
8	0.39	2.82	-2.04
9	0.20	2.82	-2.23
10	0.25	2.82	-2.18
11	1.21	2.82	-1.21
12	2.96	2.82	0.54



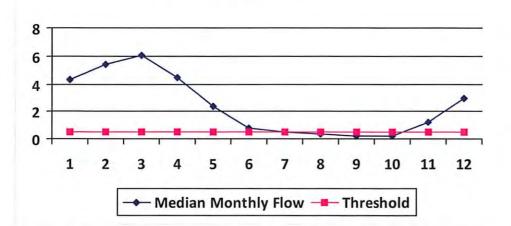


Water	Availability	Assessment	of	Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	69.73 0.59
Ungauged Stream Safety (cfs):	0.10
Headwater Safety (cfs):	0.10
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	0.39

WMP-01450	API/ID Number:	047-085-10057	Operator;	Antero R	esources	
	Chand	os Unit 2H				
Source ID: 24568 Source Name	Arnold Creek @ Davis With	drawal	Source La	atitude: 39.3	802006	
	onathon Davis		Source Lon	gitude: -80.	824561	
HUC-8 Code: 50302 Drainage Area (sq. mi.):		oddridge	Anticipated withdrawal st	tart date:	11/13/2	
☐ Endangered Species? ☑ Mus	sel Stream?		Anticipated withdrawal of Total Volume from Sou		11/13/2 8,540,0	
☐ Trout Stream? ☐ Tier ☐ Regulated Stream?	3?		Max. Pump ra	te (gpm):	1,000	)
Proximate PSD? Gauged Stream?				ax. Simultaneous . Truck pump rat		0
Reference Gaug 311450	0 MIDDLE ISLAND CR	EEK AT LITTLE, WV				
Drainage Area (sq. mi.)	458.00		Gauge Thres	shold (cfs):	45	

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Estimated</u> <u>Available</u> water (cfs)
1	22.34	5.30	17.29
2	28.10	5.30	23.05
3	31.44	5.30	26.39
4	23.35	5.30	18.30
5	12.32	5.30	7.26
6	4.30	5.30	-0.75
7	2.43	5.30	-2.62
8	2.00	5.30	-3.05
9	1.03	5.30	-4.03
10	1.29	5.30	-3.76
11	6.30	5.30	1.25
12	15.39	5.30	10.34

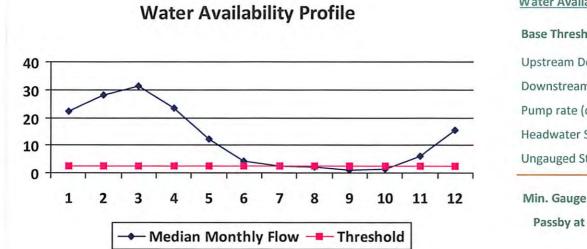

Base Threshold (cfs):  Upstream Demand (cfs):	2.05
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.23
Headwater Safety (cfs):	0.51
Ungauged Stream Safety (cfs):	0.51
Min. Gauge Reading (cfs):	69.73
Passby at Location (cfs):	3.07

WMP-01450	API/ID Number: Chandos	047-085-10057 Unit 2H	Operator: Antero	Resources
	keye Creek @ Powell With	drawal	Jource Editione.	277142
	.15 County: Dodd	dridge Anticip	ated withdrawal start date: pated withdrawal end date: I Volume from Source (gal): Max. Pump rate (gpm):	11/13/2014 11/13/2015 8,540,000 1,000
Proximate PSD? Gauged Stream?			Max. Simultaneou	

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	33.41	6.82	26.95
2	42.02	6.82	35.56
3	47.02	6.82	40.56
4	34.92	6.82	28.46
5	18.42	6.82	11.96
6	6.43	6.82	-0.03
7	3.64	6.82	-2.82
8	3.00	6.82	-3.46
9	1.53	6.82	-4.92
10	1.93	6.82	-4.53
11	9.42	6.82	2.96
12	23.01	6.82	16.55

Drainage Area (sq. mi.)

458.00

#### **Water Availability Profile** 50 40 30 20 10 1 3 5 9 12 2 6 7 8 10 11

Median Monthly Flow — Threshold

Base Threshold (cfs):	3.06
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
	2 22

Water Availability Assessment of Location

Pump rate (cfs): 2.23
Headwater Safety (cfs): 0.77

Ungauged Stream Safety (cfs): 0.77

Min. Gauge Reading (cfs):

Gauge Threshold (cfs):

69.73


45

Passby at Location (cfs):

4.59


WMP-01450	API/ID Number:	047-085-10057	Operator:	Antero Resourc	es
	Chand	los Unit 2H			
Source ID: 24570 Source Name	South Fork of Hughes River	@ Knight Withdra	awal Source Latitu	de: 39.198369	
	Tracy C. Knight & Stephanic	e C. Knight	Source Longitu	de: -80.870969	9
HUC-8 Code: 50302  Drainage Area (sq. mi.):  ✓ Endangered Species? ✓ Mus	16.26 County: sel Stream?	Ritchie	Anticipated withdrawal start Anticipated withdrawal end		3/2014 3/2015
☐ Trout Stream? ☐ Tier			Total Volume from Source  Max. Pump rate (g	,0,	000
Regulated Stream?  Proximate PSD?			Max. Sir	multaneous Trucks:	0
✓ Gauged Stream?			Max. Truc	ck pump rate (gpm)	0
Reference Gaug 315522	20 SOUTH FORK HUGH	HES RIVER BELOW	MACFARLAN, WV		
Drainage Area (sq. mi.)	229.00		Gauge Threshold	d (cfs):	22

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45.67	14.26	31.44
2	59.55	14.26	45.31
3	65.21	14.26	50.97
4	36.87	14.26	22.63
5	25.86	14.26	11.63
6	13.90	14.26	-0.33
7	6.89	14.26	-7.34
8	3.98	14.26	-10.25
9	4.79	14.26	-9.45
10	5.20	14.26	-9.04
11	15.54	14.26	1.30
12	32.06	14.26	17.82

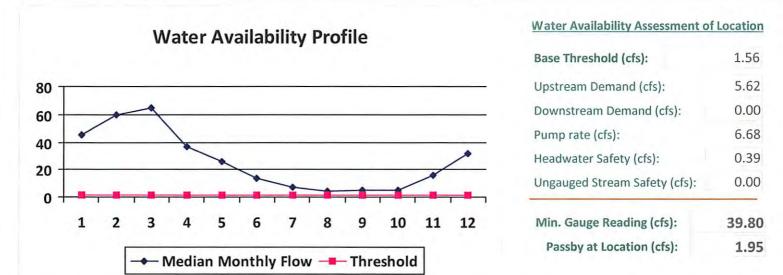

WMP-01450	API/ID Number:	047-085-10057	Operator: Antero	Resources	
	Chande	os Unit 2H			
ource ID: 24571 Source Na	ame North Fork of Hughes River	@ Davis Withdraw	al Source Latitude: 39	.322363	
	Lewis P. Davis and Norma J.	Davis	Source Longitude: -80	0.936771	
HUC-8 Code:  Drainage Area (sq. mi  ✓ Endangered Species?  ☐ Trout Stream?		Ritchie	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal):	11/13/2014 11/13/2015 8,540,000	
☐ Regulated Stream? ☐ Proximate PSD?			Max. Pump rate (gpm): 1,000  Max. Simultaneous Trucks:		
☐ Gauged Stream?			Max. Truck pump r	ate (gpm) 0	

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	42.64	4.42	38.36
2	55.59	4.42	51.32
3	60.88	4.42	56.60
4	34.42	4.42	30.14
5	24.15	4.42	19.87
6	12.98	4.42	8.70
7	6.44	4.42	2.16
8	3.72	4.42	-0.56
9	4.47	4.42	0.19
10	4.85	4.42	0.57
11	14.50	4.42	10.23
12	29.93	4.42	25.65

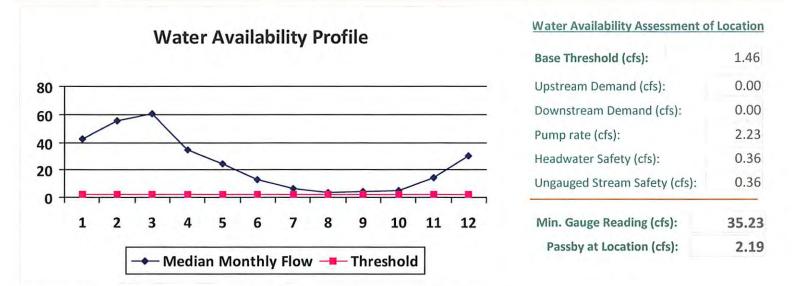

## west virginia department of environmental protection



# Water Management Plan: Secondary Water Sources



WMP-01450

API/ID Number

047-085-10057

Operator:

Antero Resources

Chandos Unit 2H

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

### Lake/Reservior

Source ID: 24576 Source Name

City of Salem Reservior (Lower Dog Run)

Source start date:

11/13/2014

Public Water Provider

Source end date:

11/13/2015

Source Lat:

39.28834

Source Long:

-80.54966

County

Harrison

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

8,540,000

#### Chandos Unit 2H

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 24577 Source Name Pennsboro Lake 11/13/2014 Source start date:

11/13/2015 Source end date:

Source Lat: 39.281689 Source Long: -80.925526 County Ritchie

8,540,000 Max. Daily Purchase (gal) Total Volume from Source (gal):

DEP Comments:

Powers Lake (Wilderness Water Park Dam) Source ID: 24578 Source Name 11/13/2014 Source start date: Private Owner 11/13/2015 Source end date:

39.255752 Source Long: -80.463262 County Harrison Source Lat:

8,540,000 Total Volume from Source (gal): Max. Daily Purchase (gal)

WMP-01450 API/ID Number 047-085-10057 Operator: Antero Resources

#### Chandos Unit 2H

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 24579 Source Name Powers Lake Two 11/13/2014 Source start date:

11/13/2015 Source end date:

Source Lat: 39.247604 Source Long: -80.466642 County Harrison

8,540,000 Max. Daily Purchase (gal) Total Volume from Source (gal):

#### Chandos Unit 2H

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

#### Other

Poth Lake (Landowner Pond) Source ID: 24580 Source Name Source start date:

11/13/2014 11/13/2015

Private Owner

Source end date:

Source Lat: 39.221306 Source Long: -80.463028 County Harrison

8,540,000 Max. Daily Purchase (gal) Total Volume from Source (gal):

**DEP Comments:** 

Source ID: 24581 Source Name Williamson Pond (Landowner Pond) 11/13/2014 Source start date:

11/13/2015 Source end date:

Source Lat: 39.19924 Source Long: -80.886161 County Ritchie

Total Volume from Source (gal): 8,540,000 Max. Daily Purchase (gal)

WMP-01450 API/ID Number 047-085-10057 Operator: Antero Resources

#### Chandos Unit 2H

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 24582 Source Name Eddy Pond (Landowner Pond) Source start date: 11/13/2014

Source end date: 11/13/2015

Source Lat: 39.19924 Source Long: -80.886161 County Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal): 8,540,000

**DEP Comments:** 

Source ID: 24583 Source Name Hog Lick Quarry Source start date: 11/13/2014
Industrial Facility Source and date: 11/13/2015

dustrial Facility Source end date: 11/13/2015

Source Lat: 39.419272 Source Long: -80.217941 County Marion

Max. Daily Purchase (gal) 1,000,000 Total Volume from Source (gal): 8,540,000

WMP-01450 API/ID Number 047-085-10057 Operator: Antero Resources

Chandos Unit 2H

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 24584 Source Name Glade Fork Mine Source start date: 11/13/2014
Industrial Facility Source end date: 11/13/2015

Source Lat: 38.965767 Source Long: -80.299313 County Upshur

Max. Daily Purchase (gal) 1,000,000 Total Volume from Source (gal): 8,540,000

**DEP Comments:** 

### **Recycled Frac Water**

Source ID: 24585 Source Name Mulvay Unit 1H Source start date: 11/13/2014

Source end date: 11/13/2015

Source Lat: Source Long: County

Max. Daily Purchase (gal)

Total Volume from Source (gal): 8,540,000

