

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS**

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: Emaline Ash Operator Well No.: 5
 Location: Elevation: 977' Quadrangle: Centerpoint 7.5'
 District: McElroy County: Tyler
 Latitude: 4,366,649 (NAD 83) Feet South of: _____ Deg. _____ Min. _____ Sec.
 Longitude: 526,627 (NAD83) Feet West of: _____ Deg. _____ Min. _____ Sec.

Well Type: Oil X Gas X WIW _____

Company: HG Energy, LLC Coal Operator or Owner _____
5260 Dupont Road
Parkersburg, WV 26101

Agent: Diane White Coal Operator or Owner _____

Permit Issued: 9/29/15

AFFIDAVIT

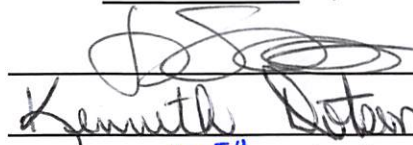
State of West Virginia, County of Wood ss:

Jared Stemple and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 8th day of November, 20 16 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
CIB Plug	2800'		4 1/2" 1116'	1819'
Class A Cement	2800'	2700'	8 5/8"	880'
Class A Cement	2160'	2050'		
Class A Cement	1150'	925'		
Class A Cement	350'	0'		
Set CIB plug @ 2800'. Perforated 4 1/2" casing 2150' - 2050' (one shot every 10'). 6% gel between all cement plugs				

Description of monument: 7" Cemented Pipe and that the work of plugging and filling said well was completed on the 15th day of November, 20 16

And further deponents saith not.

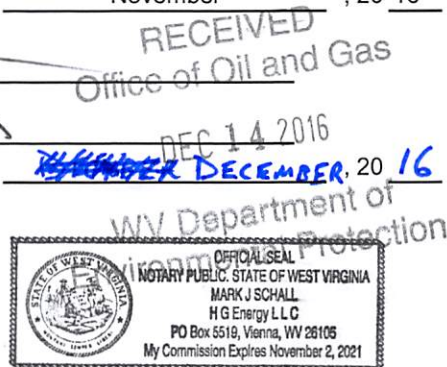

Kenneth Dotson
12TH day of NOVEMBER, 20 16

Sworn and subscribed before me this _____ day of _____
 My commission expires: 11-2-2021

Notary Public [Signature]

Affidavit reviewed by the Office of Oil and Gas: [Signature]

Title: Oil + Gas Inspector



12/16/2016