

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: Davis, Raymond V. JR. & Nor Operator Well No.: Emaline Ash 8
 Location: Elevation: 1244' Quadrangle: centerpoint 7.5'
 District: McElroy County: Tyler
 Latitude: _____ Feet South of: _____ Deg. _____ Min. _____ Sec.
 Longitude: _____ Feet West of: _____ Deg. _____ Min. _____ Sec.
 Well Type: Oil x Gas _____ WIW _____
 Company: HG Energy, LLC Coal Operator _____
5260 Dupont Road or Owner _____
Parkersburg, WV 26101
 Agent: Diane White Coal Operator _____
 or Owner _____
 Permit Issued: 6/30/15

AFFIDAVIT

State of West Virginia, County of Wood ss:

Jared Stemple and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 19th day of August, 20 15 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Cement	3135'	2975'	4 1/2" 1670'	1581'
Cement	1600'	1450'	8 5/8" 0'	1867'
Cement	1300'	1000'	11 3/4" 0'	400'
Cement	515'	350'		
Cement	150'	0'		
Perforations - 1620' - 1520' One shot every 10', 1300' - 1100' One shot every 10', 1090' - 1000' One shot every 10', 1050' - 1040' One shot per foot.				
6% gel between all cement plugs				

Description of monument: 7" Cemented metal pipe and that the work of plugging and filling said well was completed on the 19th day of August, 20 15

And further deponents saith not.


Sworn and subscribed before me this 23rd day of NOVEMBER, 20 15

My commission expires: 4/26/2020

Notary Public [Signature]

Affidavit reviewed by the Office of Oil and Gas: Michael Hoff

Title: Oil & Gas Inspector

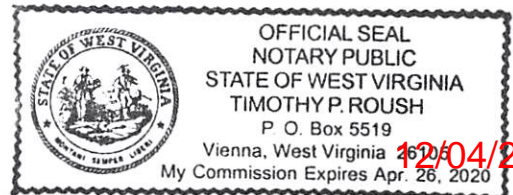

Received

NOV 25 2015

Office of Oil and Gas
WV Dept. of Environmental Protection

12/04/2015