

Tyler 118A

Union District, Tyler County, W. Va.
 By South Penn Oil Co., Chamber of Commerce Bldg., Pittsburgh, Pa.
 On 80 acres, on Buffalo Run; surface and minerals owned by Homer and
 Squaw and Olive Hess, R. F. D. No. 1, Friendly, W. Va.

Drilling commenced Nov. 13, 1924; completed, Nov. 26, 1924 (1106').
 Elevation, 722.00' L.

Shot Nov. 28, 1924, in 2nd Salt Sand.

10-bbl. oil well.

No water (fresh); salt water, 1170-1172 and 1613-1623'.


10" casing, 190'; 8 1/2", 713'; 6 3/8", 1117'.

Coal (not merchantable) was encountered at 340-345'.

Drilled deeper; commenced April 16, 1931; completed, Nov 11, 1931.

Abandonment reported to Dept. of Mines (Sept. 16, 1936).

Record to ROT from D.C. Courtney (Dept. of Mines) 5-5-37.

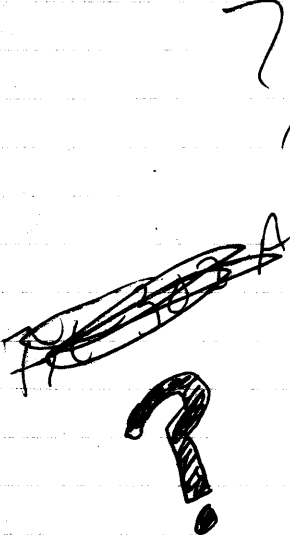

	Top.	Bottom.
Conductor	0	16
10" casing		190
Pittsburgh Coal	340	345
Little Dunkard Sand	720	743
Slate	743	750
Big Dunkard Sand (8 1/2" casing, 713')	750	770
2nd Salt Sand (oil, 1098-1106')	1060	
Total depth		1106
DRILLED DEEPER:		
Bottom of Salt Sand (6 3/8" casing, 1117')		1120
(perforation, 1090-1095')		
Sand (gas show, 1160-1164'; water, 1170-1172')	1133	1185
Sand	1325	1356
Sand	1365	1396
Marion Sand	1494	1498
Big Lime	1500	1560
Kecmer Sand	1560	1590
Big Injun Sand (gas show, 1613'; water, 1613-1623')	1612	1752
Squaw Sand	1754	1764
Total depth		1778