

AUG 13 2012

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS

WV Department of
Environmental Protection

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: Charles Gilbert
 Location: Elevation: 1256'
 District: Grant
 Latitude: _____ Feet South of: _____ Deg. _____ Min. _____ Sec.
 Longitude: _____ Feet West of: _____ Deg. _____ Min. _____ Sec.

Operator Well No.: No. 3
 Quadrangle: Big Run 7.5'
 County: Wetzel

Well Type: Oil Gas _____ WIW _____

Company: East Resources Inc.
5260 Dupont Road
Parkersburg, WV 26101
 Coal Operator or Owner: Consol Energy
1000 Consol Energy Drive
Cannonburg, PA 15317-6506

Agent: Philip S. Ondrusek
 Coal Operator or Owner: NA

Permit Issued: 5/29/12

AFFIDAVIT

State of West Virginia, County of Wood ss:

Phil Ondrusek and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 7th day of June, 2012 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED		LEFT
Cement	2280'	2150'	10"	365'	441'
Cement	2010'	1900'	8 1/4"	850'	603'
Cement	860'	760'	6 5/8"	1472'	484'
Cement	400'	300'	5 3/16"	2060'	313'
Cement	100'	0'			
Ripped 5 3/16" Casing, 3' rips every 10' from 2270' - 2180'. Perforated 8 1/4" & 10" Casing, 1 shot/10' from 1050' - 950' & 1 shot/1' from 1005' - 995'					
6% Gel Between Cement Plugs					

Description of monument: 8" x 5' and that the work of plugging and filling said well was completed on the 5th day of July, 2012


And further deponents saith not.

Sworn and subscribed before me this 2 day of AUGUST, 2012
 My commission expires: NOV. 12, 2018

Notary Public

Affidavit reviewed by the
Office of Oil and Gas:

Title:

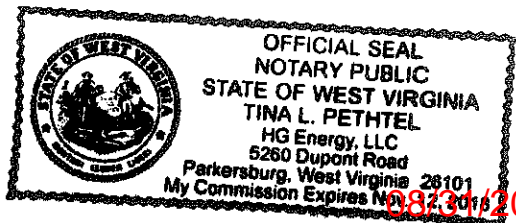

08/30/2012

File Check Commission AFFIDAVIT