

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS**

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: L. S. Hoyt Operator Well No.: No. 67
 Location: Elevation: 1292' Quadrangle: Pine Grove 7.5'
 District: Grant County: Wetzel
 Latitude: _____ Feet South of: _____ Deg. _____ Min. _____ Sec. _____
 Longitude: _____ Feet West of: _____ Deg. _____ Min. _____ Sec. _____

Well Type: Oil Gas _____ WIW _____

Company: East Resources Inc. Coal Operator or Owner: NA
5260 Dupont Road
Parkersburg, WV 26101

Agent: Philip S. Ondrusek Coal Operator or Owner: NA

Permit Issued: 11/8/12

AFFIDAVIT

State of West Virginia, County of Wood ss:

Timmy Morris and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 7th day of November, 20 12 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Cement	3085'	2965' (tag)		
Cement	2280'	2130'	6 5/8" 190'	2235'
Cement	1300'	1070' (tag)	5 3/16" 2150'	358'
Cement	550'	450'		
Cement	100'	0'		
Perforated 6 5/8" casing 1 shot/20' from 2280' - 2180', 1350' - 1250', 1 shot/10' from 1200' - 1100', 1 shot/1' from 1135' - 1125' & 1 shot/20' from 550' - 450'.				
6% Gel Between Cement Plugs				

Description of monument: 7" x 5' and that the work of plugging and filling said well was completed on the 3rd day of December, 20 12

And further deponents saith not.

Timmy A. Morris
Ken Dotson

Sworn and subscribed before me this 17th day of DECEMBER, 20 12
 My commission expires: April 26, 2020

Notary Public

[Signature]


Affidavit reviewed by the
Office of Oil and Gas:

[Signature]

Title: Oil & Gas Inspector

RECEIVED
Office of Oil & Gas
DEC. 20 12

WV Department of
Environmental Protection

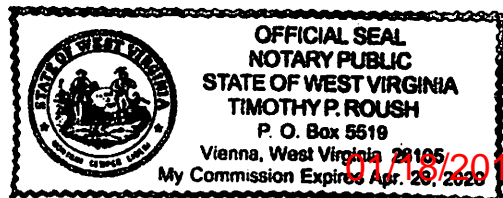

01/16/2013