

**STATE OF WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
OFFICE OF OIL & GAS**

**AFFIDAVIT OF PLUGGING AND FILLING WELL**

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: <u>Long, Helen L.</u>	Operator Well No.: <u>217</u>
Location: <u>Elevation: 718'</u>	<u>Quadrangle: Pine Grove 7.5'</u>
<u>District: Grant</u>	<u>County: Wetzel</u>
<u>Latitude: 2425</u>	<u>Feet South of: 39</u> <u>Deg. 35</u> <u>Min. 30</u> <u>Sec. 30</u>
<u>Longitude: 11,075</u>	<u>Feet West of: 80</u> <u>Deg. 37</u> <u>Min. 30</u> <u>Sec. 30</u>
Well Type:    Oil <u>X</u> Gas _____            WIW _____	
Company: <u>HG Energy, LLC</u>	Coal Operator _____
<u>5260 Dupont Road</u>	or Owner _____
<u>Parkersburg, WV 26101</u>	_____
Agent: <u>Diane White</u>	Coal Operator _____
	or Owner _____
Permit Issued: <u>10/5/15</u>	_____

**AFFIDAVIT**

State of West Virginia, County of Wood ss:

Jared Stemple and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 8th day of September, 2016 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
CIB Plug	2525'		4 1/2"      605'	2044'
Class A Cement	2520'	2400'	7"	613'
Class A Cement	1890'	1675'		
Class A Cement	1480'	1380'		
Class A Cement	770'	550'		
Class A Cement	200'	0'		
When drilled, backside of 4 1/2" casing cemented from TD to 620'.				
6% gel between all cement plugs				

Description of monument: 7" Cemented Pipe and that the work of plugging and filling said well was completed on the 12th day of September, 2016

And further deponents saith not.

*[Signature]*  
Kenneth Dotson


**RECEIVED**  
Office of Oil and Gas

Sworn and subscribed before me this 24th day of October 2016  
My commission expires: July 11, 2022

Notary Public Diane White

Affidavit reviewed by the Office of Oil and Gas: Jacqueline Thront

Title: \_\_\_\_\_

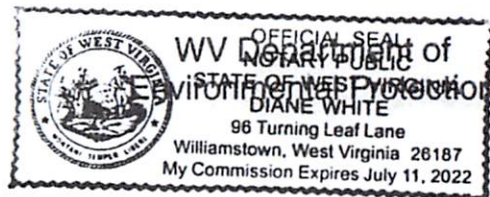

07/14/2017