


J.A.  
Cross



Lowell

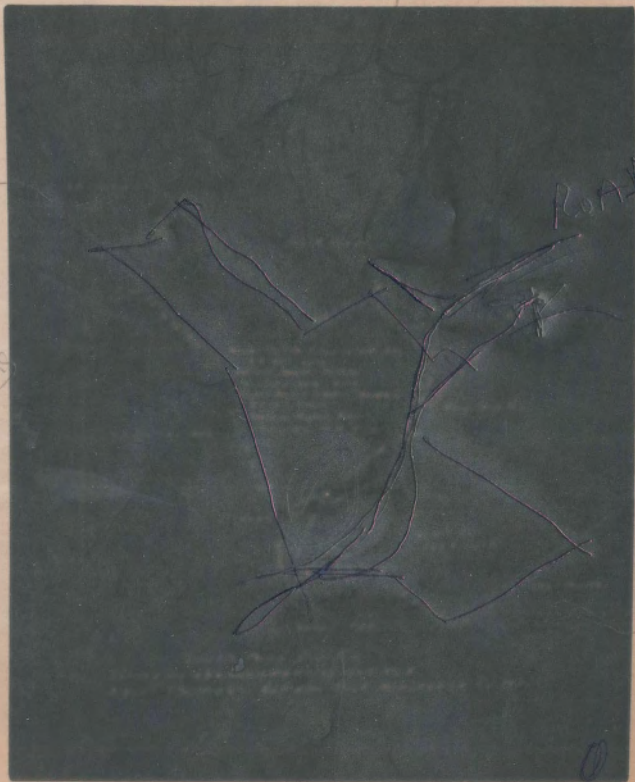

WALL



5:22 PM  
[Signature]

Collins

M.  
Lemley

J.E.  
Devine

Battelle District, Monongalia County, W. Va.  
 By South Penn Oil Co., Chamber of Commerce Bldg., Pittsburgh, Pa.  
 On 50 acres, surface owned by Naomi Tuttle et al., R. D. No. 1,  
 Fairview, W. Va., and mineral rights by Minnie Bell et al.,  
 Sawyer Savings Bank, Seymour, Iowa.

Elevation, 1112.27' L.

6-5/8" casing, 1808'; 5-3/16", 2205'.

Coal was encountered at 810-817'?

4 1/2 x 4" liner.

Abandonment reported to Dept. of Mines March 13, 1935.

	Top.	Bottom.
Pittsburgh Coal	810	
Big Injun Sand	2070	- 2220
50-Ft. Sand	2752	- 2820
Campbells Run Sand	2980	- 3005
Gordon Sand (1st pay, 3063')	3060	
Total depth		3079

MON-108-A

# WEST VIRGINIA DEPARTMENT OF MINES

## OIL AND GAS DIVISION

### PRELIMINARY DATA SHEET NO. 1

File No. \_\_\_\_\_ Well No. 5

SOUTH FERN OIL Company of Chamber of Commerce Bldg.

Pittsburgh, Pa. on the A. THOMAS Farm

containing 50 acres. Location \_\_\_\_\_

Wetzel District, in Monongalia County, West Virginia

The surface of the above tract is owned in fee by Harri Tuttle et al

of R.D. No. 1, Fairview, W. Va.

Winnie Bell et al of Sumner, Iowa.

The oil and gas privileges are held under lease by the above named company, and this well is drilled under permit

\_\_\_\_\_ issued by the West Virginia Department of Mines, Oil and Gas Division

\_\_\_\_\_

Elevation of surface at top of well, 1118.87' \_\_\_\_\_

The number of feet of the different sized casings used in the well.

\_\_\_\_\_ feet \_\_\_\_\_ dia. Wood casing

1900 ft. 2 5/8" dia. cap. 2200 ft. 2-9/16" steel cap.

\_\_\_\_\_ feet \_\_\_\_\_ dia. cap. \_\_\_\_\_ steel cap.

\_\_\_\_\_ feet \_\_\_\_\_ dia. cap. \_\_\_\_\_ steel cap.

\_\_\_\_\_ pipes of \_\_\_\_\_ dia. oil or \_\_\_\_\_

\_\_\_\_\_ pipes of \_\_\_\_\_ dia. oil or \_\_\_\_\_

\_\_\_\_\_ in casing perforated at \_\_\_\_\_ feet to \_\_\_\_\_ feet.

\_\_\_\_\_ in casing perforated at \_\_\_\_\_ feet to \_\_\_\_\_ feet.

Coal was encountered at 810 feet, (See notes) 84 (7) inches, and at \_\_\_\_\_

\_\_\_\_\_ feet thickness \_\_\_\_\_ inches, and at \_\_\_\_\_ feet thickness \_\_\_\_\_ inches.

Lines were used as follows: (Give details) 4" X 4 1/2"

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

March 15, 1900.

\_\_\_\_\_ Date

**SOUTH FERN OIL COMPANY**

3-15-31

## SOUTH PENN OIL

Company  
 Chamber of Commerce Bldg.  
 Pittsburgh, Pa. Address

## COMPLETION DATA SHEET

NO. 2

## FORMATION RECORD

Well No. S. - A. Thomas Farm.

Name	Color	Character	Oil Gas or Water	Top	Bottom	Thickness	Total Depth	Remarks
Pittsburg Coal				810				
Big Injun Sand				8070	8220			
Fifty Foot Sand				3780	3830			100' - 60'
Campbell's Run Sand				3680	3800			220' - 25'
Gordon Sand				3000	3000			10'
			1st Pay	3000				
Total Depth							5070	

Oil was not shot at \_\_\_\_\_ feet, well was shot at \_\_\_\_\_ feet

Gas  
 Fresh water at \_\_\_\_\_ feet, fresh water at \_\_\_\_\_ feet

producing  
 Oil was \_\_\_\_\_ feet.

March 18, 1922.

SOUTH PENN OIL COMPANY

Approved by Edwin J. [Signature] Lead Agent.

**AFFIDAVIT IN TRIPLICATE TO TIME AND MANNER OF  
PLUGGING AND FILLING WELL**  
(REVISED BY SECTION 5, ARTICLE 4, CHAPTER 53 OF THE CODE)  
**WEST VIRGINIA DEPARTMENT OF MINES**  
**OIL AND GAS DIVISION**

Rufus Bell et al	SOUTH FERN OIL COMPANY
R.D. No. 1, JULY 29, W. Va.	Creek of "W. VA. STATE" Bldg. Pittsburgh, Pa.
ADDRESS	ADDRESS
WELL OPERATED BY OWNER	July 28, 19 28.
ADDRESS	WELL AND LOCATION
WELL OPERATED BY OWNER	Hotelle District
ADDRESS	Newcastle County
WELL NO. 3	Well No. 3
ADDRESS	A. Thomas Farm

AFFIDAVIT TO BE MADE BY PROPRIETOR AND COPY TO BE FILED BY REGISTRAR WITH THE DEPARTMENT. THIS COPY TO BE FILED BY THE REGISTRAR AND THE OTHER COPY SENT BY REGISTER TO BE KEPT BY EACH WELL OPERATOR UNDER PENALTY OF THESE STATUTES AND RULES.

**AFFIDAVIT**

STATE OF WEST VIRGINIA, )  
County of Marion ) ss.

J. C. Knight

being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by South Fern Oil Company, well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 28th day of August, 19 28, and that the well was plugged and filled in the following manner:

Minor in which well was plugged.

Total Depth 2575'. Filled with non-porous material to 2510'. Set wood plug 2510' - 2527'. Set cement plug 2527' - 2527'. Pulled 4" of lining 120'. Filled with non-porous material to 2725'. Set wood plug 2725' - 2727'. Set cement plug 2727' - 2727'. Pulled 2 1/2" casing on hole was filled and cemented. Filled with non-porous material to 2825'. Set wood plug 2825' - 2827'. Set cement plug 2827' - 2827'. Pulled 2 1/2" casing on hole was filled and cemented. Filled with non-porous material to 1225'. Set wood plug 1225' - 1225'. Set cement plug 1225' - 1225'. Filled with non-porous material to 227'. Set 2" vent pipe 227' to surface. Vent pipe perforated 227' - 227'. Set Hering Clay Patent at 227'. Vent pipe cement in cement 227' - 725'. Filled with non-porous material to surface. Concrete cement created, top 2" x 2", bottom 12" x 12", height above ground 4". Bearing the following inscription, - S.J.C. 20. No. 3 A. Thomas Amd. 1928.

Description of monument.

THIS COPY REGISTERED OVER 20 IN COPIES AND IS RECORDED WITH THE REGISTRAR OF SECTION 5, ARTICLE 4, CHAPTER 53 OF THE CODE  
and that the work of plugging and filling said well was completed on the 18th day of June, 19 28.



*[Handwritten signature]*