

STATE OF WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: Hill, Lonnie & Theresa Operator Well No.: 7285

LOCATION: Elevation: 775 Quadrangle: Ripley  
District: Ravenswood County: Jackson  
Latitude: 1430 Feet South of 38 Deg. 52 Min. 30 Sec.  
Longitude: 7030 Feet West of 81 Deg. 40 Min. 00 Sec.

Well Type: OIL \_\_\_\_\_ GAS storage

Company Columbia Gas Transmiss Coal Operator not operated  
1700 MacCorkle Ave SE or Owner \_\_\_\_\_  
Charleston, WV 25325-1273 \_\_\_\_\_

Agent Paul Amick Coal Operator \_\_\_\_\_  
or Owner \_\_\_\_\_  
Permit Issued Date 6/11/13 \_\_\_\_\_

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of Jackson ss:

James Amos and Steven Simmons being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 12th day of December, 2013, and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Type I cement	0 ft	300 ft	none - cemented per CBL / not free	4-1/2", 7", & 8-5/8"
6% bentonite gel	300 ft	2300 ft	none - cemented per CBL / not free	4-1/2", 7", & 8-5/8"
Type I cement	2300 ft	2500 ft	none - cemented per CBL / not free	4-1/2" & 7"
6% bentonite gel	2500 ft	4344 ft	none - cemented per CBL / not free	4-1/2" & 7"
Type I cement	4344 ft	4853 ft	none - cemented per CBL / not free	4-1/2" & 7"
cast iron cement retainer	4853 ft	4855 ft	none - cemented per CBL / not free	4-1/2" & 7"
Type I cement	4855 ft	4982 ft	none - cemented per CBL / not free	4-1/2"


Description of monument: 7" casing stub with \*API 0499\* tack welded to side (30" above GL) and that the work of plugging and filling said well was completed on the 18th day of December, 2013.

And further deponents saith not. James Amos  
Steven Simmons

Sworn and subscribe before me this 9th day of January, 2014

My commission expires: 3/22/2015

Mary Marie Clendenin  
Notary Public  
James Amos

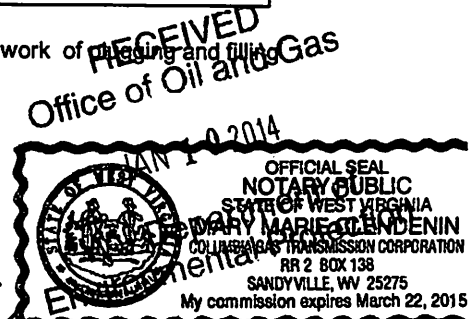

Affidavit reviewed by the Office of Oil and Gas: \_\_\_\_\_ Title: \_\_\_\_\_

01/31/2014