

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

July 30, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-1706301, issued to ANTERO RESOURCES APPALACHIAN CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chie

Operator's Well No: HEFLIN UNIT 2H

Farm Name: MOORE, DWIGHT E. & TINA M.

API Well Number: 47-1706301

Permit Type: Horizontal 6A Well

Date Issued: 07/30/2013

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- 1. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 2. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% (unless soil test results show a greater range of moisture content is appropriate and 95% compaction can still be achieved) of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95% compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 3. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 4. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 5. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 6. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 7. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW - 6B (3/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

						03	611
1) Well Operator:	Antero Reso	urces Appalachi	an Corporation	494488557	017- Doddrdige	Grant	Smithburg 7.5'
				Operator ID	County	District	Quadrangle
2) Operator's Well	Number:	Heflin Unit 2H			Well Pad Nam	e: Moore Pad (E	existing)
3 Elevation, curren	it ground:	1237'	Ele	evation, proposed	post-construct	tion:	1237'
4) Well Type: (a) (Gas _		Oil	Undergroun	d Storage		
	Other _						
(b) I		Shallow		Deep			
5) P. 141 - D. 10 W		Horizontal	-	_			
5) Existing Pad? Ye	es or No:	Yes					
6) Proposed Target Marcellus Shale: 7300' TV					d Associated	Pressure(s):	
7) Proposed Total V	ertical De	pth:	00' TVD				
8) Formation at Tot	al Vertical	Depth:	Marcellus				
9) Proposed Total N	Measured I	Depth:	18900' MD				
10) Approximate Fi	resh Water	Strata Dept	hs: 10	2'			
11) Method to Dete	rmine Fres	sh Water De	pth: Mo	oore Unit 2H (47-017-0612	29) initial well drilled o	on same pad.	
12) Approximate Sa	altwater De	epths:	1990'				
13) Approximate C	oal Seam I	Depths:	328', 863'				
14) Approximate D	epth to Po	ssible Void	(coal mine, l	karst, other):	None antici	pated V	
15) Does proposed adjacent to an a				irectly overlying and depth of mine:	or No		
16) Describe propos	sed well w	ork: Dril	l, perforate, fractu	re a new horizontal shallo	w well and complete	Marcellus Shale	
17) Describe fractur				ready the well for production	n. The fluid will be cor	nprised of approxim	ately 99 percent
water and sand, with less	than 1 percent s	pecial-purpose add	litives as shown in	the attached "List of Anticip	pated Additives Used for	or Fracturing or Stim	nulating Well."
							Office of Oil & Gas
18) Total area to be	disturbed,	including re	oads, stockp	ile area, pits, etc,	(acres):	19.93 existing	g acres
19) Area to be distu	irbed for w	ell pad only	, less access	road (acres):	1.91 existing	g acres	
					100		Dags 4 - f 2

WW - 6B (3/13)

20)

CASING AND TUBING PROGRAM

ТҮРЕ	Size	<u>New</u> or <u>Used</u>	<u>Grade</u>	Weight per	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	300'	300'	CTS, 417 Cu. Ft.
Coal	9-5/8"	New	J-55	36#	2480'	2480'	CTS, 1010 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	18900'	18900'	4790 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7100'	
Liners							

10 / 70 /3

ТҮРЕ	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

PACKERS

Kind:	N/A	
Sizes:	N/A	Received Office of Oil & Gas
Depths Set:	N/A	Office of Oil & Gas

WW - 6B (3/13)

21) Describe centralizer placement for each casing string.	Conductor: no centralizers
Surface Casing: one centralizer 10' above the float shoe, or	one on the insert float collar and one every 4th joint
spaced up the hole to surface.	
Intermediate Casing: one centralizer above float joint, on	e centralizer 5' above float collar and one every 4th collar
to surface.	
Production Casing: one centralizer at shoe joint and one e	every 3 joints to top of cement in intermediate casing.
22) Describe all cement additives associated with each ce	ement type.
Conductor: no additives, Class A cement.	
Surface: Class A cement with 2% calcium and 1/4 lb flake	e, 5 gallons of clay treat
Intermediate: Class A cement with 1/4 lb of flake, 5 gallon	s of clay treat
Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1%	6 C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51
Production: Tail cement- Class H + 45 PPS Calcium Carbonate +	1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20
23) Proposed borehole conditioning procedures.	onductor: blowhole clean with air, run casing, 10 bbls fresh water.
Surface: blowhole clean with air, trip to conductor shoe, trip	p to bottom, blowhole clean with air, trip out, run casing,
circulate pipe capacity + 40 bbls fresh water followed by 25	5 bbls bentonite mud, 10 bbls fresh water spacer.
Intermediate: blowhole clean with air, trip to surface casing sh	oe, trip to bottom, blowhole clean with air, trip out, run casing,
circulate 40 bbls brine water followed by 10 bbls fresh water	er and 25 bbls bentonite mud, pump 10 bbls fresh water.
Production: circulate with 14 lb/gal NaCl mud, trip to middle of la	teral, circulate, pump high viscosity sweep, trip to base of curve,

pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

*Note: Attach additional sheets as needed.

Received Office of Oil & Gas

	Page	of	
API Number 47 - 017	-	6301	
Operator's Well	No. Heflin	Unit 2H	

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Watershed (HUC 10) Wolfpe	n Run Ç	Quadrangle Smithburg 7.5'
Elevation 1237'	County_Doddridge	District_ Grant
Will a pit be used for drill cut	tings? Yes No X	e proposed well work? Yes X No e. Drilling/Flowback fluids will be stored in tanks. Cuttings will be contained and hauled off site.
	r be used in the pit? Yes No _>	
	Method For Treated Pit Wastes:	
Un Re Of	nd Application Iderground Injection (UIC Permit Numburger) USE (at API Number Future permitted well locate USE Site Disposal (Meadowfill Landfill Permither (Explain)	itions when applicable. API# will be provided on Form WR-34 it #SWF-1032-98)
Will closed loop system be us	sed? Yes	
		etc. Surface - Air/Freshwater, Intermediate - Dust/Stiff Foam, Production - Water Based Mud
1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	rpe? Synthetic, petroleum, etc. N/A	
	g medium? Please See Attachment	
		e, etc. Stored in tanks, removed offsite and taken to landfill.
	n to solidify what medium will be used?	
	ame/permit number? Meadowfill Landfill (Pe	
on August 1, 2005, by the Of provisions of the permit are of law or regulation can lead to a law or regulation form and all attraction application form and all attractions application form and all attractions for submitting false Company Official Signature_ Company Official (Typed Nature)	fice of Oil and Gas of the West Virginia tenforceable by law. Violations of any tenforcement action. Alty of law that I have personally exam achments thereto and that, based on not believe that the information is true, actinformation, including the possibility of	ons of the GENERAL WATER POLLUTION PERMIT issue Department of Environmental Protection. I understand that the term or condition of the general permit and/or other applical mined and am familiar with the information submitted on the submitted on the information of those individuals immediately responsible focurate, and complete. I am aware that there are significated fine or imprisonment.
Company Official Title En	vironmental Specialist	
	vironii ontai oposiailot	

Form WW-9 Operator's Well No. Heflin Unit 2H Antero Resources Appalachian Corporation Proposed Revegetation Treatment: Acres Disturbed 19.93 (existing) Prevegetation pH __Tons/acre or to correct to pH 6.5 Hay or straw or Wood Fiber (will be used where needed Fertilizer (10-20-20 or equivalent) 500 lbs/acre (500 lbs minimum) Mulch 2-3 Tons/acre Existing Drill Pad(1.19) + Existing Tank Pad(1.15) + Existing Waste Area(1.11) + Existing Access Road(2.77) + Existing Additional Clearing(12.99) = 19.93 Existing Acres Seed Mixtures Area I (Temporary) Area II (Permanent) Seed Type lbs/acre Seed Type lbs/acre Annual Ryegrass 40 Fox Tail/ Grassy Perennial Rye 30 Crown Vetch *or type of grass seed requested by surface owner 20 *or type of grass seed requested by surface owner Drawing(s) of road, location, pit and proposed area for land application. Photocopied section of involved 7.5' topographic sheet. Plan Approved by:

Field Reviewed?

) Yes

119 200

west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01277

API/ID Number:

047-017-06301

Operator:

Antero Resources

Heflin Unit 2H

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- •Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED JUL 3 0 2013

Source Summary

WMP-01277

API Number:

047-017-06301

Operator:

Antero Resources

Heflin Unit 2H

Stream/River

Source Ohio River @ Ben's Run Withdrawal Site
 Tyler Owner: Ben's Run Land Company

Limited Partnership

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

10/27/2013 10/27/2014 9,270,000 39.46593 -81.110781

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 3,360 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source West Fork River @ JCP Withdrawal
 Harrison Owner: James & Brenda Raines

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

10/27/2013 10/27/2014 9,270,000 39.320913 -80.337572

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000 WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm): 2,000 Min. Gauge Reading (cfs): 175.00 Min. Passby (cfs) 146.25

DEP Comments:

Source West Fork River @ McDonald Withdrawal Harrison Owner: David Shrieves

 Start Date
 End Date
 Total Volume (gal)
 Max. daily purchase (gal)
 Intake Latitude:
 Intake Longitude:

 10/27/2013
 10/27/2014
 9,270,000
 39.16761
 -80.45069

☑ Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000 WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm): 3,000 Min. Gauge Reading (cfs): 175.00 Min. Passby (cfs) 106.30

Source	West Fork Rive	r @ GAL Withdraw	al	!	Harrison	Owner:	David Shrieves
Start Date 10/27/2013	End Date 10/27/2014		olume (gal) 70,000	Max. daily pure	chase (gal)	Intake Latitude 39.16422	e: Intake Longitude: -80.45173
☑ Regulated	Stream? Stone	ewall Jackson Dam	Ref. Gauge ID	: 3061000		WEST FORK RIVER AT EN	TERPRISE, WV
Max. Pump ı	rate (gpm):	2,000 Min	. Gauge Readi	ng (cfs):	175.00	Min. Passby ((cfs) 106.30
	DEP Commer	its:					
Source	Middle Island C	Creek @ Dawson W	ithdrawal		Tyler	Owner:	Gary D. and Rella A. Dawson
Start Date 10/27/2013	End Date 10/27/2014		olume (gal) 70,000	Max. daily pur	chase (gal)	Intake Latitude 39.379292	e: Intake Longitude: -80.867803
Regulated	Stream?		Ref. Gauge ID	: 3114500		MIDDLE ISLAND CREEK	AT LITTLE, WV
Max. Pump	rate (gpm):	3,000 Min	. Gauge Readi	ng (cfs):	76.03	Min. Passby	(cfs) 28.83
	DEP Commer	nts:					
Source	McElroy Creek	@ Forest Withdrav	val		Tyler	Owner: F	orest C. & Brenda L. Moore
Start Date 10/27/2013	End Date 10/27/2014		/olume (gal) 70,000	Max. daily pur	chase (gal)	Intake Latitude 39.39675	e: Intake Longitude: -80.738197
☐ Regulated	Stream?		Ref. Gauge ID	: 3114500		MIDDLE ISLAND CREEK	AT LITTLE, WV
Max. Pump	rate (gpm):	1,000 Min	. Gauge Readi	ng (cfs):	74.77	Min. Passby	(cfs) 13.10

9	Source	McElroy Creek	@ Sweene	y Withdrawal		Doddridge	Owner:	Bill Sweeney
	Start Date 10/27/2013	End Date 10/27/2014		Total Volume (gal) 9,270,000	Max. daily	purchase (gal)	Intake Latitud 39.398123	_
	☐ Regulated	Stream?		Ref. Gauge I	D: 3114 !	500	MIDDLE ISLAND CREEK	AT LITTLE, WV
	Max. Pump r	ate (gpm):	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. Passby	(cfs) 6.66
		DEP Commer	nts:					
a	Source	Meathouse For	·k @ Gagne	on Withdrawal		Doddridge	Owner: G	ieorge L. Gagnon and
	Jource	Wicatilouse i oi	we ough			5 000 	5	Susan C. Gagnon
	Start Date 10/27/2013	End Date 10/27/2014		Total Volume (gal) 9,270,000	Max. daily	purchase (gal)	Intake Latitud 39.26054	e: Intake Longitude: -80.720998
	☐ Regulated	Stream?		Ref. Gauge I	D: 3114	500	MIDDLE ISLAND CREEK	AT LITTLE, WV
	Max. Pump r	ate (gpm):	1,000	Min. Gauge Reac	ling (cfs):	71.96	Min. Passby	(cfs) 11.74
		DEP Commer	nts:					
0	Source	Meathouse Fo	·k @ White	hair Withdrawal		Doddridge	Owner:	Elton Whitehair
	Start Date 10/27/2013	End Date 10/27/2014		Total Volume (gal) 9,270,000	Max. daily	purchase (gal)	Intake Latitud 39.211317	le: Intake Longitude: -80.679592
	☐ Regulated	Stream?		Ref. Gauge I	D: 3114	500	MIDDLE ISLAND CREEK	AT LITTLE, WV
	Max. Pump r	ate (gpm):	1,000	Min. Gauge Réac	ling (cfs):	69.73	Min. Passby	(cfs) 7.28

08/02/2013

Source	Tom's Fork @ E	rwin Withdra	awal		Doddridge	Owner:	John F. Erv	vin and Sandra E. Erwin
Start Date 10/27/2013	End Date 10/27/2014	1	Fotal Volume (gal) 9,270,000	Max. daily p	ourchase (gal)		e Latitude: . 174306	Intake Longitude: -80.702992
☐ Regulated	Stream?		Ref. Gauge IC): 31145	00	MIDDLE ISLAND	O CREEK AT I	LITTLE, WV
Max. Pump	rate (gpm):	1,000	Min. Gauge Read	ing (cfs):	69.73	Min.	Passby (cfs	o.59
	DEP Commen	ts:						
Source	Arnold Creek @	Davis Witho	irawal		Doddridge	Owner:		Jonathon Davis
Start Date 10/27/2013	End Date 10/27/2014	1	Fotal Volume (gal) 9,270,000	Max. daily p	ourchase (gal)		e Latitude: 0.302006	Intake Longitude: -80.824561
☐ Regulated	Stream?		Ref. Gauge IC): 31145	00	MIDDLE ISLAND	O CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	1,000	Min. Gauge Read	ing (cfs):	69.73	Min.	Passby (cfs	s) 3.08
	DEP Commen	ts:						
Source	Buckeye Creek	@ Powell Wi	ithdrawal		Doddridge	Owner:		Dennis Powell
Start Date 10/27/2013	End Date 10/27/2014	ī	Fotal Volume (gal) 9,270,000	Max. daily p	ourchase (gal)		e Latitude: 0.277142	Intake Longitude: -80.690386
☐ Regulated	Stream?		Ref. Gauge IE): 31145	00	MIDDLE ISLANI	D CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	1,000	Min. Gauge Read	ing (cfs):	69.73	Min.	Passby (cfs	s) 4.59

Source South Fork of Hughes River @ Knight Withdrawal Ritchie Tracy C. Knight & Owner: Stephanie C. Knight Max. daily purchase (gal) Total Volume (gal) Intake Latitude: Intake Longitude: Start Date **End Date** 9,270,000 39.198369 -80.870969 10/27/2014 10/27/2013 Regulated Stream? **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ Ref. Gauge ID: 3155220 Min. Gauge Reading (cfs): 39.80 Min. Passby (cfs) 1.95 Max. Pump rate (gpm): 3,000 **DEP Comments:** Ritchie Lewis P. Davis and Norma North Fork of Hughes River @ Davis Withdrawal Owner: Source J. Davis Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date **End Date** 10/27/2013 10/27/2014 9,270,000 39.322363 -80.936771 ☐ Regulated Stream? **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ Ref. Gauge ID: 3155220 Min. Passby (cfs) Max. Pump rate (gpm): 1.000 Min. Gauge Reading (cfs): 35.23 2.19

Source Summary

WMP-01277

API Number:

047-017-06301

Operator:

Antero Resources

Heflin Unit 2H

Purchased Water

Ohio River @ Select Energy **Pleasants** Owner: Source

Select Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

10/27/2013

10/27/2014

9,270,000

500,000

39.346473

-81.338727

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

1,680

Min. Gauge Reading (cfs):

7,216.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Middle Island Creek @ Solo Construction

Pleasants

Owner:

Solo Construction, LLC

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

10/27/2013

10/27/2014

9,270,000

1,000,000

39.399094

-81.185548

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Elevation analysis indicates that this location has the same elevation as Middle Island Creek's pour point into the Ohio River. As such, it is deemed that water flow at this

location is heavily influenced by the Ohio River.

Source

Claywood Park PSD

Wood

Owner:

Claywood Park PSD

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

10/27/2013

10/27/2014

9,270,000

▼ Regulated Stream?

Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

7,216.00

Min. Passby (cfs)

DEP Comments:

Elevation analysis indicates that this location has approximately the same elevation as Little Kanawha's pour point into the Ohio River. As such, it is deemed that water flow

at this location is heavily influenced by the Ohio River.

Sun Valley Public Service District Source

Harrison

Owner:

Sun Valley PSD

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

10/27/2013

10/27/2014

☑ Regulated Stream? **Stonewall Jackson Dam** Ref. Gauge ID:

9,270,000

200,000

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

171.48

Min. Passby (cfs)

WMP-01277 API/ID Number: 047-017-06301 Operator: Antero Resources Heflin Unit 2H Ohio River @ Select Energy 19336 Source Latitude: 39.346473 Source ID: Source Name Source Longitude: -81.338727 Select Energy 5030201 HUC-8 Code: Anticipated withdrawal start date: 10/27/2013 Drainage Area (sq. mi.): 25000 County: Pleasants 10/27/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 9,270,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 1,680 Ohio River Min. Flow Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 9999998 Ohio River Station: Racine Dam Reference Gaug 25,000.00 7216 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	Available water (cfs)
1	50,956.00	4	1
2	54,858.00		
3	73,256.00		
4	62,552.00	*	
5	43,151.00	1.3	1.9
6	27,095.00	100	1.2
7	17,840.00		1.0
8	14,941.00	160	
9	14,272.00	1.5	0.7
10	17,283.00	-	9
11	29,325.00		
12	46,050.00	-	-

Water Availability Profile 80000 Flow on this stream is regulated by the Army Corps of Engineers. Please athere to the stated thresholds to maintain the minimum guaranteed flow requirements. 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow — Threshold

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00

Water Availability Assessment of Location

Pump rate (cfs): 3.74
Headwater Safety (cfs): 0.00

Ungauged Stream Safety (cfs):

Passby at Location (cfs):

Min. Gauge Reading (cfs):


"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

0.00

WMP-01277 API/ID Number: 047-017-06301 Operator: Antero Resources Heflin Unit 2H Middle Island Creek @ Solo Construction Source Latitude: 39.399094 Source ID: 19337 Source Name Solo Construction, LLC Source Longitude: -81.185548 HUC-8 Code: 5030201 10/27/2013 Anticipated withdrawal start date: Pleasants Drainage Area (sq. mi.): 25000 County: Anticipated withdrawal end date: 10/27/2014 **Endangered Species?** ✓ Mussel Stream? 9,270,000 Total Volume from Source (gal): Trout Stream? Tier 3? Max. Pump rate (gpm): Regulated Stream? Ohio River Min. Flow Max. Simultaneous Trucks: Proximate PSD? City of St. Marys Max. Truck pump rate (gpm) Gauged Stream? 9999999 Ohio River Station: Willow Island Lock & Dam Reference Gaug 25,000.00 6468 Gauge Threshold (cfs): Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	45,700.00	4	
2	49,200.00	-	-2
3	65,700.00	-	.9
4	56,100.00	4	
5	38,700.00	9	9
6	24,300.00	-	2.
7	16,000.00	-	4
8	13,400.00	197	
9	12,800.00	4	+
10	15,500.00		-
11	26,300.00	31	=
12	41,300.00		2



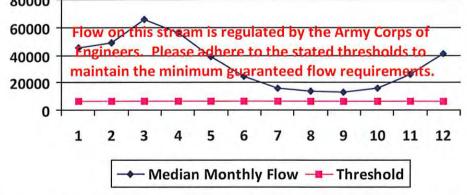



Water Availability Assessment of Location

Base Threshold (cfs):	
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	50,956.00		-
2	54,858.00		-
3	73,256.00		-
4	62,552.00	12	~
5	43,151.00	₩ <u>₹</u>	10.0
6	27,095.00		-
7	17,840.00		~
8	14,941.00	14.	-
9	14,272.00	(4,	~
10	17,283.00		-
11	29,325.00	-	- £
12	46,050.00	-	



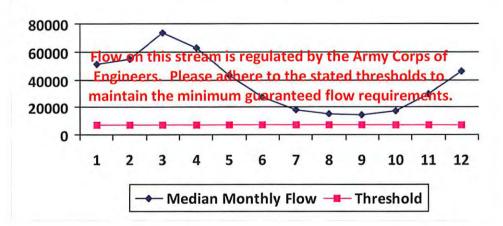


Water Availability Assessment of Location

Base Threshold (cfs):	
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

WMP-01277 API/ID Number: 047-017-06301 Operator: Antero Resources Heflin Unit 2H Sun Valley Public Service District Source ID: 19339 Source Latitude: -Source Name Sun Valley PSD Source Longitude: -5020002 HUC-8 Code: 10/27/2013 Anticipated withdrawal start date: 391.85 Harrison Drainage Area (sq. mi.): County: 10/27/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 9,270,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Regulated Stream? Stonewall Jackson Dam Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? Reference Gaug 3061000 WEST FORK RIVER AT ENTERPRISE, WV 759.00 234 Gauge Threshold (cfs): Drainage Area (sq. mi.)


Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Estimated</u> <u>Available</u> water (cfs)	
1	1,200.75		4	
2	1,351.92	*		
3	1,741.33			
4	995.89		-	
5	1,022.23		W ±	
6	512.21			
7	331.86	.0	*.	
8	316.87			
9	220.48		-	
10	216.17	-	1.5	
11	542.45	- 4		
12	926.12	-		

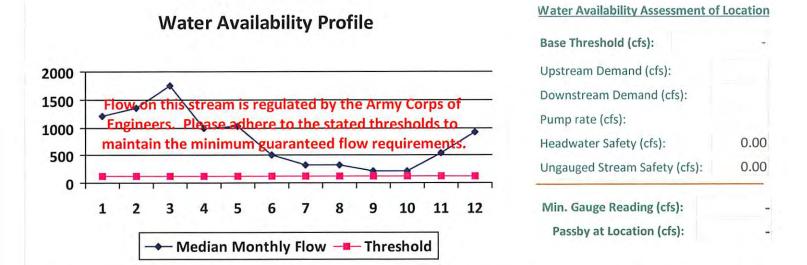

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.




Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	45,700.00	2	-
2	49,200.00		4
3	65,700.00		-
4	56,100.00	10	-
5	38,700.00		
6	24,300.00	Δ.	-
7	16,000.00	19	1 4
8	13,400.00	-	- A
9	12,800.00	(8)	7
10	15,500.00	1.4.	
11	26,300.00		
12	41,300.00	G.	-

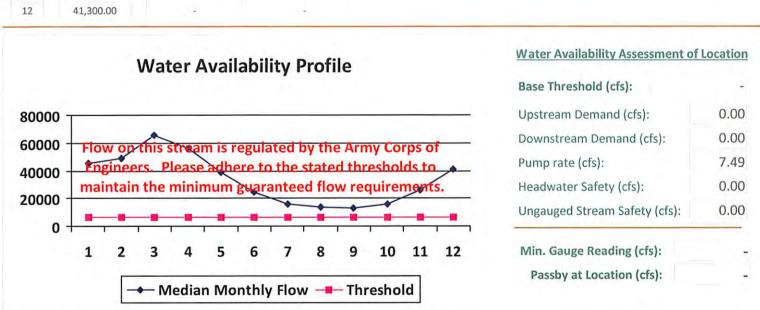

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-012	277 API/ID Num	ber: 047-017-00	Operator:	Antero Resou	irces
		Heflin Unit 2H			
Source ID: 19323 Source	e Name West Fork River @ JC	P Withdrawal	Source L	Latitude: 39.3209	13
	James & Brenda Rain	es	Source Lo	ngitude: -80.3375	572
HUC-8 Code: Drainage Area (so Endangered Species? Trout Stream? ✓ Regulated Stream?	5020002 q. mi.): 532.2 County: ✓ Mussel Stream? ☐ Tier 3? Stonewall Jackson Dam	Harrison	Anticipated withdrawal Anticipated withdrawal Total Volume from So Max. Pump re	l end date: 10 purce (gal): 9	/27/2013 /27/2014 ,270,000 2,000
☐ Proximate PSD? ☐ Gauged Stream?	Stonewan sackson barn		N	Max. Simultaneous Truc	
Reference Gaug Drainage Area (sq. r		RIVER AT ENTERPRIS	The state of the s	eshold (cfs):	234

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	1,630.82		
2	1,836.14	-	-
3	2,365.03	4	144
4	1,352.59		12.
5	1,388.37	-	
6	695.67	102	1.5
7	450.73		-
8	430.37	-	1.0
9	299.45	-	-
10	293.59	1.5	1.0
11	736.74		
12	1,257.84	2	2

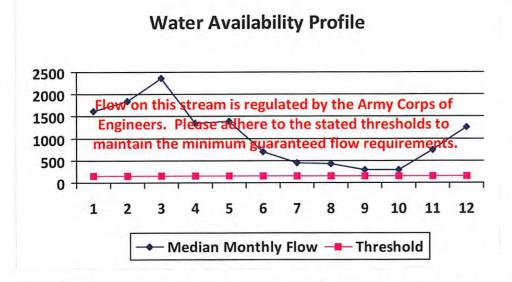


Base Threshold (cfs):	-
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01277 API/ID Number: 047-017-06301 Operator: Antero Resources Heflin Unit 2H West Fork River @ McDonald Withdrawal Source Latitude: 39.16761 Source ID: 19324 Source Name **David Shrieves** Source Longitude: -80.45069 5020002 HUC-8 Code: Anticipated withdrawal start date: 10/27/2013 Drainage Area (sq. mi.): 314.91 County: Harrison Anticipated withdrawal end date: 10/27/2014 **Endangered Species?** ✓ Mussel Stream? 9,270,000 Total Volume from Source (gal): Trout Stream? Tier 3? 3,000 Max. Pump rate (gpm): Regulated Stream? Stonewall Jackson Dam Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 3061000 WEST FORK RIVER AT ENTERPRISE, WV Reference Gaug 759.00 Gauge Threshold (cfs): 234 Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	964.98	-	
2	1,086.47		1.2
3	1,399.42		1.5
4	800.34	2	-
5	821.52	-	-
6	411.64		
7	266.70		
8	254.66	(÷	
9	177.19	4	- 1
10	173.72	-	7
11	435.94	-	(+)
12	744.28	~	-

Water Availability Profile

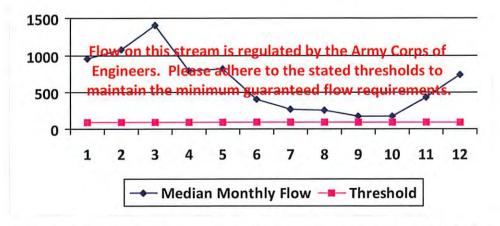


Base Threshold (cfs):	-
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	6.68
Headwater Safety (cfs):	24.27
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

WMP-01277 API/ID Number: 047-017-06301 Antero Resources Operator: Heflin Unit 2H West Fork River @ GAL Withdrawal Source ID: 19325 Source Latitude: 39.16422 Source Name David Shrieves Source Longitude: -80.45173 5020002 HUC-8 Code: Anticipated withdrawal start date: 10/27/2013 Drainage Area (sq. mi.): 313.67 County: Harrison Anticipated withdrawal end date: 10/27/2014 **Endangered Species?** ✓ Mussel Stream? 9,270,000 Total Volume from Source (gal): Trout Stream? Tier 3? 2,000 Max. Pump rate (gpm): Regulated Stream? Stonewall Jackson Dam Proximate PSD? Max. Simultaneous Trucks: Gauged Stream? Max. Truck pump rate (gpm) 3061000 WEST FORK RIVER AT ENTERPRISE, WV Reference Gaug 759.00 234 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	961.18		
2	1,082.19	16	10
3	1,393.91	1.5	
4	797.19		- 1
5	818.28	Gen (-
6	410.02	14	
7	265.65	0.540	-
8	253.65	1	2
9	176.49	143	1.5
10	173.04	1.41	1 S
11	434.22	14	4.
12	741.35	+	



Water Availability Profile

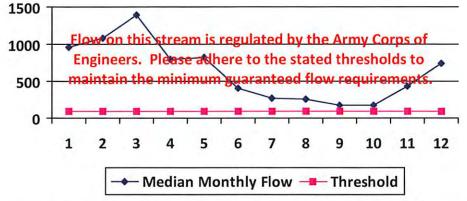


Water Availability Assessment of Location

Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	24.18
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

WMP-012	277	API/ID Number:	047-017-0630	1 Operator: Anter	o Resources
		Hef	in Unit 2H		
Source ID: 19326 Source	e Name	Middle Island Creek @ Da	wson Withdrawal	Source Latitude: 3	9.379292
		Gary D. and Rella A. Daws	on	Source Longitude: -	80.867803
HUC-8 Code: Drainage Area (sq Endangered Species? Trout Stream? Regulated Stream?	,.	181.34 County: sel Stream?	Tyler	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm):	
☐ Proximate PSD?☑ Gauged Stream?				Max. Simultane Max. Truck pum	

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	194.47	42.06	152.68
2	244.62	42.06	202.83
3	273.72	42.06	231.93
4	203.26	42.06	161.47
5	107.22	42.06	65.43
6	37.44	42.06	-4.35
7	21.19	42.06	-20.60
8	17.45	42.06	-24.34
9	8.94	42.06	-32.85
10	11.23	42.06	-30.56
11	54.82	42.06	13.04
12	133.96	42.06	92.17



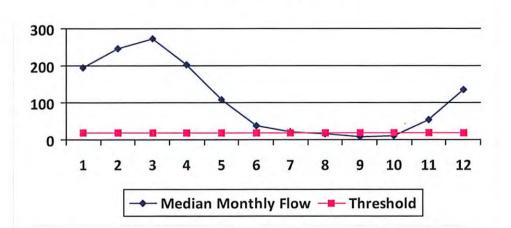

Water Availability Assessmen	nt of Location
Base Threshold (cfs):	17.82

Upstream Demand (cfs): 13.10

Downstream Demand (cfs): 6.55

Pump rate (cfs): 6.68

Headwater Safety (cfs): 4.45

Ungauged Stream Safety (cfs): 0.00

Min. Gauge Reading (cfs):

76.03

Passby at Location (cfs):

28.82

WMP-01277 API/ID Number: 047-017-06301 Operator: Antero Resources Heflin Unit 2H Source ID: 19327 McElroy Creek @ Forest Withdrawal Source Latitude: 39.39675 Source Name Forest C. & Brenda L. Moore Source Longitude: -80.738197 5030201 HUC-8 Code: 10/27/2013 Anticipated withdrawal start date:

Tyler

Endangered Species?

Mussel Stream?

Drainage Area (sq. mi.):

Regulated Stream?

Reference Gaug

Proximate PSD?

☐ Gauged Stream?

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

County:

Drainage Area (sq. mi.)

458.00

88.85

Gauge Threshold (cfs):

Max. Pump rate (gpm):

Max. Simultaneous Trucks:

Max. Truck pump rate (gpm)

Anticipated withdrawal end date:

Total Volume from Source (gal):

45

10/27/2014

9,270,000


1,000

0

0

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	95.28	19.78	75.68
2	119.86	19.78	100.25
3	134.11	19.78	114.51
4	99.59	19.78	79.99
5	52.54	19.78	32.93
6	18.35	19.78	-1.26
7	10.38	19.78	-9.22
8	8.55	19.78	-11.05
9	4.38	19.78	-15.23
10	5.50	19.78	-14.10
11	26.86	19.78	7.26
12	65.63	19.78	46.03

Water Availability Profile

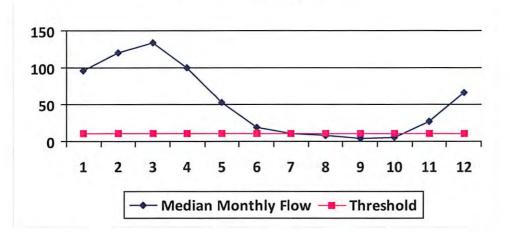


Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	74.19 13.09
Ungauged Stream Safety (cfs):	2.18
Headwater Safety (cfs):	2.18
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	4.46
Base Threshold (cfs):	8.73

WMP-01277	API/ID Number:	047-017-06301	Operator:	Antero F	Resources
	Heflin	Unit 2H			
ource ID: 19328 Source Name	McElroy Creek @ Sweeney \	Withdrawal	Source I	Latitude: 39.	398123
	Bill Sweeney		Source Lo	ongitude: -80	.656808
Drainage Area (sq. mi.): ✓ Endangered Species? ✓ M ☐ Trout Stream? ☐ Ti	0201 45.16 County: Do ussel Stream? er 3?	ddridge	anticipated withdrawal Anticipated withdrawal Total Volume from Sc Max. Pump r	l end date: ource (gal):	10/27/2013 10/27/2014 9,270,000 1,000
☐ Regulated Stream? ☐ Proximate PSD? ☐ Gauged Stream?			N	Aax. Simultaneou ax. Truck pump ra	is Trucks: 0
Reference Gaug 3114	500 MIDDLE ISLAND CRE	EK AT LITTLE, WV			
Drainage Area (sq. mi.)	458.00		Gauge Thre	eshold (cfs):	45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	48.43	8.88	39.93
2	60.92	8.88	52.42
3	68.17	8.88	59.67
4	50.62	8.88	42.12
5	26.70	8.88	18.21
6	9.32	8.88	0.83
7	5.28	8.88	-3.22
8	4.34	8.88	-4.15
9	2.23	8.88	-6.27
10	2.80	8.88	-5.70
11	13.65	8.88	5.16
12	33.36	8.88	24.86

Water Availability Profile

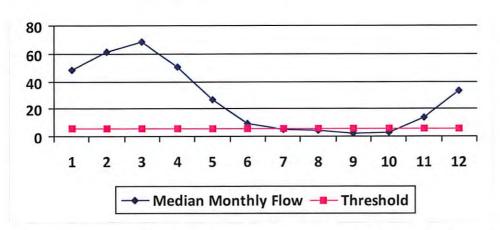

Water Availability Assessment of Location


6.66
9.73
1.11
1.11
2.23
0.00
0.00
1.44

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01277	API/ID Number:	047-017-06301	Operator: Antero	Resources
	Heflin	Unit 2H		
Source ID: 19329 Source Name	Meathouse Fork @ Gagnon	Withdrawal	Source Latitude: 39	9.26054
	George L. Gagnon and Susan	C. Gagnon	Source Longitude: -8	0.720998
HUC-8 Code: 50302: Drainage Area (sq. mi.): ✓ Endangered Species? ✓ Muss Trout Stream? □ Tier: Regulated Stream? Proximate PSD? Gauged Stream?	60.6 County: Do	ddridge	nticipated withdrawal start date: nticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneo	
Reference Gaug 311450 Drainage Area (sq. mi.)	0 MIDDLE ISLAND CRE	EK AT LITTLE, WV	Gauge Threshold (cfs):	45

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	64.99	13.39	51.70
2	81.75	13.39	68.46
3	91.47	13.39	78.19
4	67.93	13.39	54.64
5	35.83	13.39	22.55
6	12.51	13.39	-0.77
7	7.08	13.39	-6.20
8	5.83	13,39	-7.45
9	2.99	13.39	-10.30
10	3.75	13.39	-9.53
11	18.32	13.39	5.04
12	44.76	13.39	31.48

Water Availability Profile

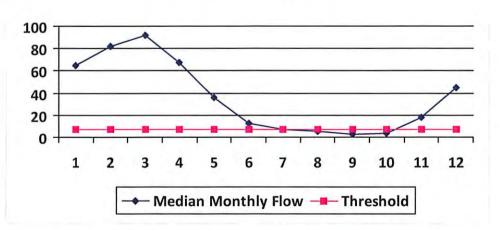


Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	71.96 11.74
Ungauged Stream Safety (cfs):	1.49
Headwater Safety (cfs):	1.49
Pump rate (cfs):	2.23
Downstream Demand (cfs):	2.81
Upstream Demand (cfs):	2.23
Base Threshold (cfs):	5.95


WMP-01277	API/ID Number: 047-017-063	Operator: Antero	Resources
	ouse Fork @ Whitehair Withdrawal	Source Latitude: 39. Source Longitude: -80	211317
HUC-8 Code: 5030201 Drainage Area (sq. mi.): 30.37 ✓ Endangered Species? ✓ Mussel Str. □ Trout Stream? □ Tier 3?	County: Doddridge eam?	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal):	10/27/2013 10/27/2014 9,270,000
☐ Regulated Stream?☐ Proximate PSD?☐ Gauged Stream?		Max. Pump rate (gpm): Max. Simultaneou Max. Truck pump ra	

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	32.57	6.70	26.15
2	40.97	6.70	34.55
3	45.84	6.70	39.42
4	34.04	6.70	27.62
5	17.96	6.70	11.54
6	6.27	6.70	-0.15
7	3.55	6.70	-2.87
8	2.92	6.70	-3.50
9	1.50	6.70	-4.92
10	1.88	6.70	-4.54
11	9.18	6.70	2.76
12	22.43	6.70	16.01

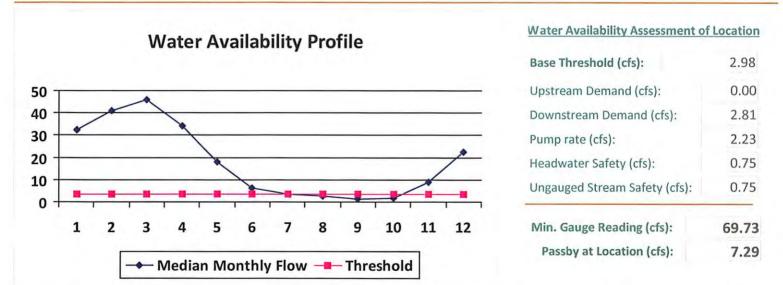

WMP-01277	API/ID Number:	047-017-06301	Operator:	Antero R	esources
	Hefli	n Unit 2H			
Source ID: 19331 Source Name	Tom's Fork @ Erwin Withda John F. Erwin and Sandra E		Source Lo	atirade.	174306 702992
		oddridge An		end date: urce (gal):	
Reference Gaug 31145 Drainage Area (sq. mi.)	00 MIDDLE ISLAND CR 458.00	EEK AT LITTLE, WV	Gauge Thre	shold (cfs):	45


Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	4.30	2.82	1.88
2	5.41	2.82	2.98
3	6.05	2.82	3.63
4	4.49	2.82	2.07
5	2.37	2.82	-0.05
6	0.83	2.82	-1.60
7	0.47	2.82	-1.96
8	0.39	2.82	-2.04
9	0.20	2.82	-2.23
10	0.25	2.82	-2.18
11	1.21	2.82	-1.21
12	2.96	2.82	0.54

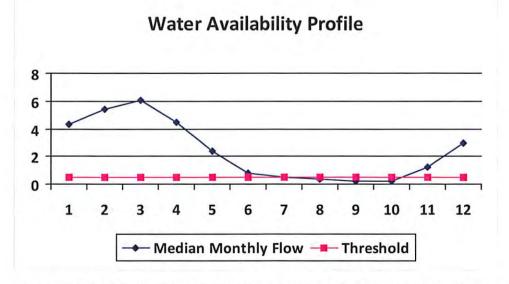

69.73
0.10
0.10
2.23
0.00
0.00
0.39

WMP-01277 API/ID Number: 047-017-06301 Operator: Antero Resources Heflin Unit 2H Source ID: 19332 Source Name Arnold Creek @ Davis Withdrawal Source Latitude: 39.302006 Jonathon Davis Source Longitude: -80.824561 HUC-8 Code: 5030201 Anticipated withdrawal start date: 10/27/2013 Drainage Area (sq. mi.): 20.83 Doddridge Anticipated withdrawal end date: 10/27/2014 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 9,270,000 Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 1,000 Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Gauged Stream? Max. Truck pump rate (gpm) 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug 458.00 Drainage Area (sq. mi.) 45 Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	22.34	5.30	17.29
2	28.10	5.30	23.05
3	31.44	5.30	26.39
4	23.35	5.30	18.30
5	12.32	5.30	7.26
6	4.30	5.30	-0.75
7	2.43	5.30	-2.62
8	2.00	5.30	-3.05
9	1.03	5.30	-4.03
10	1.29	5.30	-3.76
11	6.30	5.30	1.25
12	15.39	5.30	10.34

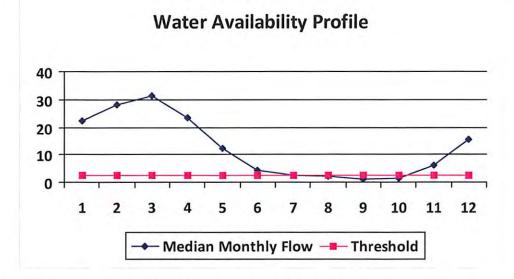

0.51
0.51
2.23
0.00
0.00
2.05

WMP-01277 API/ID Number: Heflin	047-017-06301 Operator: Antero Resources Unit 2H
Source ID: 19333 Source Name Buckeye Creek @ Powell With Dennis Powell	thdrawal Source Latitude: 39.277142 Source Longitude: -80.690386
HUC-8 Code: 5030201 Drainage Area (sq. mi.): 31.15 County: Doc Endangered Species? ✓ Mussel Stream? Trout Stream? ☐ Tier 3? Regulated Stream?	Anticipated withdrawal start date: 10/27/2013 Anticipated withdrawal end date: 10/27/2014 Total Volume from Source (gal): 9,270,000 Max. Pump rate (gpm): 1,000
☐ Proximate PSD? ☐ Gauged Stream?	Max. Simultaneous Trucks: 0 Max. Truck pump rate (gpm) 0
Reference Gaug 3114500 MIDDLE ISLAND CRED Drainage Area (sq. mi.) 458.00	EK AT LITTLE, WV Gauge Threshold (cfs): 45


Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	33.41	6.82	26.95
2	42.02	6.82	35.56
3	47.02	6.82	40.56
4	34.92	6.82	28.46
5	18.42	6.82	11.96
6	6.43	6.82	-0.03
7	3.64	6.82	-2.82
8	3.00	6.82	-3.46
9	1.53	6.82	-4.92
10	1.93	6.82	-4.53
11	9.42	6.82	2.96
12	23.01	6.82	16.55

Water Availability Profile Median Monthly Flow — Threshold

Min. Gauge Reading (cfs): Passby at Location (cfs):	69.73 4.59
Ungauged Stream Safety (cfs):	0.77
Headwater Safety (cfs):	0.77
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	3.06

WMP-01277	API/ID Number: Heflin	047-017-06301 n Unit 2H	Operator: Antero	Resources
Source ID: 19334 Source Nam	e South Fork of Hughes River Tracy C. Knight & Stephanie	And the second s		.198369 0.870969
Drainage Area (sq. mi.): ✓ Endangered Species? ✓	30203	Ritchie Antici Antic	pated withdrawal start date: ipated withdrawal end date: al Volume from Source (gal): Max. Pump rate (gpm):	10/27/2013 10/27/2014 9,270,000 3,000
☐ Proximate PSD? ✓ Gauged Stream?			Max. Simultaneo	
Reference Gaug 315 Drainage Area (sq. mi.)	SS220 SOUTH FORK HUGH	HES RIVER BELOW MACE	ARLAN, WV Gauge Threshold (cfs):	22

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45.67	14.26	31.44
2	59.55	14.26	45.31
3	65.21	14.26	50.97
4	36.87	14.26	22.63
5	25.86	14.26	11.63
6	13.90	14.26	-0.33
7	6.89	14.26	-7.34
8	3.98	14.26	-10.25
9	4.79	14.26	-9.45
10	5.20	14.26	-9.04
11	15.54	14.26	1.30
12	32.06	14.26	17.82

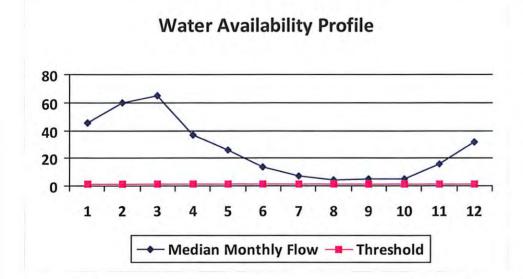


Min. Gauge Reading (cfs): Passby at Location (cfs):	39.80 1.95
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.39
Pump rate (cfs):	6.68
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	5.62
Base Threshold (cfs):	1.56

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01277		API/ID Number:	047-017-0630	1 Operator: Antero	Resources
		Не	eflin Unit 2H		
Source ID: 19335 So	urce Name	North Fork of Hughes Riv	ver @ Davis Withdra	wal Source Latitude: 39	9.322363
		Lewis P. Davis and Norm	a J. Davis	Source Longitude: -8	0.936771
HUC-8 Code: Drainage Area ✓ Endangered Species ☐ Trout Stream? ☐ Regulated Stream?		15.18 County:	Ritchie	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm):	10/27/2013 10/27/2014 9,270,000 1,000
☐ Proximate PSD? ☐ Gauged Stream?				Max. Simultaneo Max. Truck pump	

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	42.64	4.42	38.36
2	55.59	4.42	51.32
3	60.88	4.42	56.60
4	34.42	4.42	30.14
5	24.15	4.42	19.87
6	12.98	4.42	8.70
7	6.44	4.42	2.16
8	3.72	4.42	-0.56
9	4.47	4.42	0.19
10	4.85	4.42	0.57
11	14.50	4.42	10.23
12	29.93	4.42	25.65

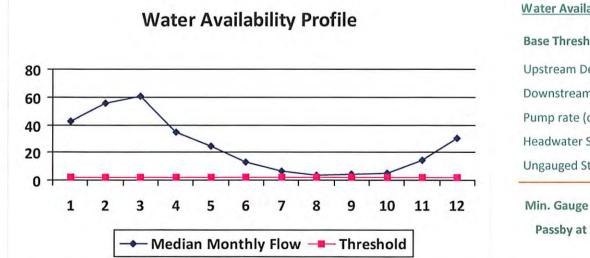

Min. Gauge Reading (cfs): Passby at Location (cfs):	35.23 2.19
Ungauged Stream Safety (cfs):	0.36
Headwater Safety (cfs):	0.36
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	1.46

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01277

API/ID Number

047-017-06301

Operator:

Antero Resources

Heflin Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 19340 Source Name

City of Salem Reservior (Lower Dog Run)

Source start date:

10/27/2013

Public Water Provider

Source end date:

10/27/2014

Source Lat:

39.28834

Source Long:

-80.54966

County

Harrison

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

9,270,000

WMP-01277 API/ID Number 047-017-06301 Operator: Antero Resources

Heflin Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 19341 Source Name Pennsboro Lake Source start date: 10/27/2013

10/27/2014 Source end date:

39.281689 -80.925526 Ritchie Source Long: County Source Lat:

Total Volume from Source (gal): 9,270,000 Max. Daily Purchase (gal)

DEP Comments:

Powers Lake (Wilderness Water Park Dam) Source ID: 19342 Source Name 10/27/2013 Source start date: Private Owner 10/27/2014 Source end date:

Source Long:

Harrison -80.463262

County

Total Volume from Source (gal): 9,270,000 Max. Daily Purchase (gal)

DEP Comments:

Source Lat:

39.255752

WMP-01277 API/ID Number 047-017-06301 Operator: Antero Resources

Heflin Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Powers Lake Two Source ID: 19343 Source Name 10/27/2013 Source start date:

Source end date: 10/27/2014

Harrison 39.247604 -80.466642 County Source Lat: Source Long:

Max. Daily Purchase (gal) Total Volume from Source (gal): 9,270,000

Heflin Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Other

Source ID: 19344 Source Name Poth Lake (Landowner Pond) Source start date:

Private Owner

Source start date: 10/27/2013 Source end date: 10/27/2014

Source Lat: 39.221306 Source Long: -80.463028 County Harrison

Max. Daily Purchase (gal)

Total Volume from Source (gal): 9,270,000

DEP Comments:

Source ID: 19345 Source Name Williamson Pond (Landowner Pond) Source start date: 10/27/2013

Source end date: 10/27/2014

Source Lat: 39.19924 Source Long: -80.886161 County Ritchie

Max. Daily Purchase (gal) Total Volume from Source (gal): 9,270,000

Heflin Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 19346 Source Name Eddy Pond (Landowner Pond) Source start date: 10/27/2013

Source end date: 10/27/2014

Source Lat: 39.19924 Source Long: -80.886161 County Ritchie

Max. Daily Purchase (gal) Total Volume from Source (gal): 9,270,000

DEP Comments:

Source ID: 19347 Source Name Hog Lick Quarry Source start date: 10/27/2013 Industrial Facility Source end date: 10/27/2014

Source Lat: 39.419272 Source Long: -80.217941 County Marion

Max. Daily Purchase (gal) 1,000,000 Total Volume from Source (gal): 9,270,000

Heflin Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 19348 Source Name

Source Lat:

Glade Fork Mine

Source start date: Source end date: 10/27/2013 10/27/2014

Industrial Facility

38.965767

-80.299313 Source Long:

County

Upshur

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

9,270,000

DEP Comments:

Recycled Frac Water

Source ID: 19349 Source Name

Gavin Unit 1H

Source start date:

10/27/2013

Source end date:

10/27/2014

Source Lat:

Source Long:

County

Max. Daily Purchase (gal)

Total Volume from Source (gal):

9,270,000

