

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: HALL, IRENE M. - TRUST Operator Well No.: 6377

LOCATION: Elevation: 1404' Quadrangle: Camden
District: Freemans Creek County: Lewis
Latitude: 9,780 Feet South of 39° Deg. 05' Min. 00" Sec.
Longitude: 5,505 Feet West of 80° Deg. 32' Min. 30 Sec.

RECEIVED
Office of Oil and Gas
APR 06 2023
WV Department of
Environmental Protection

Well Type: OIL _____ GAS X

Company Diversified Production, LLC Coal Operator NA
414 Summers Street or Owner _____
Charleston, WV 25330 _____
Agent Sam Ward Diane White Coal Operator NA
Permit Issued Date 4/26/2022 or Owner _____

AFFIDAVIT


STATE OF WEST VIRGINIA,
County of Lewis ss:

Reece Linna and John Phillips being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 2nd day of February, 2023, and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
SEE ATTACHMENT A				

Description of monument: Monument to be installed later. Currently swedge on well to monitor during frac ops and that the work of plugging and filling said well was completed on the 2nd day of March, 2023.

And further deponents saith not. Reece Linna
John Phillips

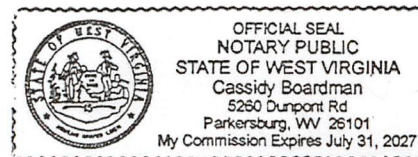

Sworn and subscribe before me this 31st day of MARCH, 2023

My commission expires: 7/31/2027 Cassidy Boardman
Notary Public

Affidavit reviewed by the Office of Oil and Gas: Kenneth Grey holds

04/14/2023

TYPE	FROM	TO	PIPE REMOVED	PIPE LEFT
Cement plug #1	5,800'	5,000'	Open hole/prior removed	1,649' 9-5/8"
Cement plug #2	5,000'	4,200'	Open hole/prior removed	
Cement plug #3	4,200'	3,400'	Open hole/prior removed	
Cement plug #4	3,400'	2,600'	Open hole/prior removed	1,649' 9-5/8"
Cement plug #5	2,600'	1,700'	1,550' 4-1/2"	1,028' 4-1/2"
CIBPS	AT 1,680'	AT 1,670'		
Cement plug #6	1,670'	1,300'		
6% Bentonite Gel	1,300'	100'		
Cement plug #7	100'	0'		24' of 13"

Notes:

- Well was prior plugged
- Received Approval from to install cap to monitor during frac, will fill and install monument after frac watch.

RECEIVED
Office of Oil and Gas
APR 06 2023
WV Department of
Environmental Protection

04/14/2023